



ConTeXt

comenzile

RO

ConTeXt

comenzile

language : ro / română
version : 10 septembrie 2026
maintainer : Wolfgang Schuster
comments : ntg-context@ntg.nl

<code>\AfterPar {...}</code> * BEFEHL
<code>\Alphabeticnumerals {...}</code> * NUMMER
<code>\AMSTEX</code>
<code>\AmSTeX</code>
<code>\abjadnaivenumerals {...}</code> * NUMMER
<code>\abjadnodotnumerals {...}</code> * NUMMER
<code>\abjadnumerals {...}</code> * NUMMER
<code>\activatespacehandler {...}</code> * on dezactivat da fixat
<code>\actualday</code>
<code>\actualmonth</code>
<code>\actualyear</code>
<code>\adaptcollector [.¹.] [...,²...,...]</code> 1 NAME OPT 2 inherits: \setupcollector
<code>\adapteazaaspect [...,¹...] [...,²...,...]</code> 1 NUMMER OPT 2 inalttime = max DIMENSION linii = NUMMER sus = DIMENSION
<code>\adaptfontfeature [.¹.] [...,²...,...]</code> 1 NAME 2 inherits: \definefontfeature
<code>\adaptive \.¹ {.².}</code> 1 CSNAME 2 CONTENT
<code>\adaptivebox [.¹.] [...,²...,...] {.³.}</code> 1 NAME OPT OPT 2 inherits: \setupadaptive 3 CONTENT
<code>\adaptivehbox [.¹.] [...,²...,...] {.³.}</code> 1 NAME OPT OPT 2 inherits: \setupadaptive 3 CONTENT
<code>\adaptivevbox [.¹.] [...,²...,...] {.³.}</code> 1 NAME OPT OPT 2 inherits: \setupadaptive 3 CONTENT

$\backslash$ adaptpapersize [... ¹ ,...] [... ² ,...] 1 inherits: \seteazadimensiunihartie ^{OPT} 2 inherits: \seteazadimensiunihartie
$\backslash$ addfeature [...] * NAME
$\backslash$ addfeature {...} * NAME
$\backslash$ addriverstobox [... ¹ ... ² ,...] ... 1 margine = DIMENSION ^{OPT} pas = DIMENSION inaltime = DIMENSION inaltime = DIMENSION spaceinbetween = DIMENSION 2 CSNAME NUMBER
$\backslash$ addtocommalist {... ¹ } \... ² 1 TEXT 2 CSNAME
$\backslash$ addtoJSreamble {... ¹ } {... ² } 1 NAME 2 CONTENT
$\backslash$ addvalue {... ¹ } {... ² } 1 NAME 2 TEXT
$\backslash$ adubuffer [... ^{OPT} ,...] * BUFFER
$\backslash$ getBUFFER
$\backslash$ adumarcaje [... ¹] [... ²] [... ³] 1 BESCHRIFTUNG ^{OPT} ^{OPT} 2 pagina NAME NUMMER 3 primul ultim curent precedent urmatorul sus subsol implicit ambele tot first:nocheck last:nocheck previous:nocheck next:nocheck top:nocheck bottom:nocheck
$\backslash$ afiseazaaspect [... ^{OPT} ,...] * pt bp cm mm dd cc pc nd ff sp in NUMMER
$\backslash$ afiseazaculoare [...] * COLOR
$\backslash$ afiseazafonttext [... ^{OPT} ,...] * inherits: \seteazafonttext
$\backslash$ afiseazagrid [... ^{OPT} ,...] * reset subsol sus niciul tot linii incadrat nonumber dreapta stanga extern intern coloane
$\backslash$ afiseazagrupculoare [... ¹] [... ² ,...] ^{OPT} 1 NAME 2 orizontal vertical numar valoare nume
$\backslash$ afiseazamakeup [...] * reset boxes marcaj tot ^{OPT} hbox vbox vtop kern glue penalty fontkern strut whatsit glyph simple simplehbox simplevbox simplevtop user math italic origin discretionary expansion linie spatiu adancime marginkern mathkern dir par mathglue mark insert boundary vkern hkern vglue hglue vpenalty hpenalty

<code>\afiseazamediufonttext</code> [...,*,...] * inherits: \seteazafonttext
<code>\afiseazapaleta</code> [...¹...] [...²,...] 1 NAME OPT 2 orizontal vertical numar valoare nume
<code>\afiseazarama</code> [...¹,...] 1 sus antet text subsol ²subsol OPT 2 bordurastanga marginestanga text marginedreapta borduradreapta
<code>\afiseazasetari</code> [...,*,...] * pt bp cm mm dd cc pc nd ²pc sp in
<code>\afiseazasetsimboluri</code> [...*...] * NAME
<code>\afiseazastruts</code>
<code>\afiseazatiparire</code> [...¹,...] 1 inherits: \seteazadimensiunifhartie OPT 2 inherits: \seteazadimensiunihartie OPT 3 inherits: \seteazaaspect OPT
<code>\aftersplitstring</code> ...¹ \at ...² \to \...³ 1 TEXT 2 TEXT 3 CSNAME
<code>\aftertestandsplitstring</code> ...¹ \at ...² \to \...³ 1 TEXT 2 TEXT 3 CSNAME
<code>\aldin</code>
<code>\aldininclinat</code>
<code>\aldinitalic</code>
<code>\alignanchor</code> {...¹} {...²} {...³} {...⁴} 1 NAME 2 NUMMER 3 NUMMER 4 r dreapta c m centru
<code>\alignbottom</code>
<code>\aligncontentleft</code>
<code>\aligncontentmiddle</code>
<code>\aligncontentright</code>
<code>\aligned</code> [...¹,...] 1 stanga centru dreapta sus subsol linie l c r m t b g 2 CONTENT

<code>\alignedbox</code> [..., ¹ ...] \... {...} 1 stanga centru dreapta sus subsol linie l c r m t b g 2 CSNAME 3 CONTENT
<code>\alignedline</code> {...} {...} {...} 1 stanga dreapta centru flushleft flushright center max intern extern innermargin outermargin inneredge outeredge spatiuspate cutspace marginestanga marginedreapta bordurastanga borduradreapta 2 stanga dreapta centru flushleft flushright center max intern extern innermargin outermargin inneredge outeredge spatiuspate cutspace marginestanga marginedreapta bordurastanga borduradreapta 3 CONTENT
<code>\alignhere</code>
<code>\alignmentcharacter</code>
<code>\aliniatcentru</code> {...} * CONTENT
<code>\aliniatdreapta</code> {...} * CONTENT
<code>\aliniatstanga</code> {...} * CONTENT
<code>\allinputpaths</code>
<code>\allowbreak</code>
<code>\allowhbreak</code>
<code>\allowvbreak</code>
<code>\alphabeticnumerals</code> {...} * NUMMER
<code>\alternate</code> {...} {...} 1 TEXT 2 CONTENT
<code>\alwayscitation</code> [..., ¹ ...,...] [... ² .] 1 referinta = REFERENCE ^{OPT} alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 REFERENCE
<code>\alwayscitation</code> [... ¹ .] [... ² .] 1 implicit category entry ^{OPT} short pagina num textnum an index tag keywords autor authoryears authornum authoryear 2 REFERENCE

```

\alwayscitation [...1...2...] [...2...]
1 referinta = REFERENCE
  alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
              authoryear
  inainte   = BEFEHL
  dupa      = BEFEHL
  stanga    = BEFEHL
  dreapta   = BEFEHL
  inherits: \setupbtx
2 KEY = VALUE

```

```

\alwayscite [...1...2...] [...2]
1 referinta = REFERENCE
  alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
              authoryear
  inainte   = BEFEHL
  dupa      = BEFEHL
  stanga    = BEFEHL
  dreapta   = BEFEHL
  inherits: \setupbtx
2 REFERENCE

```

```

\alwayscite [...1] [...2]
1 implicit categoryOPTentry short pagina num textnum an index tag keywords autor authoryears authornum authoryear
2 REFERENCE

```

```

\alwayscite [...1...2...] [...2...]
1 referinta = REFERENCE
  alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
              authoryear
  inainte   = BEFEHL
  dupa      = BEFEHL
  stanga    = BEFEHL
  dreapta   = BEFEHL
  inherits: \setupbtx
2 KEY = VALUE

```

```

\amedian {...}
* CONTENT

```

```

\ampersand

```

```

\analyzelocalanchors ...
* CSNAME NUMBER

```

```

\anchor [...1] [...2...3...] [...3...4...] {...4}
1 NAME
2 inherits: \setupplayer
3 inherits: \setupplayerinherits: \seteazainconjurat
4 CONTENT

```

```

\ap [...]
* NUMBER

```

```

\appendetoks ...1 \to ...2
1 BEFEHL
2 CSNAME

```

```

\appendgvalue {...1} {...2}
1 NAME
2 BEFEHL

```

```

\appendhiddenbackground {...*...}
* NAME

```

```
1 TEXT
2 CSNAME
```

```
1  BEFEHL
2  CSNAME
```

```
1  BEFEHL
2  CSNAME
```

1	NAME
2	BEFEHL

1 CONTENT

2 CONTENT

* NAME

```

1  NAME                                OPT
2  nume                                = NAME
   latime                             = DIMENSION
   inaltime                           = DIMENSION

```

1	NAME
2	CONTENT

```

1 CSNAME
2 TEXT

```

```

1 CSNAME
2 TEXT

```

```

1  CSNAME
2  TEXT

```

```

1  CSNAME
2  TEXT

```

```

1 CSNAME
2 TEXT

```

```

1  CSNAME
2  TEXT

```

```

1 CSNAME
2 TEXT

```

\applytosplitstringwordspaced \ ¹ ... { ² ...} 1 CSNAME 2 TEXT
\applytowords \ ¹ ... { ² ...} 1 CSNAME 2 TEXT
\arabicdecimals { [*] ...} * NUMBER
\arabicexnumerals { [*] ...} * NUMBER
\arabicnumerals { [*] ...} * NUMBER
\arg { [*] ...} * CONTENT
\asciimode
\asciistr { [*] ...} * CONTENT
\ascundeblocuri [..., ¹ ...] [..., ² ...] 1 NAME OPT 2 NAME
\assignalfadimension { ¹ ...} \ ² ... { ³ ...} { ⁴ ...} { ⁵ ...} 1 mic mediu mare niciunul DIMENSION 2 CSNAME 3 DIMENSION 4 DIMENSION 5 DIMENSION
\assigndimen \ ¹ ... { ² ...} 1 CSNAME 2 DIMENSION
\assigndimension { ¹ ...} \ ² ... { ³ ...} { ⁴ ...} { ⁵ ...} 1 [-+]mic [-+]mediu [-+]mare niciunul DIMENSION 2 CSNAME 3 DIMENSION 4 DIMENSION 5 DIMENSION
\assignifempty \ ¹ ... { ² ...} 1 CSNAME 2 BEFEHL
\assigntranslation [..., ¹ ...,...] \to \ ² ... 1 SPRACHE = TEXT 2 CSNAME
\assignvalue { ¹ ...} \ ² ... { ³ ...} { ⁴ ...} { ⁵ ...} 1 mic mediu mare TEXT 2 CSNAME 3 BEFEHL 4 BEFEHL 5 BEFEHL

```
\assignwidth  {1...}  \2...  {3...}  {4...}
1  ajustat broad DIMENSION
2  CSNAME
3  TEXT
4  DIMENSION
```

<pre>\assumelongusagecs \... {...}</pre> <pre>1 CSNAME</pre> <pre>2 CONTENT</pre>

```
\asttype    {...}
*   CONTENT
```

```
\async {...} ... {...}
```

```
1 NAME
```

```
2 NUMMER
```

```
3 r dreapta c m centru
```

<pre>\attachinsert {...} * CONTENT</pre>

<pre>\attachinsertion .¹.. \.².. 1 NUMBER 2 CSNAME</pre>
--

```
\attachinsertions \*...
* CSNAME
```

```
\ATTACHMENT  [...1] [...2...]
1  NAME      OPT      OPT
2  inherits: \setupattachment
instances: attachment
```

```
\attachment    [..1]    [...2...]
1  NAME                OPT                OPT
2  inherits: \setupattachment
```

<code>\autobigmath</code>

$\backslash\mathrm{autocap} \quad \{...\}$ * TEXT
--

\autodirhbox	¹	{ ² .}
1 TEXT	OPT	
2 CONTENT		

\autodirvbox	$\overset{1}{\dots}$	$\{\overset{2}{\dots}\}$
1	TEXT	OPT
2	CONTENT	

\autodirvtop		...	{...}
1	TEXT	OPT	
2	CONTENT		

<code>\autoinsertnextspace</code>

\autointegral	{\.^1.}	{\.^2.}	{\.^3.}	
1	TEXT			
2	TEXT			
3	TEXT			

<code>\automathematics {...}</code> * CONTENT
<code>\automathtext</code>
<code>\autoorientation {...}</code> * normal up down stanga dreapta sus subsol NAME
<code>\autopagestaterealpage {...}</code> * NAME
<code>\autopagestaterealpageorder {...}</code> * NAME
<code>\autoreferencedetailtext</code>
<code>\autoreferencekindtext</code>
<code>\autoreferencelabeltext</code>
<code>\autoreferencenametext</code>
<code>\autorule \relax</code> * width_DIMENSION height_DIMENSION depth_DIMENSION xoffset_DIMENSION yoffset_DIMENSION left_DIMENSION right_DIMENSION
<code>\autosetups {...,*...}</code> * NAME
<code>\autostarttext ... \autostoptext</code>
<code>\autosync {...} {...}</code> 1 NAME 2 NUMMER
<code>\availablehsize</code>
<code>\averagecharwidth</code>
<code>\BeforePar {...}</code> * BEFEHL
<code>\Big ...</code> * CHARACTER
<code>\Bigg ...</code> * CHARACTER
<code>\Biggl ...</code> * CHARACTER
<code>\Biggm ...</code> * CHARACTER
<code>\Biggr ...</code> * CHARACTER

$\backslash\text{Bigl}$ $\dots$ * CHARACTER
$\backslash\text{Bigm}$ $\dots$ * CHARACTER
$\backslash\text{Bigr}$ $\dots$ * CHARACTER
$\backslash\text{backgroundimage}$ $\{.^1..\}$ $\{.^2..\}$ $\{.^3..\}$ $\{.^4..\}$ 1 NUMMER 2 DIMENSION 3 DIMENSION 4 BEFEHL
$\backslash\text{backgroundimagefill}$ $\{.^1..\}$ $\{.^2..\}$ $\{.^3..\}$ $\{.^4..\}$ 1 NUMMER 2 DIMENSION 3 DIMENSION 4 BEFEHL
$\backslash\text{backgroundline}$ $[.^1..]$ $\{.^2..\}$ 1 COLOR 2 CONTENT
$\backslash\text{balancesubcolumnsets}$ $[.^*..]$ * spread OPT
$\backslash\text{baraculoare}$ $[...^*,...]$ * COLOR
$\backslash\text{barainteractiune}$ $[.^1..]$ $[...^2...]$ 1 NAME OPT OPT 2 inherits: \seteazabarainteractiune
$\backslash\text{BAR}$ $\{.^*..\}$ * CONTENT instances: overbar underbar overstrike understrike overbars underbars overstrikes understrikes hiddenbar outline outlined backgroundbar mathbackground undergraphic underrandom underrandoms underdash underdashes underdot underdots
$\backslash\text{backgroundbar}$ $\{.^*..\}$ * CONTENT
$\backslash\text{hiddenbar}$ $\{.^*..\}$ * CONTENT
$\backslash\text{mathbackground}$ $\{.^*..\}$ * CONTENT
$\backslash\text{outline}$ $\{.^*..\}$ * CONTENT
$\backslash\text{outlined}$ $\{.^*..\}$ * CONTENT
$\backslash\text{overbar}$ $\{.^*..\}$ * CONTENT

<pre> \basegrid [...,*=...,...] * nx = NUMMER ny = NUMMER dx = NUMMER dy = NUMMER factor = NUMMER scala = NUMMER xstep = NUMMER ystep = NUMMER offset = DIMENSION xoffset = DIMENSION yoffset = DIMENSION aliniere = centru unitate = cm mm in pc pt bp stil = STYLE BEFEHL culoare = COLOR culoarerigla = COLOR grosimerigla = DIMENSION </pre>
<pre> \baselinebottom </pre>
<pre> \baselineleftbox {...} * CONTENT </pre>
<pre> \baselinemiddlebox {...} * CONTENT </pre>
<pre> \baselinerightbox {...} * CONTENT </pre>
<pre> \bbordermatrix {...} * CONTENT </pre>
<pre> \bbox {...} * CONTENT </pre>
<pre> \beforesplitstring ...¹ \at ...² \to \...³ 1 TEXT 2 TEXT 3 CSNAME </pre>
<pre> \beforetestandsplitstring ...¹ \at ...² \to \...³ 1 TEXT 2 TEXT 3 CSNAME </pre>
<pre> \beginBLOCK [...,¹...] [...,²...,...] ... \endBLOCK 1 + - NAME OPT OPT 2 KEY = VALUE </pre>
<pre> \beginhbox ... \endhbox </pre>
<pre> \beginofshapebox ... \endofshapebox </pre>
<pre> \beginvbox ... \endvbox </pre>
<pre> \beginvtop ... \endvtop </pre>
<pre> \begstrut ... \endstrut </pre>
<pre> \bengalinumerals {...} * NUMMER </pre>

<code>\bigbodyfont</code>
<code>\bigbreak</code>
<code>\bigg ...</code> <code>* CHARACTER</code>
<code>\bigger</code>
<code>\biggl ...</code> <code>* CHARACTER</code>
<code>\biggm ...</code> <code>* CHARACTER</code>
<code>\biggr ...</code> <code>* CHARACTER</code>
<code>\bigl ...</code> <code>* CHARACTER</code>
<code>\bigm ...</code> <code>* CHARACTER</code>
<code>\bigmath</code>
<code>\bigr ...</code> <code>* CHARACTER</code>
<code>\bigskip</code>
<code>\bitmapimage [...,..¹...,..] {...²}</code> 1 culoare = rgb cmyk gri latime = DIMENSION inaltime = DIMENSION x = NUMMER y = NUMMER 2 NUMMER
<code>\blanc [...,*,...]</code> <code>* preferinta ac@easipagina max fortat enable dezactivat faraalb impachetat inapot overlay totdeauna mentine weak strong implicit inainte intre dupa fixat flexibil niciunul mic mediu mare linie jumatatelinie halflinebefore halflineafter quarterline formula alb inaltime adancime standard NUMMER*mic NUMMER*mediu NUMMER*mare NUMMER*linie NUMMER*jumatatelinie NUMMER*quarterline NUMMER*formula NUMMER*alb NUMMER*inaltime NUMMER*adancime category:NUMMER order:NUMMER penalty:NUMMER DIMENSION NAME</code>
<code>\blankafter [...,*,...]</code> <code>* inherits: \blanc</code>
<code>\blankbefore [...,*,...]</code> <code>* inherits: \blanc</code>
<code>\blap {...}</code> <code>* CONTENT</code>
<code>\bleedheight</code>

$\backslash$ bleeding [...] ¹ [...,... ² ...,...] ^{OPT} {...} ³ 1 NAME 2 inherits: \setupbleeding 3 CONTENT
$\backslash$ bleedwidth
$\backslash$ BLEED [...,... ¹ ...,...] ^{OPT} {...} ² 1 inherits: \setupbleeding 2 CONTENT instances: bleed
$\backslash$ bleed [...,... ¹ ...,...] ^{OPT} {...} ² 1 inherits: \setupbleeding 2 CONTENT
$\backslash$ blockcolumnsetrows
$\backslash$ blockligatures [...,*,...] * TEXT
$\backslash$ blocksynctexfile [...,*,...] * FILE
$\backslash$ blockuservariable {...} * KEY
$\backslash$ bodyfontenvironmentlist
$\backslash$ bodyfontsize
$\backslash$ boldface
$\backslash$ booleanmodevalue {...} * NAME
$\backslash$ bordermatrix {...} * CONTENT
$\backslash$ bottombox {...} * CONTENT
$\backslash$ bottomleftbox {...} * CONTENT
$\backslash$ bottomrightbox {...} * CONTENT
$\backslash$ boxanchorpresetcode {...} * linie inalttime adancime stanga left,height left,top left,depth left,bottom dreapta right,height right,top right,depth right,bottom centru middle,height middle,top middle,depth middle,bottom middle,left middle,right
$\backslash$ boxcursor
$\backslash$ boxfixstretch ... ¹ ... ² 1 DIMENSION 2 CSNAME NUMBER

<code>\boxmarker</code> $\{...\}^1$ $\{...\}^2$ 1 NAME 2 NUMMER
<code>\boxofsize</code> $\backslash...^1$ $...^2$ $...^3$ $\{...\}$ 1 CSNAME 2 DIMENSION 3 CONTENT
<code>\boxreference</code> $[...,\dots]^1$ $\backslash...^2$ $\{...\}^3$ 1 REFERENCE 2 CSNAME 3 CONTENT
<code>\bpar ... \epar</code>
<code>\bpos</code> $\{...\}$ * NAME
<code>\break</code>
<code>\breakhere</code> $[...,\dots]^1$ $\{...\}^2$ 1 stanga dreapta înainte dupa pagina aceeasipagina 2 TEXT
<code>\bTABLE</code> $[...,\dots]^*$ $...^*$ <code>\eTABLE</code> * inherits: <code>\setupTABLE</code>
<code>\bTABLEbody</code> $[...,\dots]^*$ $...^*$ <code>\eTABLEbody</code> * inherits: <code>\setupTABLE</code> ^{OPT}
<code>\bTABLEfoot</code> $[...,\dots]^*$ $...^*$ <code>\eTABLEfoot</code> * inherits: <code>\setupTABLE</code> ^{OPT}
<code>\bTABLEhead</code> $[...,\dots]^*$ $...^*$ <code>\eTABLEhead</code> * inherits: <code>\setupTABLE</code> ^{OPT}
<code>\bTABLEnested</code> $[...,\dots]^*$ $...^*$ <code>\eTABLEnested</code> * inherits: <code>\setupTABLE</code> ^{OPT}
<code>\bTABLEnext</code> $[...,\dots]^*$ $...^*$ <code>\eTABLEnext</code> * inherits: <code>\setupTABLE</code> ^{OPT}
<code>\bTABLEsection</code> $[...,\dots]^*$ $...^*$ <code>\eTABLEsection</code> * repeta = NUMMER ^{OPT}
<code>\bTC</code> $[...,\dots]^*$ $...^*$ <code>\eTC</code> * inherits: <code>\bTD</code>
<code>\bTD</code> $[...,\dots]^*$ $...^*$ <code>\eTD</code> * nx = NUMMER ny = NUMMER nc = NUMMER nr = NUMMER n = NUMMER m = NUMMER actiune = REFERENCE inherits: <code>\setupTABLE</code>

\btDs [...] [*] ... \eTds * NAME
\bTH [...] [*] ... [...] [*] ... \eTH * inherits: \bTD ^{OPT}
\bTN [...] [*] ... [...] [*] ... \eTN * inherits: \bTD ^{OPT}
\bTR [...] [*] ... [...] [*] ... \eTR * inherits: \setupTABLE
\bTRs [...] [*] ... \eTRs * NAME
\bTX [...] [*] ... [...] [*] ... \eTX * inherits: \bTD ^{OPT}
\bTY [...] [*] ... [...] [*] ... \eTY * inherits: \setupTABLE
\btX ... \etX
\btXabbreviatedjournal {...} [*] * NAME
\btXaddjournal [...] ¹ [...] ² 1 NAME 2 NAME
\btXalwayscitation [...] ¹ ... [...] ² 1 referinta = REFERENCE ^{OPT} alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtX 2 REFERENCE
\btXalwayscitation [...] ¹ [...] ² 1 implicit category entry short ^{OPT} pagina num textnum an index tag keywords autor authoryears authornum authoryear 2 REFERENCE
\btXalwayscitation [...] ¹ ... [...] ² ... [...] ² ... [...] ² 1 referinta = REFERENCE alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtX 2 KEY = VALUE
\btXauthorfield {...} [*] * initials firstnames vons surnames juniors
\btXdetail {...} [*] * address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME

<pre> \btxdirect {...} * address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME </pre>
<pre> \btxdoif {...} {...} 1 address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME 2 TRUE </pre>
<pre> \btxdoifcitedoneelse {...} {...} {...} {...} 1 NAME 2 REFERENCE 3 TRUE 4 FALSE </pre>
<pre> \btxdoifcombiinlistelse {...} {...} {...} {...} 1 NAME 2 NAME 3 TRUE 4 FALSE </pre>
<pre> \btxdoifelse {...} {...} {...} 1 address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME 2 TRUE 3 FALSE </pre>
<pre> \btxdoifelsecitedone {...} {...} {...} {...} 1 NAME 2 REFERENCE 3 TRUE 4 FALSE </pre>
<pre> \btxdoifelsecombiinlist {...} {...} {...} {...} 1 NAME 2 NAME 3 TRUE 4 FALSE </pre>
<pre> \btxdoifelsesameasprevious {...} {...} {...} 1 address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME 2 TRUE 3 FALSE </pre>
<pre> \btxdoifelsesameaspreviouschecked {...} {...} {...} {...} 1 totdeauna douafete 2 address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME 3 TRUE 4 FALSE </pre>
<pre> \btxdoifelseuservariable {...} {...} {...} 1 KEY 2 TRUE 3 FALSE </pre>
<pre> \btxdoifnot {...} {...} 1 address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME 2 TRUE </pre>

<pre> \btxdfsameaspreviouscheckedelse {...} {...} {...} {...} 1 totdeauna douafete 2 address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME 3 TRUE 4 FALSE </pre>
<pre> \btxdfsameaspreviouselse {...} {...} {...} 1 address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME 2 TRUE 3 FALSE </pre>
<pre> \btxdfuservariableelse {...} {...} {...} 1 KEY 2 TRUE 3 FALSE </pre>
<pre> \btfxexpandedjournal {...} * NAME </pre>
<pre> \btxfieldd {...} * address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME </pre>
<pre> \btxfielddname {...} * address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME </pre>
<pre> \btxfielddtype {...} * address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME </pre>
<pre> \btxfirstofrange {...} * volume pages </pre>
<pre> \btxfldflush {...} * address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME </pre>
<pre> \btxfldflushauthor [...¹] {...} 1 num normal normalshort^{OPT}inverted invertedshort 2 autor editor </pre>
<pre> \btxfldflushauthorinverted {...} * autor editor </pre>
<pre> \btxfldflushauthorinvertedshort {...} * autor editor </pre>
<pre> \btxfldflushauthorname {...} * autor editor </pre>
<pre> \btxfldflushauthornormal {...} * autor editor </pre>

\btxflushauthornormalshort {...} * autor editor
\btxflushsuffix
\btxfoundname {...} * address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME
\btxfoundtype {...} * address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME
\btxhiddencitation [...] * REFERENCE
\btxhybridcite [..., ¹ ...,...] [... ² .] 1 referinta = REFERENCE ^{OPT} alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 REFERENCE
\btxhybridcite [... ¹ .] [... ² .] 1 implicit category entry ^{OPT} short pagina num textnum an index tag keywords autor authoryears authornum authoryear 2 REFERENCE
\btxhybridcite {...} * REFERENCE
\btxhybridcite [..., ¹ ...,...] [..., ² ...,...] 1 referinta = REFERENCE alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 KEY = VALUE
\btxlistcitation [..., ¹ ...,...] [... ² .] 1 referinta = REFERENCE ^{OPT} alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 REFERENCE
\btxlistcitation [... ¹ .] [... ² .] 1 implicit category entry ^{OPT} short pagina num textnum an index tag keywords autor authoryears authornum authoryear 2 REFERENCE

<pre> \btplistcitation [...,\¹...,...] [...,\²...,...] 1 referinta = REFERENCE alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 KEY = VALUE </pre>
<pre> \btloadjournalist [...] * FILE </pre>
<pre> \btoneorrange {...} {...} {...} 1 volume pages 2 TRUE 3 FALSE </pre>
<pre> \btxrawfield {...} * address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME </pre>
<pre> \btxremapauthor [...] [...] 1 TEXT 2 TEXT </pre>
<pre> \btxsavejournalist [...] * FILE </pre>
<pre> \btxsetup {...} * NAME </pre>
<pre> \btxsingularorplural {...} {...} {...} 1 editor producer director 2 TRUE 3 FALSE </pre>
<pre> \btxsingularplural {...} {...} {...} 1 editor producer director 2 TRUE 3 FALSE </pre>
<pre> \btxstarttaggedcite ... \btxstoptaggedcite </pre>
<pre> \btxttextcitation [...,\¹...,...] [...,\²...] 1 referinta = REFERENCE^{OPT} alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 REFERENCE </pre>
<pre> \btxttextcitation [...,\¹...] [...,\²...] 1 implicit category entry^{OPT}short pagina num textnum an index tag keywords autor authoryears authornum authoryear 2 REFERENCE </pre>

\btxttextcitation [...,¹...,...] [...,²...,...] 1 referinta = REFERENCE alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 KEY = VALUE
\buildtextaccent {...} {...} 1 CHARACTER 2 CHARACTER
\buildtextbottomcomma {...} * CHARACTER
\buildtextbottomdot {...} * CHARACTER
\buildtextcedilla {...} * CHARACTER
\buildtextgrave {...} * CHARACTER
\buildtextmacron {...} * CHARACTER
\buildtextognek {...} * CHARACTER
\butoaneinteractiune [...,¹...,...] [...,²...,...] 1 inherits: \seteazabarainteractiune^{OPT} 2 pagina subpagina REFERENCE
\buton [...,¹...,...] {...²} [...³] 1 inherits: \setupbutton^{OPT} 2 TEXT 3 REFERENCE
\butonmeniu [...,¹...,...] {...²} {...³} 1 inherits: \setupbutton 2 TEXT 3 REFERENCE
\butonmeniu [...¹] [...,²...,...] {...³} {...⁴} 1 NAME^{OPT} 2 inherits: \seteazameniuinteractiune 3 TEXT 4 REFERENCE
\BUTTON [...,¹...,...] {...²} [...³] 1 inherits: \setupbutton^{OPT} 2 TEXT 3 REFERENCE instances: button
\Camel {...} * TEXT

\Caps {...} * TEXT
\CONTEXT
\ConTeXt
\Context
\ConvertConstantAfter \ ¹ ... { ² ...} { ³ ...} 1 CSNAME 2 TEXT 3 TEXT
\ConvertToConstant \ ¹ ... { ² ...} { ³ ...} 1 CSNAME 2 TEXT 3 TEXT
\CUVANT {...} * TEXT
\CUVINTE {...} * TEXT
\Cuvant {...} * TEXT
\Cuvinte {...} * TEXT
\caligrafic
\camel {...} * TEXT
\camp [¹ ...] [² ...] 1 NAME OPT 2 TEXT
\cap {...} * TEXT
\casing [¹ ...] { ² ...} 1 reset CUVANT cuvant Cuvant Cuvinte majuscula Majuscula aleator mixed camel Camel cap Cap 2 CONTENT
\catcodetablename
\cbox ¹ ... { ² ...} 1 TEXT OPT 2 CONTENT
\centeraligned {...} * CONTENT

\centerbox ¹ ... { ² ...} 1 TEXT OPT 2 CONTENT
\centeredbox ¹ ... { ² ...} 1 TEXT OPT 2 CONTENT
\centeredlastline
\centerednextbox ¹ ... { ² ...} 1 TEXT OPT 2 CONTENT
\centerline {...} * CONTENT
\centru ... * CHARACTER
\chaintocurrentCOMANDA {...} * NAME
\CHARACTERKERNING [¹ ...] { ² ...} 1 NUMBER OPT 2 TEXT
\character table {...} * NAME
\character tsize {...} * NAME
\chardescription {...} * NUMBER
\charfreq ¹ ... ² ... 1 CHARACTER 2 NUMBER
\charwidthlanguage
\checkcharacter align {...} * CONTENT
\checkCOMANDaparent
\checkdelimiters {...} * CONTENT
\checkedblank [...*,...] * inherits: \blanc
\checkedchar { ¹ ...} { ² ...} 1 NUMBER 2 CHARACTER

<pre> \checkedfiller {...} * sym simbol rigla latime spatiu NAME BEFEHL </pre>
<pre> \checkedmapfontsize [...]¹ [...]² [...]³ 1 NAME 2 DIMENSION 3 DIMENSION </pre>
<pre> \checkedstrippedcsname *... * CSNAME </pre>
<pre> \checkinjector [...]¹ * NAME </pre>
<pre> \checkmissingcharacters </pre>
<pre> \checknextindentation [...]¹ * da nu auto </pre>
<pre> \checknextinjector [...]¹ * NAME </pre>
<pre> \checkpage [...]¹ [...]²...²... 1 NAME 2 inherits: \setuppagechecker </pre>
<pre> \checkparameters [...]¹ * TEXT </pre>
<pre> \checkpreviousinjector [...]¹ * NAME </pre>
<pre> \checksidefloat </pre>
<pre> \checkvariables [...]¹ [...]²...²... 1 NAME 2 set = BEFEHL reset = BEFEHL KEY = VALUE </pre>
<pre> \chem {...}¹ {...}² {...}³ 1 TEXT 2 TEXT 3 TEXT </pre>
<pre> \chemical [...]¹ [...]²...² [...]³...³ 1 NAME 2 TEXT 3 TEXT </pre>
<pre> \chemicalbottext {...}¹ * TEXT </pre>
<pre> \chemicalmidtext {...}¹ * TEXT </pre>
<pre> \chemicalsymbol [...]¹ * NAME </pre>

<pre> \chemicaltext {...} * TEXT </pre>
<pre> \chemicaltoptext {...} * TEXT </pre>
<pre> \chineseallnumerals {...} * NUMMER </pre>
<pre> \chinesecapnumerals {...} * NUMMER </pre>
<pre> \chinesenumerals {...} * NUMMER </pre>
<pre> \chr {...} * TEXT </pre>
<pre> \citation [...¹...¹] [...²] 1 referinta = REFERENCE alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 REFERENCE </pre>
<pre> \citation [...¹] [...²] 1 implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear 2 REFERENCE </pre>
<pre> \citation {...} * REFERENCE </pre>
<pre> \citation [...¹...¹] [...²...²] 1 referinta = REFERENCE alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 KEY = VALUE </pre>
<pre> \cite [...¹...¹] [...²] 1 referinta = REFERENCE alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 REFERENCE </pre>
<pre> \cite [...¹] [...²] 1 implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear 2 REFERENCE </pre>
<pre> \cite {...} * REFERENCE </pre>

<pre> \cite [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] 1 referinta = REFERENCE alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 KEY = VALUE </pre>
<pre> \clap {...} * CONTENT </pre>
<pre> \classfont {...} {...} 1 NAME 2 FONT </pre>
<pre> \cldcommand {...} * BEFEHL </pre>
<pre> \cldcontext {...} * BEFEHL </pre>
<pre> \cldloadfile {...} * FILE </pre>
<pre> \cldprocessfile {...} * FILE </pre>
<pre> \clearmarking [...] * BESCHRIFTUNG </pre>
<pre> \clip [...,\stackrel{1}{=},...] {...} 1 inherits: \setupazacclipping 2 CONTENT </pre>
<pre> \clippedoverlayimage {...} * FILE </pre>
<pre> \cloneazacamp [...¹] [...²] [...³] [...,⁴,...] 1 NAME 2 NAME 3 NAME 4 NAME </pre>
<pre> \collapsehyphensequences </pre>
<pre> \collect {...} * CONTENT </pre>
<pre> \collectedmath </pre>
<pre> \collectedtext [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {...³} {...⁴} 1 inherits: \setupcollector^{OPT} 2 stil = STYLE BEFEHL culoare = COLOR inherits: \seteazainconjurat 3 TEXT 4 CONTENT </pre>

\collectexpanded {...} * CONTENT
\collectexported
\coloana [...,*,...] * inherits: \columnbreak
\colorcomponents {...} * COLOR
\colored [...,... ¹ ...,...]{... ² } 1 inherits: \definesteculoare 2 CONTENT
\colored [... ¹]{... ² } 1 COLOR 2 CONTENT
\coloronly [... ¹]{... ² } 1 COLOR 2 CONTENT
\columnbreak [...,*,...] * da nu preferinta loca ^{PT} fortat primul ultim NUMMER NAME
\columnsetgridlines {...} * NUMMER
\combinepages [... ¹][...,... ² ...,...] 1 FILE 2 alternativ = a b c orizontal vertical n = NUMMER nx = NUMMER ny = NUMMER start = NUMMER stop = NUMMER distanta = DIMENSION sus = BEFEHL jos = BEFEHL stanga = BEFEHL dreapta = BEFEHL inainte = BEFEHL dupa = BEFEHL intre = BEFEHL frame = on dezactivat fundal = primplan culoare NAME culoarefundal = COLOR
\COMMENT [... ¹][...,... ² ...,...]{... ³ } 1 TEXT 2 inherits: \seteazacommentariu 3 TEXT instances: comment
\comment [... ¹][...,... ² ...,...]{... ³ } 1 TEXT 2 inherits: \seteazacommentariu 3 TEXT
\commalistelement
\commalistprocessor {...} * NAME

\commalistsentence [..., ¹ ...] [..., ² ...] 1 TEXT 2 TEXT
\commalistsize
\COMANDAnamespace
\COMANDAp parameter {...} * KEY
\COMANDAp parameterhash {...} * KEY
\COMANDAs etupmode
\comparagrupculoare [...] * NAME
\comparapaleta [...] * NAME
\comparedimension {.. ¹ .} {.. ² .} 1 DIMENSION 2 DIMENSION
\comparedimensioneps {.. ¹ .} {.. ² .} 1 DIMENSION 2 DIMENSION
\comparetext [...] * NAME
\completeazanumarpagina
\completebtxrendering [..., ¹ ...] [..., ² ...,...] 1 NAME 2 inherits: \setupbtxrendering
\completCOMBINEDLIST [..., [*] ...,...] * inherits: \seteazalistacombinata instances: content
\completcontent [..., [*] ...,...] * inherits: \seteazalistacombinata
\completelist [..., ¹ ...] [..., ² ...,...] 1 LISTE 2 inherits: \seteazalista
\completelistofFLOATS [..., [*] ...,...] * inherits: \seteazalista instances: chemicals figures tables intermezzi graphics
\completelistofchemicals [..., [*] ...,...] * inherits: \seteazalista

```
* inherits: \seteazalista
```

```
* inherits: \seteazalista
```

```
* inherits: \seteazalista
```

```
* inherits: \seteazalista
```

1 NAME

1 SINGULAR

```
* inherits: \seteazasortare
```

```
* inherits: \seteazasortare
```

1 SINGULAR

```
* inherits: \seteazasinonime
```

```
* inherits: \seteazasinonime
```

1 NAME

```
* inherits: \seteazaregistru OPT
```

```
* inherits: \seteazaregistrOPT
```

* CSNAME

* CSNAME

* TEXT CSNAME

\complexorsimple {...} * TEXT CSNAME
\componenta [...] * FILE
\componenta ... * FILE
\composedcollector {...} * NAME
\composedlayer {...} * NAME
\compounddiscretionary
\compresult
\connectboxanchors [... ¹] [... ²] [...,... ³ ...,...] [...,... ⁴ ...,...] {... ⁵ } {... ⁶ } 1 NAME 2 NAME 3 inherits: \setupboxanchorcontent 4 inherits: \setupboxanchorcontent 5 NAME 6 NAME
\connectmatrixanchors [... ¹] [... ²] [...,... ³ ...,...] [...,... ⁴ ...,...] {... ⁵ } {... ⁶ } 1 NAME 2 NAME 3 inherits: \setupboxanchorcontent 4 inherits: \setupboxanchorcontent 5 NAME 6 NAME
\constantdimen *... * CSNAME
\constantdimenargument *... * CSNAME
\constantemptyargument *... * CSNAME
\constantnumber *... * CSNAME
\constantnumberargument *... * CSNAME
\contentreference [..., ¹ ...] [...,... ² ...,...] {... ³ } 1 REFERENCE 2 inherits: \seteazainconjurat 3 CONTENT
\continuednumber {...} * NUMMER
\continueifinputfile {...} * FILE

$\backslash\text{convertargument}$ $\overset{1}{...}$ $\backslash\text{to}$ $\overset{2}{...}$ 1 TEXT 2 CSNAME
$\backslash\text{convertcommand}$ $\overset{1}{...}$ $\backslash\text{to}$ $\overset{2}{...}$ 1 CSNAME 2 CSNAME
$\backslash\text{convertedcounter}$ $[\overset{1}{...}]$ $[..., ... \overset{2}{=} ..., ...]$ 1 NAME 2 inherits: $\backslash\text{setupcounter}$
$\backslash\text{convertedddimen}$ $\{ \overset{1}{...} \}$ $\{ \overset{2}{...} \}$ 1 DIMENSION 2 ex em pt in cm mm sp bp pc dd cc nc
$\backslash\text{convertedsubcounter}$ $[\overset{1}{...}]$ $[\overset{2}{...}]$ $[..., ... \overset{3}{=} ..., ...]$ 1 NAME 2 NUMBER NUMBER:NUMBER NUMBER:* NUMBER:tot 3 inherits: $\backslash\text{setupcounter}$
$\backslash\text{converttestenunar}$ $\{ \overset{1}{...} \}$ $\{ \overset{2}{...} \}$ 1 gol implicit niciunul luna month:mnem character Carac ^{ter} caractere Caractere a A Numere cuv ^{ant} words Cuvant Cuvinte n N numereromane Numereromane i I r R KR RK grec Grec math:greek math:Greek g G abjadnumerals abjadnodotnumerals abjadnaivenumerals hebrewnumerals yiddishnumerals thainumerals devanagarinumerals malayalamnumerals tamilnumerals kannadanumerals telugunumerals bengalinumerals gurmurkhinumerals gujaratinumerals tibetannumerals greeknumerals Greeknumerals arabicnumerals persiannumerals arabicexnumerals arabicdecimals persiandecimals mathgreeknumerals mathGreeknumerals korean ^{numerals} koreanparentnumerals koreancirc ^{lenumerals} kr kr-p kr-c chinesenumerals chinesecapnumerals chineseallnumerals chinesedatenumerals cn cn-c cn-a cn-d sloveniannumerals slovenianNumerals spanishnumerals spanishNumerals russiannumerals russianNumerals mathgreek set ₀ set ₁ set ₂ set ₃ set _{1x} continued zero NAME 2 NUMBER
$\backslash\text{convertmonth}$ $\{ \overset{*}{...} \}$ * NUMBER
$\backslash\text{convertvalue}$ $\overset{1}{...}$ $\backslash\text{to}$ $\overset{2}{...}$ 1 NAME 2 CSNAME
$\backslash\text{convertvboxtohbox}$
$\backslash\text{copiazacamp}$ $[\overset{1}{...}]$ $[\overset{2}{...}]$ 1 NAME 2 NAME
$\backslash\text{copyboxfromcache}$ $\{ \overset{1}{...} \}$ $\{ \overset{2}{...} \}$ $\overset{3}{...}$ 1 NAME 2 NUMMER TEXT 3 CSNAME NUMBER
$\backslash\text{copyLABELtext}$ $[\overset{1}{...}]$ $[..., ... \overset{2}{=} ..., ...]$ 1 SPRACHE 2 KEY = KEY instances: head label mathlabel taglabel unit operator prefix suffix btxlabel
$\backslash\text{copybtxlabeltext}$ $[\overset{1}{...}]$ $[..., ... \overset{2}{=} ..., ...]$ 1 SPRACHE 2 KEY = KEY
$\backslash\text{copyheadtext}$ $[\overset{1}{...}]$ $[..., ... \overset{2}{=} ..., ...]$ 1 SPRACHE 2 KEY = KEY

```

1  ST RACHE
2  KEY  =  KEY

```

```
1  SPRACHE
2  KEY  =  KEY
```

```

1  SPRACHE
2  KEY  =  KEY

```

2 KEY = KEY

2 KEY = KEY

2 KEY = KEY

2 KEY = KEY

```

1  FILE
2  marcaje = on desactivat
   offset  = DIMENSION
   n       = NUMBER
3  inherits: \setuexternalfigure

```

3 KEY

2 NAME

2 NAME

* CONTENT

1	NAME
2	NUMMER

3 CSNAME

```

1      TEXT
2      CSNAME

```

<code>\cramped {...}</code> * CONTENT
<code>\crampedclap {...}</code> * CONTENT
<code>\crampedllap {...}</code> * CONTENT
<code>\crampedrlap {...}</code> * CONTENT
<code>\crlf</code>
<code>\crlfplaceholder</code>
<code>\ctop .¹. {...}</code> 1 TEXT ^{OPT} 2 CONTENT
<code>\ctxcommand {...}</code> * BEFEHL
<code>\ctxdirectcommand {...}</code> * BEFEHL
<code>\ctxdirectlua {...}</code> * BEFEHL
<code>\ctxfunction {...}</code> * NAME
<code>\CTXFUNCTIONDEFINITION</code>
<code>\CTXFUNCTION</code>
<code>\ctxlatecommand {...}</code> * BEFEHL
<code>\ctxlatelua {...}</code> * BEFEHL
<code>\ctxloadluafile {...}</code> * FILE
<code>\ctxlua {...}</code> * BEFEHL
<code>\ctxluabuffer [...]</code> * BUFFER ^{OPT}
<code>\ctxluabuffer {...}</code> * BUFFER
<code>\ctxluacode {...}</code> * BEFEHL

\ctxreport {...} * BEFEHL
\CTXSCANNER
\ctxsprint {...} * BEFEHL
\culoare [...] ¹ {...} ² 1 COLOR 2 CONTENT
\culoaregri [...] ¹ {...} ² 1 COLOR 2 CONTENT
\currentassignmentlistkey
\currentassignmentlistvalue
\currentbtxuservariable {...} * KEY
\currentcommalistitem
\currentCOMANDA
\currentCOMANDAhash
\currentCOMANDAparent
\currentcomponent
\currentenvironment
\currentfeaturetest
\currentinterface
\currentETICHETA [...] ¹ , [...] ² {...} ³ 1 REFERENCE OPT OPT 2 TEXT
\currentlanguage
\currentlistentrydestinationattribute
\currentlistentrylimitedtext {...} * TEXT
\currentlistentrynumber
\currentlistentrypagenumber

\DAYLONG {...} * NUMBER
\DAYSHORT {...} * NUMBER
\d {...} * CHARACTER
\data [..., ¹ ...,...] [..., ² ...,...] 1 d = NUMBER m = NUMBER y = NUMBER 2 an year:NAME y y:NAME yy Y Y:NAME YY luna month:mnem month:hebrew month:jalali m m:mnem m:hebrew m:jalali LUNA MONTH:mnem MONTH:hebrew MONTH:jalali mm M zi day:NAME day:+ day:ord day:++ day:highord d d:NAME d:+ d:ord d:++ d:highord dd dd:+ dd:ord dd:++ dd:highord D D:+ D:ord D:++ D:highord zisaptamana weekday:mnem weekday:hebrew weekday:jalali w w:mnem w:hebrew w:jalali ZISAPTAMANA WEEKDAY:mnem WEEKDAY:hebrew WEEKDAY:jalali W referinta spatiu _ TEXT hebrew:to jalali:to jalali:from
\datacurenta [...*,...] * an year:NAME y y:NAME yy Y Y:NAME YY luna month:mnem month:hebrew month:jalali m m:mnem m:hebrew m:jalali LUNA MONTH:mnem MONTH:hebrew MONTH:jalali mm M zi day:NAME day:+ day:ord day:++ day:highord d d:NAME d:+ d:ord d:++ d:highord dd dd:+ dd:ord dd:++ dd:highord D D:+ D:ord D:++ D:highord zisaptamana weekday:mnem weekday:hebrew weekday:jalali w w:mnem w:hebrew w:jalali ZISAPTAMANA WEEKDAY:mnem WEEKDAY:hebrew WEEKDAY:jalali W referinta spatiu _ TEXT hebrew:to jalali:to jalali:from
\datacurenta [...] * NAME
\datasetentry {...} * KEY realpage
\datasetindex
\datasetsize [... ¹] {... ² } 1 FILE 2 NAME
\datasetvariable [... ¹] {... ² } {... ³ } {... ⁴ } 1 FILE 2 NAME 3 NAME NUMBER 4 KEY realpage
\data [..., ¹ ...,...] [... ²] 1 d = NUMBER m = NUMBER y = NUMBER 2 NAME
\data [..., ¹ ...,...] [..., ² ...,...] 1 an year:NAME y y:NAME yy Y Y:NAME YY luna month:mnem month:hebrew month:jalali m m:mnem m:hebrew m:jalali LUNA MONTH:mnem MONTH:hebrew MONTH:jalali mm M zi day:NAME day:+ day:ord day:++ day:highord d d:NAME d:+ d:ord d:++ d:highord dd dd:+ dd:ord dd:++ dd:highord D D:+ D:ord D:++ D:highord zisaptamana weekday:mnem weekday:hebrew weekday:jalali w w:mnem w:hebrew w:jalali ZISAPTAMANA WEEKDAY:mnem WEEKDAY:hebrew WEEKDAY:jalali W referinta spatiu _ TEXT hebrew:to jalali:to jalali:from 2 d = NUMBER m = NUMBER y = NUMBER
\data [... ¹] [..., ² ...,...] 1 NAME 2 d = NUMBER m = NUMBER y = NUMBER

\daylong {...} * NUMBER
\dayoftheweek {...} {...} {...} 1 NUMBER 2 NUMBER 3 NUMBER
\dayshort {...} * NUMBER
\dayspermonth {...} {...} 1 NUMBER 2 NUMBER
\decrement *.. * CSNAME
\decrementcounter [...] 1 NAME 2 NUMBER
\decrementedcounter [...] * NAME
\decrementpagenumber
\decrementsubpagenumber
\decrementvalue {...} * NAME
\decrement (...,*,...) * CSNAME NUMBER
\defaultinterface
\defaultobjectpage
\defaultobjectreference
\defcatcodecommand \... ... {...} 1 CSNAME 2 CHARACTER NUMBER 3 BEFEHL
\defconvertedargument \... {...} 1 CSNAME 2 TEXT
\defconvertedcommand \... *.. 1 CSNAME 2 CSNAME
\defconvertedvalue \... {...} 1 CSNAME 2 NAME

<pre> \defineactivecharacter ¹... {²...} 1 CHARACTER 2 BEFEHL </pre>
<pre> \defineadaptive [¹...] [²...] [³...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupadaptive </pre>
<pre> \definealign [¹] [...²,...] 1 NAME 2 inherits: \seteazaalinierea </pre>
<pre> \definealternativestyle [...¹,...] [²...] [³] 1 NAME 2 BEFEHL 3 BEFEHL </pre>
<pre> \defineanchor [¹] [²] [...³...,...³...] [...⁴...,...⁴...] 1 NAME 2 NAME 3 inherits: \setupplayer 4 inherits: \setupplayerinherits: \seteazainconjurat </pre>
<pre> \defineanchorbox [[*]...] * NAME </pre>
<pre> \defineanchorboxoverlay [[*]...] * NAME </pre>
<pre> \defineattachment [¹] [²] [...³...,...³...] 1 NAME 2 NAME 3 inherits: \setupattachment </pre>
<pre> \defineattribute [¹] [...²,...] 1 NAME 2 local global public private pickup </pre>
<pre> \definebackground [¹] [²] [...³...,...³...] 1 NAME 2 NAME 3 inherits: \seteazafundal </pre>
<pre> \definebalancing [¹] [²] [...³...,...³...] 1 NAME 2 NAME 3 inherits: \setupbalancing </pre>
<pre> \definebar [¹] [²] [...³...,...³...] 1 NAME 2 NAME 3 inherits: \setupbar </pre>
<pre> \definebleeding {¹...} {²...} [...³...,...³...] 1 NAME 2 NAME 3 inherits: \setupbleeding </pre>
<pre> \definebodyfontswitch [¹] [...²,...] 1 NAME 2 inherits: \seteazafonttext </pre>

<pre> \defineboundary [.¹.] [.².] 1 NAME OPT 2 public </pre>
<pre> \defineboxanchor [.*.] * NAME </pre>
<pre> \defineboxanchorcontent [.¹.] [.,..².,..] 1 NAME OPT 2 inherits: \setupboxanchorcontent </pre>
<pre> \definebreakpoint [.¹.] [.².] [.,..³.,..] 1 NAME OPT 2 CHARACTER 3 type = 1 2 3 4 5 nstanga = NUMMER ndreapta = NUMMER stanga = BEFEHL mijloc = BEFEHL dreapta = BEFEHL range = da nu language = SPRACHE </pre>
<pre> \definebreakpoints [.*.] * NAME </pre>
<pre> \definebtx [.¹.] [.².] [.,..³.,..] 1 NAME OPT OPT 2 NAME 3 inherits: \setupbtx </pre>
<pre> \definebtxdataset [.¹.] [.².] [.,..³.,..] 1 NAME OPT OPT 2 NAME 3 inherits: \setupbtxdataset </pre>
<pre> \definebtxregister [.¹.] [.².] [.,..³.,..] 1 NAME OPT OPT 2 NAME 3 inherits: \setupbtxregister </pre>
<pre> \definebtxrendering [.¹.] [.².] [.,..³.,..] 1 NAME OPT OPT 2 NAME 3 inherits: \setupbtxrendering </pre>
<pre> \definebutton [.¹.] [.².] [.,..³.,..] 1 NAME OPT OPT 2 NAME 3 inherits: \setupbutton </pre>
<pre> \definecapitals [.¹.] [.².] [.,..³.,..] 1 NAME OPT OPT 2 NAME 3 inherits: \seteazamajuscule </pre>
<pre> \definecharacterkerning [.¹.] [.².] [.,..³.,..] 1 NAME OPT OPT 2 NAME 3 inherits: \setupcharacterkerning </pre>
<pre> \definecharacterspacing [.¹.] [.².] 1 NAME OPT 2 NAME </pre>

<pre> \definechemical [¹...] {²...} 1 NAME 2 CONTENT </pre>
<pre> \definechemicals [¹...] [²...] [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupchemical </pre>
<pre> \definechemicalsymbol [¹...] [²...] 1 NAME 2 TEXT </pre>
<pre> \definechemistry [¹...] [²...] [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupchemistry </pre>
<pre> \definecollector [¹...] [²...] [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupcollector </pre>
<pre> \definecolumnbreak [¹...] [...,²...] 1 NAME 2 da nu preferinta local fortat primul ultim NUMBER </pre>
<pre> \definecolumnset [¹...] [²...] [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupcolumnset </pre>
<pre> \definecolumnsetarea [¹...] [²...] [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupcolumnsetarea </pre>
<pre> \definecolumnsetspan [¹...] [²...] [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupcolumnsetspan </pre>
<pre> \definecombination [¹...] [²...] [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupcombination </pre>
<pre> \definecomment [¹...] [²...] [...,³...,...] 1 NAME 2 NAME 3 inherits: \seteazacommentariu </pre>
<pre> \definecomparingtext [¹...] [²...] [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupcomparingtext </pre>
<pre> \definecomplexorsimple *... * CSNAME </pre>
<pre> \definecomplexorsimpleempty *... * CSNAME </pre>

<pre> \definecomplexorsimpleempty {...} * TEXT CSNAME </pre>
<pre> \definecomplexorsimple {...} * TEXT CSNAME </pre>
<pre> \defineconversionset [...]¹ [...,²...] [...]³ 1 NAME SECTIONBLOCK:NAME 2 NAME PROCESSOR->NAME 3 NAME PROCESSOR->NAME </pre>
<pre> \definecounter [...]¹ [...]² [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupcounter </pre>
<pre> \definedataset [...]¹ [...]² [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupdataset </pre>
<pre> \definedate [...]¹ [...,²...] 1 NAME 2 an year:NAME y y:NAME yy Y Y:NAME YY luna month:mnem month:hebrew month:jalali m m:mnem m:hebrew m:jalali LUNA MONTH:mnem MONTH:hebrew MONTH:jalali mm M zi day:NAME day:+ day:ord day:++ day:highord d d:NAME d:+ d:ord d:++ d:highord dd dd:+ dd:ord dd:++ dd:highord D D:+ D:ord D:++ D:highord zisaptamana weekday:mnem weekday:hebrew weekday:jalali w w:mnem w:hebrew w:jalali ZISAPTAMANA WEEKDAY:mnem WEEKDAY:hebrew WEEKDAY:jalali W referinta spatiu _ TEXT hebrew:to jalali:to jalali:from </pre>
<pre> \definedelimitedtext [...]¹ [...]² [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupdelimitedtext </pre>
<pre> \definedfont [...]¹ * FONT </pre>
<pre> \definedocument [...]¹ [...]² [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupdocument </pre>
<pre> \defineeffect [...]¹ [...]² [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupeffect </pre>
<pre> \defineexpandable [...]¹ \...² {...}³ 1 NUMMER 2 CSNAME 3 CONTENT </pre>
<pre> \defineexpansion [...]¹ [...]² [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupeexpansion </pre>
<pre> \defineextensiblefiller [...]¹ [...]² 1 NAME 2 NUMMER </pre>

`\defineexternalfigure` [¹...] [²...] [...,³...,...]

1 NAME
2 NAME
3 inherits: \setupexternalfigure

`\definefacingfloat` [¹...] [²...] [...,³...,...]

1 NAME
2 NAME
3 inherits: \setupfacingfloat

`\definefallbackfamily` [¹...] [²...] [³...] [...,⁴...,...]

1 NAME
2 rm ss tt mm hw cg roman serif regular sansserif sans suport teletype type mono scrismannual caligrafic math matematica
3 FONT
4 rscale = NUMBER
designsize = implicit auto
goodies = FILE
range = NUMBER NAME
offset = NUMBER NAME
check = da nu
fortat = da nu
features = NAME
tf = TEXT
bf = TEXT
it = TEXT
sl = TEXT
bi = TEXT
bs = TEXT
sc = TEXT

`\definefallbackfamily` [¹...] [²...] [³...] [...,⁴...,...]

1 NAME
2 rm ss tt mm hw cg roman serif regular sansserif sans suport teletype type mono scrismannual caligrafic math matematica
3 FONT
4 NAME

`\definefieldbody` [¹...] [²...] [...,³...,...]

1 NAME
2 NAME
3 inherits: \setupfieldbody

`\definefieldbodyset` [¹...] [...,²...,...]

1 NAME
2 NAME

`\definefieldcategory` [¹...] [²...] [...,³...,...]

1 NAME
2 NAME
3 inherits: \setupfieldcategory

`\definefileconstant` {¹...} {²...}

1 NAME
2 NAME

`\definefilefallback` [¹...] [...,²...,...]

1 NAME
2 FILE

`\definefilesynonym` [¹...] [²...]

1 NAME
2 FILE

`\definefiller` [¹...] [²...] [...,³...,...]

1 NAME
2 NAME
3 inherits: \setupfiller

```

\definefirstline  [...1]  [...2]  [...,3...,...]
1  NAME
2  NAME
3  inherits: \setupfirstline

```

```

\definefittingpage  [...1]  [...2]  [...,3...,...]
1  NAME
2  NAME
3  inherits: \setupfittingpage

```

```

\definefontalternative  [...*]
*  NAME

```

```

\definefontfallback  [...1]  [...2]  [...,3...,]  [...,4...,...]
1  NAME
2  FONT NAME
3  NAME NUMBER
4  rscale      =  NUMBER
   fortat      =  da nu
   check       =  da nu
   offset      =  NUMBER NAME
   target      =  NUMBER NAME
   features    =  NAME
   factor      =  NUMBER
   metoda      =  lowercase uppercase

```

```

\definefontfamily  [...1]  [...2]  [...3]  [...,4...,...]
1  NAME
2  rm ss tt mm hw cg roman serif regular sansserif sans suport teletype type mono scrismmanual caligrafic math matematica
3  FONT
4  rscale      =  NUMBER
   designsize  =  implicit auto
   goodies     =  FILE
   features    =  NAME
   tf          =  TEXT
   bf          =  TEXT
   it          =  TEXT
   sl          =  TEXT
   bi          =  TEXT
   bs          =  TEXT
   sc          =  TEXT

```

```

\definefontfamilypreset  [...1]  [...,2...,...]
1  NAME
2  inherits: \definefontfamily

```

```

\definefontfamilypreset  [...1]  [...2]
1  NAME
2  NAME

```

```

\definefontfamily  [...1]  [...2]  [...3]  [...,4...,]
1  NAME
2  rm ss tt mm hw cg roman serif regular sansserif sans suport teletype type mono scrismmanual caligrafic math matematica
3  FONT
4  NAME

```

```

\definefontfeature  [...1]  [...2]  [...,3...,...]
1  NAME
2  NAME
3  language      = NAME
    script       = NAME auto
    mode         = node base auto niciunul
    liga         = da nu
    kern         = da nu
    extrakerns   = da nu
    tlig         = da nu
    trep         = da nu
    missing      = da nu
    dummies      = da nu
    analyze      = da nu
    unicoding    = da nu
    expansiune   = NAME
    protrusion   = NAME
    nostackmath  = da nu
    realdimensions = da nu
    itlc         = da nu
    textitalics  = da nu
    mathitalics  = da nu
    slant        = NUMMER
    extend       = NUMMER
    dimensions   = NUMMER strut
    boundingbox  = da nu fundal incadrat gol COLOR
    compose     = da nu
    char-ligatures = da nu
    compat-ligatures = da nu
    goodies      = FILE
    extrafeatures = da nu
    featureset   = NAME
    colorscheme  = NAME
    postprocessor = NAME
    mathdimensions = NAME
    keepligatures = da nu auto
    devanagari   = da nu
    features     = da nu
    tcom         = da nu
    anum        = da nu
    mathsize     = da nu
    decomposehangul = da nu
    mathalternatives = da nu
    mathgaps     = da nu
    checkmarks   = da nu
    uppercasing  = da nu
    lowercasing  = da nu
    mathnolimitsmode = NUMMER
    blockligatures = da nu
    metapost     = NAME
    NAME        = da nu

```

```

\definefontfile  [...1]  [...2]  [...,3...,...]
1  NAME
2  FILE
3  features      = NAME
    fallbacks    = NAME
    goodies      = NAME
    designsize   = auto implicit

```

```

\definefontscriptset  [...1]  [...,2,...]
1  NAME
2  NAME

```

```

\definefontsize  [...*]
*  NAME

```

```

\definefontsolution  [...1]  [...2]  [...,3...,...]
1  NAME
2  NAME
3  inherits: \setupfontsolution

```

$\backslash\text{defineformula}$ $[^1\ldots]$ $[^2\ldots]$ $[^3\ldots,\ldots,\ldots]$ 1 NAME 2 NAME 3 inherits: \seteazaformule
$\backslash\text{defineformulaalternative}$ $[^1\ldots]$ $[^2\ldots]$ $[^3\ldots]$ 1 NAME 2 CSNAME 3 CSNAME
$\backslash\text{defineformulaframed}$ $[^1\ldots]$ $[^2\ldots]$ $[^3\ldots,\ldots,\ldots]$ 1 NAME 2 NAME 3 inherits: \setupformulaframed
$\backslash\text{defineframedcontent}$ $[^1\ldots]$ $[^2\ldots]$ $[^3\ldots,\ldots,\ldots]$ 1 NAME 2 NAME 3 inherits: \setupframedcontent
$\backslash\text{defineframedmath}$ $[^1\ldots]$ $[^2\ldots]$ $[^3\ldots,\ldots,\ldots]$ 1 NAME 2 NAME 3 inherits: \seteazainconjurat
$\backslash\text{defineframedtable}$ $[^1\ldots]$ $[^2\ldots]$ 1 NAME 2 NAME
$\backslash\text{definefrozenfont}$ $[^1\ldots]$ $[^2\ldots]$ 1 NAME 2 FONT
$\backslash\text{defineglobalcolor}$ $[^1\ldots]$ $[^2\ldots,\ldots,\ldots]$ 1 NAME 2 inherits: \definesteculoare
$\backslash\text{defineglobalcolor}$ $[^1\ldots]$ $[^2\ldots]$ 1 NAME 2 COLOR
$\backslash\text{definegraphicstypesynonym}$ $[^1\ldots]$ $[^2\ldots]$ 1 NAME 2 NAME
$\backslash\text{definegridsnapping}$ $[^1\ldots]$ $[^2\ldots,\ldots]$ 1 NAME 2 local global noheight nodepth box max min niciunul linie jumatatelinie primul ultim inaltime minima maxheight mindepth maxdepth sus subsol strut NUMMER minheight:NUMMER maxheight:NUMMER mindepth:NUMMER maxdepth:NUMMER box:NUMMER top:NUMMER bottom:NUMMER offset:NUMMER
$\backslash\text{defineheadalternative}$ $[^1\ldots]$ $[^2\ldots]$ $[^3\ldots,\ldots,\ldots]$ 1 NAME 2 NAME 3 inherits: \setupheadalternative
$\backslash\text{definehelp}$ $[^1\ldots]$ $[^2\ldots]$ $[^3\ldots,\ldots,\ldots]$ 1 NAME 2 NAME 3 inherits: \setuphelp

<pre> \definehigh [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuphigh </pre>
<pre> \definehighlight [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuphighlight </pre>
<pre> \definehorizontalbox [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuphorizontalbox </pre>
<pre> \definehspace [...]¹ [...]² [...]³ 1 NAME 2 NAME 3 DIMENSION </pre>
<pre> \definehyphenationfeatures [...]¹ [...,...²...,...] 1 NAME 2 characters = TEXT hyphens = da tot TEXT joiners = da tot TEXT rightwords = NUMMER hyphenmin = NUMMER lefthyphenmin = NUMMER righthyphenmin = NUMMER lefthyphenchar = NUMMER righthyphenchar = NUMMER alternativ = original tex hyphenate expanded traditional niciunul borduradreapta = tex rightchars = cuvant NUMMER </pre>
<pre> \defineindentedtext [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupindentedtext </pre>
<pre> \defineindenting [...]¹ [...,²...] 1 NAME 2 [-+]mic [-+]mediu [-+]mare niciunul nu nu primul urmatorul da totdeauna niciodata impar par normal reset toggle DIMENSION </pre>
<pre> \defineinitial [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupinitial </pre>
<pre> \defineinsertion [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupinsertion </pre>
<pre> \defineinteraction [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \seteazainteractiunea </pre>
<pre> \defineinteractionbar [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \seteazabarainteractiune </pre>

<pre> \defineinterfaceconstant {...} {...} 1 NAME 2 NAME </pre>
<pre> \defineinterfaceelement {...} {...} 1 NAME 2 NAME </pre>
<pre> \defineinterfacevariable {...} {...} 1 NAME 2 NAME </pre>
<pre> \defineinterlinespace [...¹] [...²] [...,...³...,...] 1 NAME OPT OPT 2 NAME 3 inherits: \seteazaspatiuinterliniar </pre>
<pre> \defineintermediatecolor [...¹] [...,...²...] [...,...³...,...] 1 NAME OPT OPT 2 COLOR NUMMER 3 a = NUMMER t = NUMMER </pre>
<pre> \defineitemgroup [...¹] [...²] [...,...³...,...] 1 NAME OPT OPT 2 NAME 3 inherits: \setupitemgroup </pre>
<pre> \defineitems [...¹] [...²] [...,...³...,...] 1 NAME OPT OPT 2 NAME 3 inherits: \seteazaelemente </pre>
<pre> \definelabcolor [...¹] [...,...²...,...] 1 NAME 2 l = NUMMER a = NUMMER niciunul normal multiply ecran overlay softlight hardlight colordodge colorburn darken lighten difference exclusion hue saturation culoare luminosity b = NUMMER c = NUMMER h = NUMMER t = NUMMER x = NUMMER y = NUMMER z = NUMMER s = NUMMER </pre>
<pre> \definelabcolor [...¹] [...²] 1 NAME 2 COLOR </pre>
<pre> \definelabelclass [...¹] [...²] 1 NAME OPT 2 NUMMER </pre>
<pre> \definelayer [...¹] [...²] [...,...³...,...] 1 NAME OPT OPT 2 NAME 3 inherits: \setuplayer </pre>
<pre> \definelayerpreset [...¹] [...,...²...,...] 1 NAME 2 inherits: \setuplayer </pre>

<pre> \definelayerpreset [¹...] [²...] 1 NAME 2 NAME </pre>
<pre> \definelayout [¹...] [²...] [³...,...³...,...] 1 NAME 2 NAME 3 inherits: \seteazaaspect </pre>
<pre> \definelinefiller [¹...] [²...] [³...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuplinefiller </pre>
<pre> \definelinenote [¹...] [²...] [³...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuplinenote </pre>
<pre> \definelinenumbering [¹...] [²...] [³...,...³...,...] 1 NAME 2 NAME 3 inherits: \seteazanumerotarelinii </pre>
<pre> \definelineprofile [¹...] [²...] [³...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuplineprofile </pre>
<pre> \definelines [¹...] [²...] [³...,...³...,...] 1 NAME 2 NAME 3 inherits: \seteazalinii </pre>
<pre> \definelistalternative [¹...] [²...] [³...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuplistalternative </pre>
<pre> \definelistextra [¹...] [²...] [³...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuplistextra </pre>
<pre> \definelocalboxes [¹...] [²...] [³...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuplocalboxes </pre>
<pre> \definelow [¹...] [²...] [³...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuplow </pre>
<pre> \definelowhigh [¹...] [²...] [³...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuplowhigh </pre>
<pre> \definelowmidhigh [¹...] [²...] [³...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuplowmidhigh </pre>

```
\defineMPinstance    [1...] [2...] [3...=...,...]
1  NAME
2  NAME
3  inherits: \setupMPinstance
```

```
\definemarginblock    [1...] [2...] [3...=...,...]
1  NAME
2  NAME
3  inherits: \setupmarginblock
```

```
\definemargindata    [1...] [2...] [3...=...,...]
1  NAME
2  NAME
3  inherits: \setupmargindata
```

```
\definemarkers    [...]
*  NAME
```

```
\definemathaccent    [1...] [2...] [3...=...,...]
1  NAME
2  NAME
3  inherits: \setupmathaccent
```

```
\definemathalignment    [1...] [2...] [3...=...,...]
1  NAME
2  NAME
3  inherits: \setupmathalignment
```

```
\definemathannotation    [1...] [2...] [3...=...,...]
1  NAME
2  NAME
3  inherits: \setupmathannotation
```

```
\definemathbottomaccent    [1...] [2...] [3...]
1  subsol bottom:stretch NAME
2  NAME
3  NUMBER
```

```
\definemathcases    [1...] [2...] [3...=...,...]
1  NAME
2  NAME
3  inherits: \setupmathcases
```

```
\definemathcommand    [1...] [2...] {3...}
1  NAME
2  tot begin end unset ordinary operator binary relation open close punctuation variable active intern under over
fraction radical centru prime accent fenced ghost vcenter explicit imaginary differential exponential integral
ellipsis function digit division factorial wrapped construct dimension unary textpunctuation unspaced experimental
fake numbergroup continuation
3  BEFEHL
```

```
\definemathcommand    [1...] [2...] [3...] {4...}
1  NAME
2  tot begin end unset ordinary operator binary relation open close punctuation variable active intern under over
fraction radical centru prime accent fenced ghost vcenter explicit imaginary differential exponential integral
ellipsis function digit division factorial wrapped construct dimension unary textpunctuation unspaced experimental
fake numbergroup continuation
3  tot begin end unset ordinary operator binary relation open close punctuation variable active intern under over
fraction radical centru prime accent fenced ghost vcenter explicit imaginary differential exponential integral
ellipsis function digit division factorial wrapped construct dimension unary textpunctuation unspaced experimental
fake numbergroup continuation
4  BEFEHL
```

```

\definemathcommand [...] [...] [...] [...]
1 NAME
2 tot begin end unset ordinary operator binary relation open close punctuation variable active intern under over
fraction radical centru prime accent fenced ghost vcenter explicit imaginary differential exponential integral
ellipsis function digit division factorial wrapped construct dimension unary textpunctuation unspaced experimental
fake numbergroup continuation
3 unu
4 \...#1

```

```

\definemathcommand [...] [...] [...] [...]
1 NAME
2 tot begin end unset ordinary operator binary relation open close punctuation variable active intern under over
fraction radical centru prime accent fenced ghost vcenter explicit imaginary differential exponential integral
ellipsis function digit division factorial wrapped construct dimension unary textpunctuation unspaced experimental
fake numbergroup continuation
3 doi
4 \...#1#2

```

```

\definemathconstant [...] [...]
1 NAME
2 CHARACTER

```

```

\definemathdelimited [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupmathdelimited

```

```

\definemathdelimiter [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupmathdelimiters

```

```

\definemathdouble [...] [...] [...] [...] [...]
1 ambele vfenced NAME
2 inherits: \setupmathstackers
3 NAME
4 NUMMER
5 NUMMER

```

```

\definemathdoubleaccent [...] [...] [...] [...]
1 ambele both:stretch NAME
2 NAME
3 NUMMER
4 NUMMER

```

```

\definemathdoubleextensible [...] [...] [...] [...]
1 ambele vfenced
2 NAME
3 NUMMER
4 NUMMER

```

```

\definematematics [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupmathematics

```

```

\definemathextensible [...] [...] [...]
1 reverse matematica text chemistry
2 NAME
3 NUMMER

```

```

\definemathfence [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupmathfences

```

<pre> \definemathfraction [¹...] [²...] [³...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupmathfraction </pre>
<pre> \definemathframed [¹...] [²...] [³...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupmathframed </pre>
<pre> \definemathfunction [¹...] [²...] [³...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupmathfunctions </pre>
<pre> \definemathgroupset [¹...] [²...] 1 NAME 2 every implicit binary_␣relation binary_␣set_␣relation integral limit number_␣set postfix_␣operator prime binary_␣operator binary_␣vector binary_␣arithmetic binary_␣logical binary_␣set constant arithmetic constant_␣set differential differential2 factorial interval quantifier unary_␣set constant_␣logical partial nary_␣operator nary_␣logical specifier specifier2 pause punctuation unary_␣logical whatever whatever2 </pre>
<pre> \definemathmatrix [¹...] [²...] [³...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupmathmatrix </pre>
<pre> \definemathnesting [¹...] [²...] [³...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupmathnesting </pre>
<pre> \definemathoperator [¹...] [²...] [³...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupmathoperators </pre>
<pre> \definemathornament [¹...] [²...] [³...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupmathornament </pre>
<pre> \definemathover [¹...] [²...] [³...] 1 sus vfenced NAME 2 NAME 3 NUMMER </pre>
<pre> \definemathoverextensible [¹...] [²...] [³...] 1 sus vfenced 2 NAME 3 NUMMER </pre>
<pre> \definemathovertextextensible [¹...] [²...] [³...] 1 bothtext 2 NAME 3 NUMMER </pre>

```

\definemathpreset    [...]1    [...]2...
1  NAME
2  factor    =  NUMBER
    stil     =  tot display text script scriptscript crampeddisplay crampedtext crampedscript crampedscriptscript
    lista    =  quad exheight axis accentbaseheight accentbasedepth flattenedaccentbaseheight flattenedaccentbasedepth
                  xscale yscale operatorsize overbarkern overbarrule overbarvgap underbarkern underbarrule underbarvgap
                  radicalkern radicalrule radicalvgap radicaldegreebefore radicaldegreeafter radicaldegreeraise radicalextensibleafter
                  radicalextensiblebefore stackvgap stacknumup stackdenomdown fractionrule fractionnumvgap fractionnumup
                  fractiondenomvgap fractiondenomdown fractiondelsize skewedfractionhgap skewedfractionvgap limitabovevgap
                  limitabovekern limitbelowvgap limitbelowbgap limitbelowkern nolimitsubfactor nolimitsupfactor
                  underdelimitervgap underdelimiterbgap overdelimitervgap overdelimiterbgap subshiftdrop supshiftdrop
                  subshiftdown subsupshiftdown subtopmax supshiftdown subbottommin supsubbottommax subsupvgap spacebeforescript
                  spacebetweenascript connectoroverlapmin superscriptsnap subscriptsnap extrasuperscriptshift
                  extrasubscriptshift extrasuperprescriptshift extrasubprescriptshift primeraise primeraisecomposed
                  primeshiftup primeshiftup primespaceafter ruleheight ruledepth extrasuperscriptspace extrasubscriptspace
                  extrasuperprescriptspace extrasubprescriptspace skeweddelimitertolerance accenttopshiftup accentbottomshiftdown
                  accenttopovershoot accentbottomovershoot accentsuperscriptdrop accentsuperscriptpercent accentextendmargin
                  flattenedaccenttopshiftup flattenedaccentbottomshiftdown delimiterpercent delimitershortfall delimiterextendmargin
                  overlinevariant underlinevariant overdelimitervariant underdelimitervariant delimiterovervariant
                  delimiterundervariant hextensiblevariant vextensiblevariant fractionvariant radicalvariant accentvariant
                  degreevariant topaccentvariant bottomaccentvariant overlayaccentvariant numeratorvariant denominatorvariant
                  superscriptvariant subscriptvariant primevariant stackvariant

    unite    =  axis

```

```

\definemathradical    [...]1    [...]2    [...]3...,...]
1  NAME
2  NAME
3  inherits: \setupmathradical

```

```

\definemathsimplealign    [...]1    [...]2    [...]3...,...]
1  NAME
2  NAME
3  inherits: \setupmathsimplealign

```

```

\definemathspacing    [...]1    [...]2    [...]3
1  NAME
2  orizontal vertical NUMBER
3  NUMBER

```

```

\definemathstackers    [...]1    [...]2    [...]3...,...]
1  NAME
2  NAME
3  inherits: \setupmathstackers

```

```

\definemathstyle    [...]1    [...]2...,...]
1  NAME
2  display text script scriptscript cramped uncramped normal impachetat mic mare

```

```

\definemathsymbol    [...]1    [...]2    [...]3
1  NAME
2  tot begin end unset ordinary operator binary relation open close punctuation variable active intern under over
    fraction radical centru prime accent fenced ghost vcenter explicit imaginary differential exponential integral
    ellipsis function digit division factorial wrapped construct dimension unary textpunctuation unspaced experimental
    fake numbergroup continuation
3  NUMBER

```

```

\definemathtext    [...]1    [...]2    [...]3...,...]
1  NAME
2  NAME
3  inherits: \setupmathtext

```

```

\definemathtopaccent    [...]1    [...]2    [...]3
1  sus top:stretch top:dot NAMEOPT
2  NAME
3  NUMBER

```

<pre> \definemathtoysymbol [...¹.] [...².] [...³.] 1 NAME 2 tot begin end unset ordinary operator binary relation open close punctuation variable active intern under over fraction radical centru prime accent fenced ghost vcenter explicit imaginary differential exponential integral ellipsis function digit division factorial wrapped construct dimension unary textpunctuation unspaced experimental fake numbergroup continuation 3 CHARACTER </pre>
<pre> \definemathtriplet [...¹.] [...².] [...³.] 1 NAME 2 NAME 3 TEXT </pre>
<pre> \definemathunder [...¹.] [...².] [...³.] 1 subsol vfenced NAME 2 NAME 3 NUMMER </pre>
<pre> \definemathunderextensible [...¹.] [...².] [...³.] 1 subsol vfenced 2 NAME 3 NUMMER </pre>
<pre> \definemathundertextextensible [...¹.] [...².] [...³.] 1 bothtext 2 NAME 3 NUMMER </pre>
<pre> \definemathunstacked [...¹.] [...².] [...³.] 1 larg 2 NAME 3 NUMMER </pre>
<pre> \definemeasure [...¹.] [...².] 1 NAME 2 DIMENSION </pre>
<pre> \definemessageconstant {...*} * NAME </pre>
<pre> \definemixedcolumns [...¹.] [...².] [...³...,...] 1 NAME 2 NAME 3 inherits: \setupmixedcolumns </pre>
<pre> \definemode [...¹...,...] [...².] 1 NAME 2 da nu mentine </pre>
<pre> \definemulticolumns [...¹.] [...².] [...³...,...] 1 NAME 2 NAME 3 inherits: \setupmulticolumns </pre>
<pre> \definemultitonecolor [...¹.] [...²...,...] [...³...,...] [...⁴...,...] 1 NAME 2 COLOR = NUMMER 3 inherits: \definesteculoare 4 inherits: \definespotcolor </pre>
<pre> \definenamecolor [...¹.] [...²...,...] 1 NAME 2 inherits: \definesteculoare </pre>

<pre> \definenamecolor [...]¹ [...]² 1 NAME 2 COLOR </pre>
<pre> \definenamespace [...]¹ [...,²...,...] 1 NAME 2 nume = TEXT parent = TEXT stil = da nu comanda = da nu lista setup = da nu lista set = da nu lista frame = da nu </pre>
<pre> \definennarrower [...]¹ [...]² [...,³...,...] 1 NAME 2 NAME 3 inherits: \seteazaingust </pre>
<pre> \definernote [...]¹ [...]² [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupnote </pre>
<pre> \defineoptimize [...]¹ [...]² [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupoptimize </pre>
<pre> \defineorientation [...]¹ [...]² [...,³...,...] 1 NAME 2 NAME 3 inherits: \setuporientation </pre>
<pre> \defineornament [...]¹ [...,²...,...] [...,³...,...] 1 NAME 2 alternativ = a b inherits: \setupcollector 3 stil = STYLE BEFEHL culoare = COLOR inherits: \seteazainconjurat </pre>
<pre> \defineornament [...]¹ [...,²...,...] [...,³...,...] 1 NAME 2 alternativ = a b inherits: \setupplayer 3 inherits: \setuplayeredtext </pre>
<pre> \defineoutputroutine [...]¹ [...]² [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupoutputroutine </pre>
<pre> \defineoutputroutinecommand [...]*[...] * KEY </pre>
<pre> \definepage [...]¹ [...]² 1 NAME 2 REFERENCE </pre>
<pre> \definepagebreak [...]¹ [...,²...] 1 NAME 2 gol antet subsol dummy incadrat NUMMER +NUMMER implicit reset dezactivat da nu marcaj blank preferinta preferintamare stanga dreapta par impar cvadрупul ultim ultimpagina start stop xy note </pre>

<pre> \definepagechecker [...¹] [...²] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuppagechecker </pre>
<pre> \definepagecolumns [...¹] [...²] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuppagecolumns </pre>
<pre> \definepageinjection [...¹] [...²] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuppageinjection </pre>
<pre> \definepageinjectionalternative [...¹] [...²] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuppageinjectionalternative </pre>
<pre> \definepageshift [...¹] [...²] [...,...³...] 1 NAME 2 orizontal vertical 3 DIMENSION </pre>
<pre> \definepagestate [...¹] [...²] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuppagestate </pre>
<pre> \definepairedbox [...¹] [...²] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuppairedbox </pre>
<pre> \defineparagraph [...¹] [...²] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupparagraph </pre>
<pre> \defineparallel [...¹] [...,...²...] 1 NAME 2 NAME </pre>
<pre> \defineparbuilder [...*] * NAME </pre>
<pre> \defineparinsert [...¹] [...²] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupparinsert </pre>
<pre> \defineperiodkerning [...¹] [...²] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupperiodkerning </pre>
<pre> \defineplaceholder [...¹] [...²] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupplaceholder </pre>

<pre> \defineplacement [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupplacement </pre>
<pre> \definepositioning [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setarepozitie </pre>
<pre> \defineprefixset [...]¹ [...,²...] [...]³ 1 NAME SECTIONBLOCK:NAME 2 ABSCHNITT 3 ABSCHNITT </pre>
<pre> \defineprocesscolor [...]¹ [...]² [...,...³...,...] 1 NAME 2 COLOR 3 inherits: \definesteculoare </pre>
<pre> \defineprocessor [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupprocessor </pre>
<pre> \definepushbutton [...]¹ [...,...²...,...] 1 NAME 2 inherits: \setupfieldcontentframed </pre>
<pre> \definepushsymbol [...]¹ [...]² 1 NAME 2 n r d </pre>
<pre> \definerenderingwindow [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuprenderingwindow </pre>
<pre> \defineresetset [...]¹ [...,²...] [...]³ 1 NAME SECTIONBLOCK:NAME 2 NUMMER 3 NUMMER </pre>
<pre> \defineruby [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupruby </pre>
<pre> \definesavebuffer [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupsavebuffer </pre>
<pre> \definescale [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupscale </pre>
<pre> \definescript [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupscript </pre>

<pre> \definesectionlevels [...]¹ [...,²...] 1 NAME 2 ABSCHNITT </pre>
<pre> \defineselector [...]¹ [...,²...^{OPT},...] 1 NAME 2 inherits: \setupselector </pre>
<pre> \defineseparatorset [...]¹ [...,²...] [...]³^{OPT} 1 NAME SECTIONBLOCK:NAME 2 BEFEHL PROCESSOR->BEFEHL 3 BEFEHL PROCESSOR->BEFEHL </pre>
<pre> \defineshadow [...]¹ [...]²^{OPT} [...,³...^{OPT},...] 1 NAME 2 NAME 3 inherits: \setupshadow </pre>
<pre> \defineshift [...]¹ [...]²^{OPT} [...,³...^{OPT},...] 1 NAME 2 NAME 3 inherits: \setupshift </pre>
<pre> \definesidebar [...]¹ [...]²^{OPT} [...,³...^{OPT},...] 1 NAME 2 NAME 3 inherits: \setupsidebar </pre>
<pre> \definesort [...]¹ [...]² [...]³^{OPT} {...}⁴ 1 da nu 2 SINGULAR 3 NAME 4 CONTENT </pre>
<pre> \definespotcolor [...]¹ [...]² [...,³...^{OPT},...] 1 NAME 2 COLOR 3 a = NUMMER niciunul normal multiply ecran overlay softlight hardlight colordodge colorburn darken lighten difference exclusion hue saturation culoare luminosity t = NUMMER e = TEXT p = NUMMER </pre>
<pre> \definestacking [...]¹ [...]²^{OPT} [...,³...^{OPT},...] 1 NAME 2 NAME 3 inherits: \setupstacking </pre>
<pre> \defineste [...]¹^{OPT} \...² {...}³ 1 NUMMER 2 CSNAME 3 CONTENT </pre>
<pre> \definesteaccent ...¹ ...² ...³ 1 CHARACTER 2 CHARACTER 3 CHARACTER </pre>
<pre> \definesteantet [...]¹ [...]²^{OPT} [...,³...^{OPT},...] 1 NAME 2 ABSCHNITT 3 inherits: \seteazatitlu </pre>

<pre> \definestebloc [...]¹ [...]² [...,...³...,...]³ 1 NAME 2 NAME 3 inherits: \seteazabloc </pre>
<pre> \definesteblocsectione [...]¹ [...]² [...,...³...,...]³ 1 NAME 2 NAME 3 inherits: \seteazablocsectione </pre>
<pre> \definestebuffer [...]¹ [...]² [...,...³...,...]³ 1 NAME 2 BUFFER 3 inherits: \seteazabuffer </pre>
<pre> \definestecamp [...]¹ [...]² [...]³ [...,...⁴...,...]⁴ [...]⁵ 1 NAME 2 radio sub text linie push check signature 3 NAME 4 NAME 5 NAME </pre>
<pre> \definestecaracter ...¹ ...² 1 CHARACTER 2 NUMMER </pre>
<pre> \definestecomanda ...¹ ...² 1 CHARACTER 2 BEFEHL </pre>
<pre> \definesteconversie [...]¹ [...]² [...]³ 1 SPRACHE 2 NAME 3 CSNAME </pre>
<pre> \definesteconversie [...]¹ [...]² [...,...³...,...]³ 1 SPRACHE 2 NAME 3 TEXT </pre>
<pre> \definesteculoare [...]¹ [...,...²...,...]² 1 NAME 2 r = NUMMER g = NUMMER b = NUMMER c = NUMMER m = NUMMER y = NUMMER k = NUMMER h = NUMMER s = NUMMER v = NUMMER w = NUMMER x = NUMMER a = NUMMER niciunul normal multiply ecran overlay softlight hardlight colordodge colorburn darken lighten difference exclusion hue saturation culoare luminosity t = NUMMER </pre>
<pre> \definesteculoare [...]¹ [...]² 1 NAME 2 COLOR </pre>
<pre> \definestedescriere [...]¹ [...]² [...,...³...,...]³ 1 NAME 2 NAME 3 inherits: \setupdescription </pre>

```

\definestedimensiunehartie [...] [...2...,...]
1 NAME
2 latime = DIMENSION
  inaltime = DIMENSION
  sus = BEFEHL
  jos = BEFEHL
  stanga = BEFEHL
  dreapta = BEFEHL
  distanta = DIMENSION
  pagina = inherits: \seteazadimensiunihartie
  hartie = inherits: \seteazadimensiunihartie

```

```

\definestedimensiunehartie [...] [...2...,...] [...3...,...]
1 NAME
2 inherits: \seteazadimensiunihartie
3 inherits: \seteazadimensiunihartie

```

```

\definesteenumerare [...] [...2...] [...3...,...]
1 NAME
2 NAME
3 inherits: \setupenumeration

```

```

\definesteeticheta [...] [...2...] [...3...,...]
1 NAME
2 NAME
3 inherits: \setuplabel

```

```

\definestefloat [...] [...2...] [...3...,...]
1 SINGULAR
2 SINGULAR PLURAL
3 inherits: \seteazafloat
instances: chemical figure table intermezzo graphic

```

```

\definestefloat [...] [...2...] [...3...]
1 SINGULAR
2 PLURAL
3 SINGULAR
instances: chemical figure table intermezzo graphic

```

```

\definestefont [...] [...2...] [...3...,...]
1 NAME
2 FONT
3 inherits: \seteazaspatiuinterliniar

```

```

\definestefonttext [...1...,...] [...2...,...] [...3...,...] [...4...,...]
1 NAME implicit
2 NAME DIMENSION
3 rm ss tt hw cg
4 tf = FILE
  bf = FILE
  it = FILE
  sl = FILE
  bi = FILE
  bs = FILE
  sc = FILE
  mr = FILE
  mrlr = FILE
  mrrl = FILE
  mb = FILE
  mblr = FILE
  mbrl = FILE

```

```

\definestefonttext [...1...,...] [...2...,...] [...3...,...] [...4...]
1 NAME implicit
2 NAME DIMENSION
3 rm ss tt hw cg
4 NAME

```

<pre> \definestefont [...]¹ [...]² [...]³ 1 NAME 2 FONT 3 NAME </pre>
<pre> \definesteformatreferinte [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupreferenceformat </pre>
<pre> \definestegrupculori [...]¹ [...]² [x:y:³z,...] 1 NAME 2 gri rgb cmyk spot 3 TRIPLET </pre>
<pre> \definestehbox [...]¹ [...]² 1 NAME 2 DIMENSION </pre>
<pre> \definesteinconjurare [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \seteazainconjurat </pre>
<pre> \definestelista [...]¹ [...]² [...,...³...,...] 1 NAME 2 LISTE 3 inherits: \seteazalista </pre>
<pre> \definestelistacombinata [...]¹ [...,²...] [...,...³...,...] 1 NAME 2 LISTE 3 inherits: \seteazalistacombinata </pre>
<pre> \definestemakeup [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \seteazamakeup </pre>
<pre> \definestemarcaje [...]¹ [...]² [...,...³...,...] 1 NAME 2 BESCHRIFTUNG 3 inherits: \seteazamarcaje </pre>
<pre> \definestemediulfonttext [...]¹ [...]² [...,...³...,...] 1 NAME 2 implicit DIMENSION 3 mare = DIMENSION NUMMER mic = DIMENSION NUMMER a = DIMENSION NUMMER b = DIMENSION NUMMER c = DIMENSION NUMMER d = DIMENSION NUMMER text = DIMENSION NUMMER x = DIMENSION NUMMER xx = DIMENSION NUMMER script = DIMENSION NUMMER scriptscript = DIMENSION NUMMER spatiereinterliniara = DIMENSION em = inclinat italic STYLE BEFEHL * = NUMMER </pre>
<pre> \definestemeniuiinteractiune [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \seteazameniuiinteractiune </pre>

<pre> \definesteoverlay [...¹,...] [...²] [...³] 1 NAME 2 NAME 3 BEFEHL </pre>
<pre> \definestepaleta [...¹] [...,²...,...] 1 NAME 2 NAME = COLOR </pre>
<pre> \definestepaleta [...¹] [...²] 1 NAME 2 NAME </pre>
<pre> \definesteparagraf [...¹] [...²] [...,³...,...] 1 NAME 2 NAME 3 inherits: \seteazaparagrafe </pre>
<pre> \definesteprofil [...¹] [...²] [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupprofile </pre>
<pre> \definesteprogram [...¹] [...²] [...³] 1 NAME 2 TEXT 3 TEXT </pre>
<pre> \definestereferinte [...¹] [...,²,...] 1 NAME 2 REFERENCE </pre>
<pre> \definesteregistru [...¹] [...²] [...,³...,...] 1 NAME 2 NAME 3 inherits: \seteazaregistru </pre>
<pre> \definestesablontabel [...¹] [...²] [...³] [...⁴] 1 NAME 2 TEMPLATE 3 NAME 4 NAME </pre>
<pre> \definestesectiune [...[*]] * NAME </pre>
<pre> \definestesimbol [...¹] [...²] [...³] 1 NAME 2 NAME 3 BEFEHL </pre>
<pre> \definestesimbolfigura [...¹] [...²] [...,³...,...] 1 NAME 2 FILE NAME 3 inherits: \figuraexterna </pre>
<pre> \definestesinonim [...¹] [...²] [...³] [...⁴] 1 SINGULAR 2 PLURAL 3 CSNAME 4 CSNAME </pre>

<pre> \definestesinonimfont [...] [...] [...,..³...,...] 1 NAME 2 FONT 3 features = NAME fallbacks = NAME goodies = NAME designsize = auto implicit </pre>
<pre> \definestesortare [...] [...] [...³] 1 SINGULAR 2 PLURAL 3 niciunul CSNAME </pre>
<pre> \definestestartstop [...] [...] [...,..³...,...] 1 NAME 2 NAME 3 inherits: \setupstartstop </pre>
<pre> \definestestil [...] [...] [...,..³...,...] 1 NAME 2 NAME 3 inherits: \setupstyle </pre>
<pre> \definestestilfont [...,¹...] [...²] 1 NAME 2 NAME </pre>
<pre> \definestestivacampuri [...¹] [...,²...] [...,..³...,...] 1 NAME 2 NAME 3 inherits: \setupfieldcategory </pre>
<pre> \definestesubcamp [...] [...] [...,³...] 1 NAME 2 NAME 3 NAME </pre>
<pre> \definestetabulatori [...¹] [...²] [³...] 1 NAME 2 NAME 3 TEMPLATE </pre>
<pre> \definestetetext [...] [...] [...] [...] [...] [...] [...] 1 NAME 2 sus antet text subsol subsol 3 text margine bordura 4 data numarpagina BESCHRIFTUNG TEXT BEFEHL 5 data numarpagina BESCHRIFTUNG TEXT BEFEHL 6 data numarpagina BESCHRIFTUNG TEXT BEFEHL 7 data numarpagina BESCHRIFTUNG TEXT BEFEHL </pre>
<pre> \definestetexteinconjurate [...,¹...] [...,..²...,...] 1 NAME 2 inherits: \setupframedtext </pre>
<pre> \definestetextinconjurat [...] [...] [...,..³...,...] 1 NAME 2 NAME 3 inherits: \setupframedtext </pre>
<pre> \definestetyping [...] [...] [...,..³...,...] 1 NAME 2 NAME 3 inherits: \seteazatyping </pre>

<pre> \definestyleinstance [...]¹ [...]² [...]³ [...]⁴ 1 NAME OPT OPT 2 rm ss tt mm hw cg 3 tf bf it sl bi bs sc 4 BEFEHL </pre>
<pre> \definesubcolumnset [...]¹ [...]² [...]³,... 1 NAME 2 NAME 3 NUMBER </pre>
<pre> \definesubformula [...]¹ [...]² [...]³,... 1 NAME OPT OPT 2 NAME 3 inherits: \setupsubformula </pre>
<pre> \definesynchronize [...]¹ [...]² [...]³,... 1 NAME OPT OPT 2 NAME 3 inherits: \setupsynchronize </pre>
<pre> \definesynchronizecontent [...]¹ [...]² [...]³,... 1 NAME OPT OPT 2 NAME 3 inherits: \setupsynchronizecontent </pre>
<pre> \definesynonym [...]¹ [...]² [...]³ [...]⁴ {...}⁵ {...}⁶ 1 da nu OPT OPT 2 SINGULAR 3 NAME 4 TEXT 5 TEXT 6 CONTENT </pre>
<pre> \definesystemattribute [...]¹ [...]²,... 1 NAME OPT 2 local global public private pickup </pre>
<pre> \definesystemconstant {...} * NAME </pre>
<pre> \definesystemvariable {...} * NAME </pre>
<pre> \defineTABLEsetup [...]¹ [...]²,... 1 NAME 2 inherits: \setupTABLE </pre>
<pre> \definetabulatemove [...]¹ [...]² [...]³,... 1 NAME OPT OPT 2 NAME 3 inherits: \setuptabulatemove </pre>
<pre> \definetextbackground [...]¹ [...]² [...]³,... 1 NAME OPT OPT 2 NAME 3 inherits: \setuptextbackground </pre>
<pre> \definetextdisplay [...]¹ [...]² [...]³,... 1 NAME OPT OPT 2 NAME 3 inherits: \setuptextdisplay </pre>

<pre> \definetextflow [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuptextflow </pre>
<pre> \definetextnote [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuptextnote </pre>
<pre> \definetokenlist [...][*] * NAME </pre>
<pre> \definetooltip [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuptooltip </pre>
<pre> \definetransliteration [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuptransliteration </pre>
<pre> \definetransparency [...]¹ [...]² 1 NAME 2 NUMMER </pre>
<pre> \definetransparency [...]¹ [...,...²...,...] 1 NAME 2 a = NUMMER niciunul normal multiply ecran overlay softlight hardlight colordodge colorburn darken lighten difference exclusion hue saturation culoare luminosity t = NUMMER </pre>
<pre> \definetransparency [...]¹ [...]² 1 NAME 2 NAME </pre>
<pre> \definetweakedfont [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuptweakedfont </pre>
<pre> \definetype [...]¹ [...]² [...,...³...,...] 1 NAME 2 NAME 3 inherits: \seteazatype </pre>
<pre> \definetypeface [...]¹ [...]² [...]³ [...]⁴ [...]⁵ [...,...⁶...,...] 1 NAME 2 rm ss tt mm hw cg 3 serif sans mono math handwriting calligraphy 4 NAME 5 implicit dtp 6 rscale = auto NUMMER features = NAME fallbacks = NAME goodies = NAME designsize = auto implicit directie = ambele </pre>
<pre> \definetypescriptprefix [...]¹ [...]² 1 NAME 2 TEXT </pre>

$\backslash$ definetypescriptsynonym [¹ ...] [² ...] 1 NAME 2 TEXT
$\backslash$ definetypesetting [¹ ...] [² ...] [..., ³ ...,...] 1 NAME 2 TEXT 3 inherits: \setupexternalfigure
$\backslash$ defineunit [¹ ...] [² ...] [..., ³ ...,...] 1 NAME 2 NAME 3 inherits: \setupunit
$\backslash$ defineuserdata [...] ¹ [...] ² [..., ³ ...,...] 1 NAME 2 NAME 3 inherits: \setupuserdata
$\backslash$ defineuserdataalternative [¹ ...] [² ...] [..., ³ ...,...] 1 NAME 2 NAME 3 inherits: \setupuserdataalternative
$\backslash$ defineverticalbox [¹ ...] [² ...] [..., ³ ...,...] 1 NAME 2 NAME 3 inherits: \setupverticalbox
$\backslash$ defineviewerlayer [¹ ...] [² ...] [..., ³ ...,...] 1 NAME 2 NAME 3 inherits: \setupviewerlayer
$\backslash$ definevspace [¹ ...] [² ...] [³ ...] 1 NAME 2 NAME 3 DIMENSION
$\backslash$ definevspacing [¹ ...] [² ...] 1 NAME 2 inherits: \vspacing
$\backslash$ definevspacingamount [¹ ...] [² ...] [³ ...] 1 NAME 2 DIMENSION 3 DIMENSION
$\backslash$ definewrows [¹ ...] [² ...] [..., ³ ...,...] 1 NAME 2 NAME 3 inherits: \setuprows
$\backslash$ definetable [¹ ...] [² ...] [..., ³ ...,...] 1 NAME 2 NAME 3 inherits: \setupxtable
$\backslash$ defrostparagraphproperties
$\backslash$ delimited [¹ ...] [² ...] { ³ ...} 1 NAME 2 SPRACHE 3 CONTENT

\definacarakteristiciregistru [¹ ...] [..., ² ...,...] 1 NAME OPT 2 language = implicit DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scn SPRACHE metoda = implicit inainte dupa primul ultim ch mm zm pm mc zc pc uc numberorder = numere compress = da nu tot criteriu = local text curent precedent tot ABSCHNITT	
\definanumartitlu [...] * ABSCHNITT	
\definednoflines {...} * CONTENT	
\definenofoflines {...} * CONTENT	
\detokenizedCOMANDApameter {...} * KEY	
\detokenizedrootCOMANDApameter {...} * KEY	
\devanagarinumerals {...} * NUMMER	
\digits {...} * NUMMER	
\digitsbreak	
\digits ... * NUMMER	
\dimensiontocount [¹ ...] [² ...] 1 DIMENSION 2 CSNAME	
\dimensiune {...} * CONTENT	
\din [...] * REFERENCE	
\directboxfromcache [¹ ...] [² ...] 1 NAME 2 NUMMER TEXT	
\directcolor [...] * COLOR	
\directcolored [..., [*] ...,...] * inherits: \definesteculoare	
\directcolored [...] * COLOR	
\directCOMANDApameter {...} * KEY	

\directconvertedcounter { ¹ ...} { ² ...} 1 NAME 2 primul precedent urmatorul ultim numar
\directcopyboxfromcache { ¹ ...} { ² ...} 1 NAME 2 NUMBER TEXT
\directdummysparameter { [*] ...} * KEY
\directgetboxllx [*] .. * CSNAME NUMBER
\directgetboxlly [*] .. * CSNAME NUMBER
\directgoto { ¹ ...} [² ...] 1 CONTENT 2 REFERENCE
\directhighlight { ¹ ...} { ² ...} 1 NAME 2 TEXT
\directlocalframed [¹ ...] { ² ...} 1 NAME 2 CONTENT
\directluacode { [*] ...} * BEFEHL
\directmathextensible [¹ ...] 1 reverse matematica text chemistry 2 NUMBER 3 TEXT 4 TEXT
\directparwrapper { ¹ ...} { ² ...} 1 CONTENT 2 CONTENT
\directselect { ¹ ...} { ² ...} { ³ ...} { ⁴ ...} { ⁵ ...} { ⁶ ...} 1 NAME 2 CONTENT 3 CONTENT 4 CONTENT 5 CONTENT 6 CONTENT
\directsetbar { [*] ...} * NAME
\directsetup { [*] ...} * NAME
\directsymbol { ¹ ...} { ² ...} 1 NAME 2 NAME

<code>\directtexttextensibile</code> <code>[...]</code> <code>{...}</code> <code>{...}</code> <code>{...}</code> 1 reverse matematica text chemistry 2 NUMMER 3 TEXT 4 TEXT
<code>\directvspacing</code> <code>{...,*,...}</code> * inherits: \vspacing
<code>\dis</code> <code>{...}</code> * CONTENT
<code>\disableddelimiter</code>
<code>\disabledirectives</code> <code>[...*,...]</code> * NAME
<code>\disableexperiments</code> <code>[...*,...]</code> * NAME
<code>\disablefiller</code>
<code>\disablemathautofencing</code>
<code>\disablemathautonumbers</code>
<code>\disablemathautospaceing</code>
<code>\disablemathpunctuation</code>
<code>\disablemode</code> <code>[...*,...]</code> * NAME
<code>\disableoutputstream</code>
<code>\disableparpositions</code>
<code>\disableregime</code>
<code>\disabletrackers</code> <code>[...*,...]</code> * NAME
<code>\displaymath</code> <code>{...}</code> * CONTENT
<code>\displaymathematics</code> <code>{...}</code> * CONTENT
<code>\displaymessage</code> <code>{...}</code> * TEXT
<code>\disposeluatable</code> <code>*..</code> * CSNAME

<code>\distributedsize {...} {...} {...}</code> 1 DIMENSION 2 DIMENSION 3 NUMMER
<code>\dividedsize {...} {...} {...}</code> 1 DIMENSION 2 DIMENSION 3 NUMMER
<code>\dm {...}</code> * CONTENT
<code>\doadaptleftskip {...}</code> * da nu standard DIMENSION
<code>\doadaptrightskip {...}</code> * da nu standard DIMENSION
<code>\doaddfeature {...,*...}</code> * NAME
<code>\doapostrophes</code>
<code>\doassign [...¹] [...²...]</code> 1 TEXT 2 KEY = VALUE
<code>\doassignempty [...¹] [...²...]</code> 1 TEXT 2 KEY = VALUE
<code>\doboundtext {...¹} {...²} {...³}</code> 1 TEXT 2 DIMENSION 3 BEFEHL
<code>\docheckassignment {...}</code> * TEXT
<code>\docheckedpair {...,*...}</code> * TEXT
<code>\documentvariable {...}</code> * KEY
<code>\dodoubleargument \...¹ [...²] [...³]</code> 1 CSNAME 2 TEXT 3 TEXT
<code>\dodoubleargumentwithset \...¹ [...²,...] [...³]</code> 1 CSNAME 2 TEXT 3 TEXT
<code>\dodoubleempty \...¹ [...²] [...³]</code> 1 CSNAME 2 TEXT 3 TEXT

<pre> \dodoubleemptywithset \¹... [...,²...] [...³] 1 CSNAME 2 TEXT 3 TEXT </pre>
--

<pre> \dodoublegroupempty \.^{.1}... \.^{.2}... \.^{.3}... 1 CSNAME 2 TEXT 3 TEXT </pre>	<pre> \dodoublegroupempty \.^{.1}... \.^{.2}... \.^{.3}... 1 CSNAME 2 TEXT 3 TEXT </pre>	<pre> \dodoublegroupempty \.^{.1}... \.^{.2}... \.^{.3}... 1 CSNAME 2 TEXT 3 TEXT </pre>	<pre> \dodoublegroupempty \.^{.1}... \.^{.2}... \.^{.3}... 1 CSNAME 2 TEXT 3 TEXT </pre>
--	--	--	--

```
\doeassign    [.1.]    [..2..]
1  TEXT
2  KEY =  VALUE
```

<pre>\doexpandedrecurse {.^..} {.^..}</pre>
<pre>1 NUMBER</pre>
<pre>2 BEFEHL</pre>

<pre> \doexpandedrecursed {\.^{.1}.} {\.^{.2}.} 1 NUMBER 2 BEFEHL </pre>

`\doexplicitlyhyphens`

```
\dofastloopcs  {\.^1.}  \.^2..
1  NUMBER
2  CSNAME
```

<pre>\dogetattribute {...} * NAME</pre>
--

```
\dogetattributeid  {...}
*   NAME
```

```
\dogetcommacommandelement    ^1. \from    ^2. \to    ^3.
1  NUMMER
2  TEXT
3  CSNAME
```

<code>\dogetobjectreference {¹...}</code> <code>{²...}</code> <code>\³...</code> <code>{⁴...}</code>				
1	NAME			
2	NAME			
3	CSNAME			
4	CONTENT			

\dogetobjectreferencepage { ¹ ...} { ² ...} \ ³ ... { ⁴ ...}				
1	NAME			
2	NAME			
3	CSNAME			
4	CONTENT			

\dogobbledoubleempty	$[\overset{1}{\dots}]$	$[\overset{2}{\dots}]$
1 TEXT	OPT	OPT
2 TEXT		

<code>\dogobblesingleempty</code>	[...]
* TEXT	OPT

\dohyphencollapsing

`\dohyphens`

<pre> \doif {...} {...} {...} 1 CONTENT 2 CONTENT 3 TRUE </pre>
<pre> \doifallcommon {...,¹...} {...,²...} {...³} 1 TEXT 2 TEXT 3 TRUE </pre>
<pre> \doifallcommonelse {...,¹...} {...,²...} {...³} {...⁴} 1 TEXT 2 TEXT 3 TRUE 4 FALSE </pre>
<pre> \doifalldefinedelse {...,¹...} {...²} {...³} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifallmodes {...,¹...} {...²} 1 NAME 2 TRUE </pre>
<pre> \doifallmodeselse {...,¹...} {...²} {...³} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifallundefinedelse {...,¹...} {...²} {...³} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifassignmentelse {...¹} {...²} {...³} 1 TEXT 2 TRUE 3 FALSE </pre>
<pre> \doifassignmentelsecs {...¹} \...² \...³ 1 TEXT 2 CSNAME 3 CSNAME </pre>
<pre> \doifblackelse {...¹} {...²} {...³} 1 COLOR 2 TRUE 3 FALSE </pre>
<pre> \doifbothsides {...¹} {...²} {...³} 1 BEFEHL 2 BEFEHL 3 BEFEHL </pre>
<pre> \doifbothsidesoverruled {...¹} {...²} {...³} 1 BEFEHL 2 BEFEHL 3 BEFEHL </pre>
<pre> \doifboxelse {...¹} {...²} {...³} {...⁴} 1 NAME 2 NAME 3 TRUE 4 FALSE </pre>

\doifbufferelse {...} {...} {...}

1 BUFFER
2 TRUE
3 FALSE

\doifcheckedpagestate {...} {...} {...} {...} {...} {...} {...}

1 REFERENCE
2 BEFEHL
3 BEFEHL
4 BEFEHL
5 BEFEHL
6 BEFEHL
7 BEFEHL

\doifcheckedreferencefoundelse {...} {...} {...}

1 REFERENCE
2 TRUE
3 FALSE

\doifcolor {...} {...}

1 COLOR
2 TRUE

\doifcolorelse {...} {...} {...}

1 COLOR
2 TRUE
3 FALSE

\doifcommandhandler \... {...} {...}

1 CSNAME
2 NAME
3 TRUE

\doifcommandhandlerelse \... {...} {...} {...}

1 CSNAME
2 NAME
3 TRUE
4 FALSE

\doifcommon {...¹,...} {...²,...} {...³}

1 TEXT
2 TEXT
3 TRUE

\doifcommonelse {...¹,...} {...²,...} {...³} {...⁴}

1 TEXT
2 TEXT
3 TRUE
4 FALSE

\doifcontent {...} {...} {...} \... {...}

1 BEFEHL
2 BEFEHL
3 BEFEHL
4 CSNAME
5 CONTENT

\doifconversiondefinedelse {...} {...} {...}

1 NAME
2 TRUE
3 FALSE

\doifconversionnumberelse {...} {...} {...} {...}

1 NAME
2 NUMMER
3 TRUE
4 FALSE

<pre> \doifcounter {...} {...} 1 NAME 2 TRUE </pre>
<pre> \doifcounterelse {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifcurrentfonthasfeatureelse {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifdefined {...} {...} 1 NAME 2 TRUE </pre>
<pre> \doifdefinedcounter {...} {...} 1 NAME 2 TRUE </pre>
<pre> \doifdefinedcounterelse {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifdefinedelse {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifdimensionelse {...} {...} {...} 1 TEXT 2 TRUE 3 FALSE </pre>
<pre> \doifdimenstringelse {...} {...} {...} 1 TEXT 2 TRUE 3 FALSE </pre>
<pre> \doifdocumentargument {...} {...} 1 NAME 2 TRUE </pre>
<pre> \doifdocumentargumentelse {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifdocumentfilename {...} {...} 1 NUMMER 2 TRUE </pre>
<pre> \doifdocumentfilenameelse {...} {...} {...} 1 NUMMER 2 TRUE 3 FALSE </pre>
<pre> \doifdocumentvariable {...} {...} 1 KEY 2 TRUE </pre>

<pre> \doifdocumentvariableelse {...} {...} {...} 1 KEY 2 TRUE 3 FALSE </pre>
<pre> \doifdrawingblackelse {...} {...} 1 TRUE 2 FALSE </pre>
<pre> \doifelse {...} {...} {...} {...} 1 CONTENT 2 CONTENT 3 TRUE 4 FALSE </pre>
<pre> \doifelseallcommon {...,¹...} {...,²...} {...³} {...⁴} 1 TEXT 2 TEXT 3 TRUE 4 FALSE </pre>
<pre> \doifelsealldefined {...,¹...} {...²} {...³} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifelseallmodes {...,¹...} {...²} {...³} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifelseallundefined {...,¹...} {...²} {...³} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifelseassignment {...¹} {...²} {...³} 1 TEXT 2 TRUE 3 FALSE </pre>
<pre> \doifelseassignmentcs {...¹} \^{²} \^{³} 1 TEXT 2 CSNAME 3 CSNAME </pre>
<pre> \doifelseblack {...¹} {...²} {...³} 1 COLOR 2 TRUE 3 FALSE </pre>
<pre> \doifelseblockempty {...¹} {...²} {...³} {...⁴} {...⁵} 1 NAME 2 NAME 3 text ABSCHNITT 4 TRUE 5 FALSE </pre>
<pre> \doifelsebox {...¹} {...²} {...³} {...⁴} 1 NAME 2 NAME 3 TRUE 4 FALSE </pre>

```
\doifelseboxincache    {...}    {...}    {...}    {...}
1  NAME
2  NUMMER TEXT
3  TRUE
4  FALSE
```

```
\doifelsebuffer    {...}    {...}    {...}
1  BUFFER
2  TRUE
3  FALSE
```

```
\doifelsebufferempty    {...}    {...}    {...}
1  BUFFER
2  TRUE
3  FALSE
```

```
\doifelsecolor    {...}    {...}    {...}
1  COLOR
2  TRUE
3  FALSE
```

```
\doifelsecommandhandler    \...    {...}    {...}    {...}
1  CSNAME
2  NAME
3  TRUE
4  FALSE
```

```
\doifelsecommon    {...,1...}    {...,2...}    {...}    {...4}
1  TEXT
2  TEXT
3  TRUE
4  FALSE
```

```
\doifelseconversiondefined    {...}    {...}    {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifelseconversionnumber    {...}    {...}    {...}    {...}
1  NAME
2  NUMMER
3  TRUE
4  FALSE
```

```
\doifelsecounter    {...}    {...}    {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifelsecounteractive    {...}    {...}    {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifelsecurrentfonthasfeature    {...}    {...}    {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifelsecurrentsortingingused    {...}    {...}
1  TRUE
2  FALSE
```

\doifelsecurrentsynonymshown {...} {...} 1 TRUE 2 FALSE
\doifelsecurrentsynonymused {...} {...} 1 TRUE 2 FALSE
\doifelsedefined {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelsedefinedcounter {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelsedimension {...} {...} {...} 1 TEXT 2 TRUE 3 FALSE
\doifelsedimenstring {...} {...} {...} 1 TEXT 2 TRUE 3 FALSE
\doifelsedocumentargument {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelsedocumentfilename {...} {...} {...} 1 NUMMER 2 TRUE 3 FALSE
\doifelsedocumentvariable {...} {...} {...} 1 KEY 2 TRUE 3 FALSE
\doifelsedrawingblack {...} {...} 1 TRUE 2 FALSE
\doifelseempty {...} {...} {...} 1 CONTENT 2 TRUE 3 FALSE
\doifelseemptyvalue {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelseemptyvariable {...} {...} {...} {...} 1 NAME 2 KEY 3 TRUE 4 FALSE

<pre> \doifelseenv {...} {...} {...} 1 KEY 2 TRUE 3 FALSE </pre>
<pre> \doifelsefastoptionalcheck {...} {...} 1 TRUE 2 FALSE </pre>
<pre> \doifelsefastoptionalcheckcs \^1... \^2... 1 CSNAME 2 CSNAME </pre>
<pre> \doifelsefieldbody {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifelsefieldcategory {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifelsefigure {...} {...} {...} 1 FILE 2 TRUE 3 FALSE </pre>
<pre> \doifelsefile {...} {...} {...} 1 FILE 2 TRUE 3 FALSE </pre>
<pre> \doifelsefiledefined {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifelsefileexists {...} {...} {...} 1 FILE 2 TRUE 3 FALSE </pre>
<pre> \doifelsefirstchar {...} {...} {...} {...} 1 TEXT 2 TEXT 3 TRUE 4 FALSE </pre>
<pre> \doifelseflagged {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifelsefontchar {...} {...} {...} {...} 1 FONT 2 NUMMER 3 TRUE 4 FALSE </pre>
<pre> \doifelsefontfeature {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>

<pre> \doifelsefontpresent {...} {...} {...} 1 FONT 2 TRUE 3 FALSE </pre>
<pre> \doifelsefontsynonym {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifelseframed \^1... {...} {...} 1 CSNAME 2 TRUE 3 FALSE </pre>
<pre> \doifelsehasspace {...} {...} {...} 1 TEXT 2 TRUE 3 FALSE </pre>
<pre> \doifelsehelp {...} {...} 1 TRUE 2 FALSE </pre>
<pre> \doifelseincsname {...} {...} {...} {...} 1 TEXT 2 CSNAME 3 TRUE 4 FALSE </pre>
<pre> \doifelseindented {...} {...} 1 TRUE 2 FALSE </pre>
<pre> \doifelseinelement {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifelseinputfile {...} {...} {...} 1 FILE 2 TRUE 3 FALSE </pre>
<pre> \doifelseinsertion {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifelseinset {...} {...}^2,... {...} {...}^4 1 TEXT 2 TEXT 3 TRUE 4 FALSE </pre>
<pre> \doifelseinstring {...} {...} {...} {...}^4 1 TEXT 2 TEXT 3 TRUE 4 FALSE </pre>

\doifelseinsymbolset {...} {...} {...} {...} 1 NAME 2 NAME 3 TRUE 4 FALSE
\doifelseintoks {...} {...} {...} {...} 1 BEFEHL 2 BEFEHL 3 TRUE 4 FALSE
\doifelseitalic {...} {...} 1 TRUE 2 FALSE
\doifelselanguage {...} {...} {...} 1 SPRACHE 2 TRUE 3 FALSE
\doifelselayerdata {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelselayoutdefined {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelselayoutsomeline {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelselayouttextline {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelseleapyear {...} {...} {...} 1 NUMMER 2 TRUE 3 FALSE
\doifelselist {...} {...} {...} 1 LISTE 2 TRUE 3 FALSE
\doifelselocation {...} {...} 1 TRUE 2 FALSE
\doifelselocfile {...} {...} {...} 1 FILE 2 TRUE 3 FALSE
\doifelseMPgraphic {...} {...} {...} 1 NAME 2 TRUE 3 FALSE

\doifelsemainfloatbody { ¹ ...} { ² ...} 1 TRUE 2 FALSE
\doifelsemarkedcontent { ¹ ...} { ² ...} { ³ ...} 1 NAME 2 TRUE 3 FALSE
\doifelsemarkedpage { ¹ ...} { ² ...} { ³ ...} 1 NAME 2 TRUE 3 FALSE
\doifelsemarking { ¹ ...} { ² ...} { ³ ...} 1 BESCHRIFTUNG 2 TRUE 3 FALSE
\doifelsemessage { ¹ ...} { ² ...} { ³ ...} { ⁴ ...} 1 NAME 2 NAME NUMBER 3 TRUE 4 FALSE
\doifelsemode { ¹ ...,...} { ² ...} { ³ ...} 1 NAME 2 TRUE 3 FALSE
\doifelsenextbgroup { ¹ ...} { ² ...} 1 TRUE 2 FALSE
\doifelsenextbgroupcs \ ¹ ... \ ² ... 1 CSNAME 2 CSNAME
\doifelsenextchar { ¹ ...} { ² ...} { ³ ...} 1 CHARACTER 2 TRUE 3 FALSE
\doifelsenextoptional { ¹ ...} { ² ...} 1 TRUE 2 FALSE
\doifelsenextoptionalcs \ ¹ ... \ ² ... 1 CSNAME 2 CSNAME
\doifelsenextparenthesis { ¹ ...} { ² ...} 1 TRUE 2 FALSE
\doifelsenonzeropositive { ¹ ...} { ² ...} { ³ ...} 1 NUMMER 2 TRUE 3 FALSE
\doifelsenoteonsamepage { ¹ ...} { ² ...} { ³ ...} 1 NAME 2 TRUE 3 FALSE

<pre> \doifelsenothing {...} {...} {...} 1 TEXT 2 TRUE 3 FALSE </pre>
<pre> \doifelsenumber {...} {...} {...} 1 TEXT 2 TRUE 3 FALSE </pre>
<pre> \doifelseobjectfound {...} {...} {...} {...} 1 NAME 2 NAME 3 TRUE 4 FALSE </pre>
<pre> \doifelseobjectreferencefound {...} {...} {...} {...} 1 NAME 2 NAME 3 TRUE 4 FALSE </pre>
<pre> \doifelseoddpage {...} {...} 1 BEFEHL 2 BEFEHL </pre>
<pre> \doifelseoddpagefloat {...} {...} 1 TRUE 2 FALSE </pre>
<pre> \doifelseoldercontext {...} {...} {...} 1 NUMMER 2 TRUE 3 FALSE </pre>
<pre> \doifelseolderversion {...} {...} {...} {...} 1 NUMMER 2 NUMMER 3 TRUE 4 FALSE </pre>
<pre> \doifelseorientation {...} {...} {...} 1 normal up down stanga dreapta sus subsol NAME 2 TRUE 3 FALSE </pre>
<pre> \doifelseoverlapping {...} {...} {...} {...} 1 NAME 2 NAME 3 TRUE 4 FALSE </pre>
<pre> \doifelseoverlay {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifelseparallel {...} {...,²...} {...} {...} 1 NAME 2 NAME tot 3 TRUE 4 FALSE </pre>

\doifelseparentfile {...} {...} {...} 1 FILE 2 TRUE 3 FALSE
\doifelseparwrapper {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelsepath {...} {...} {...} 1 PATH 2 TRUE 3 FALSE
\doifelsepathexists {...} {...} {...} 1 PATH 2 TRUE 3 FALSE
\doifelsepatterns {...} {...} {...} 1 SPRACHE 2 TRUE 3 FALSE
\doifelseposition {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelsepositionaction {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelsepositiononpage {...} {...} {...} {...} 1 NAME 2 NUMMER 3 TRUE 4 FALSE
\doifelsepositionsonsamepage {..., ¹ ...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelsepositionsonthispage {..., ¹ ...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelsepositionsused {...} {...} 1 TRUE 2 FALSE
\doifelserferencechecked {...} {...} {...} 1 REFERENCE 2 TRUE 3 FALSE
\doifelserereferenced {...} {...} {...} 1 REFERENCE 2 TRUE 3 FALSE

\doifelsereferencefound {...} {...} {...} 1 REFERENCE 2 TRUE 3 FALSE
\doifelserightpage {...} {...} 1 TRUE 2 FALSE
\doifelserightpagefloat {...} {...} 1 TRUE 2 FALSE
\doifelserighttopleftinbox ... {...} {...} 1 CSNAME NUMMER 2 TRUE 3 FALSE
\doifelsesamelinereference {...} {...} {...} 1 REFERENCE 2 TRUE 3 FALSE
\doifelsesamestring {...} {...} {...} {...} 1 TEXT 2 TEXT 3 TRUE 4 FALSE
\doifelsesetups {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelsesimilartokens {...} {...} {...} {...} 1 TEXT 2 TEXT 3 TRUE 4 FALSE
\doifelsesomebackground {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelsesomespace {...} {...} {...} 1 TEXT 2 TRUE 3 FALSE
\doifelsesomething {...} {...} {...} 1 TEXT 2 TRUE 3 FALSE
\doifelsesometoks \... {...} {...} 1 CSNAME 2 TRUE 3 FALSE
\doifelsestringinstr {...} {...} {...} {...} 1 TEXT 2 TEXT 3 TRUE 4 FALSE

\doifelsestructurelisthasnumber {...} {...} 1 TRUE 2 FALSE
\doifelsestructurelisthaspage {...} {...} 1 TRUE 2 FALSE
\doifelsesymboldefined {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelsesymbolset {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelsetaggednoteonsamepage {...} {...} {...} {...} 1 NAME 2 NAME 3 TRUE 4 FALSE
\doifelsetext {...} {...} {...} 1 TEXT 2 TRUE 3 FALSE
\doifelsetextflow {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelsetextflowcollector {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelsetopofpage {...} {...} 1 TRUE 2 FALSE
\doifelsetypingfile {...} {...} {...} 1 FILE 2 TRUE 3 FALSE
\doifelseundefined {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelseupcomingrightpage {...} {...} 1 TRUE 2 FALSE
\doifelseurldefined {...} {...} {...} 1 NAME 2 TRUE 3 FALSE

<pre> \doifelsevalue {...} {...} {...} {...} 1 NAME 2 TEXT 3 TRUE 4 FALSE </pre>
<pre> \doifelsevaluenothing {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifelsevariable {...} {...} {...} {...} 1 NAME 2 KEY 3 TRUE 4 FALSE </pre>
<pre> \doifempty {...} {...} 1 CONTENT 2 TRUE </pre>
<pre> \doifemptyelse {...} {...} {...} 1 CONTENT 2 TRUE 3 FALSE </pre>
<pre> \doifemptytoks \^1... {...} 1 CSNAME 2 TRUE </pre>
<pre> \doifemptyvalue {...} {...} 1 NAME 2 TRUE </pre>
<pre> \doifemptyvalueelse {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifemptyvariable {...} {...} {...} 1 NAME 2 KEY 3 TRUE </pre>
<pre> \doifemptyvariableelse {...} {...} {...} {...} 1 NAME 2 KEY 3 TRUE 4 FALSE </pre>
<pre> \doifenv {...} {...} 1 KEY 2 TRUE </pre>
<pre> \doifenvelse {...} {...} {...} 1 KEY 2 TRUE 3 FALSE </pre>
<pre> \doiffastoptionalcheckcselse \^1... \^2... 1 CSNAME 2 CSNAME </pre>

\doiffastoptionalcheckelse { ¹ ..} { ² ..} 1 TRUE 2 FALSE
\doiffielddbodyelse { ¹ ..} { ² ..} { ³ ..} 1 NAME 2 TRUE 3 FALSE
\doiffielddcategoryelse { ¹ ..} { ² ..} { ³ ..} 1 NAME 2 TRUE 3 FALSE
\doiffigureelse { ¹ ..} { ² ..} { ³ ..} 1 FILE 2 TRUE 3 FALSE
\doiffile { ¹ ..} { ² ..} 1 FILE 2 TRUE
\doiffiledefinedelse { ¹ ..} { ² ..} { ³ ..} 1 NAME 2 TRUE 3 FALSE
\doiffileelse { ¹ ..} { ² ..} { ³ ..} 1 FILE 2 TRUE 3 FALSE
\doiffileexistselse { ¹ ..} { ² ..} { ³ ..} 1 FILE 2 TRUE 3 FALSE
\doiffirstcharelse { ¹ ..} { ² ..} { ³ ..} { ⁴ ..} 1 TEXT 2 TEXT 3 TRUE 4 FALSE
\doifflaggedelse { ¹ ..} { ² ..} { ³ ..} 1 NAME 2 TRUE 3 FALSE
\doiffontcharelse { ¹ ..} { ² ..} { ³ ..} { ⁴ ..} 1 FONT 2 NUMMER 3 TRUE 4 FALSE
\doiffontfeatureelse { ¹ ..} { ² ..} { ³ ..} 1 NAME 2 TRUE 3 FALSE
\doiffontpresentelse { ¹ ..} { ² ..} { ³ ..} 1 FONT 2 TRUE 3 FALSE

<pre> \doiffontsynonymelse {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifhasspaceelse {...} {...} {...} 1 TEXT 2 TRUE 3 FALSE </pre>
<pre> \doifhelpelse {...} {...} 1 TRUE 2 FALSE </pre>
<pre> \doifincsnameelse {...} {...} {...} {...} 1 TEXT 2 CSNAME 3 TRUE 4 FALSE </pre>
<pre> \doifinelementelse {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifinputfileelse {...} {...} {...} 1 FILE 2 TRUE 3 FALSE </pre>
<pre> \doifinsetionelse {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifinset {...} {...,²...} {...} 1 TEXT 2 TEXT 3 TRUE </pre>
<pre> \doifinsetelse {...} {...,²...} {...} {...} 1 TEXT 2 TEXT 3 TRUE 4 FALSE </pre>
<pre> \doifinstring {...} {...} {...} 1 TEXT 2 TEXT 3 TRUE </pre>
<pre> \doifinstringelse {...} {...} {...} {...} 1 TEXT 2 TEXT 3 TRUE 4 FALSE </pre>
<pre> \doifinsymbolset {...} {...} {...} {...} 1 NAME 2 NAME 3 TRUE 4 FALSE </pre>

```
\doifinsymbolsetelse  {...}  {...}  {...}  {...}
1  NAME
2  NAME
3  TRUE
4  FALSE
```

```
\doifintokselsetelse  {...}  {...}  {...}  {...}
1  BEFEHL
2  BEFEHL
3  TRUE
4  FALSE
```

```
\doifitalicelsetelse  {...}  {...}
1  TRUE
2  FALSE
```

```
\doiflanguageelsetelse  {...}  {...}  {...}
1  SPRACHE
2  TRUE
3  FALSE
```

```
\doiflayerdataelsetelse  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doiflayoutdefinedelsetelse  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doiflayoutsomelineelsetelse  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doiflayouttextlineelsetelse  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifleapyearelsetelse  {...}  {...}  {...}
1  NUMMER
2  TRUE
3  FALSE
```

```
\doiflistelsetelse  {...}  {...}  {...}
1  LISTE
2  TRUE
3  FALSE
```

```
\doiflocationelsetelse  {...}  {...}
1  TRUE
2  FALSE
```

```
\doiflocfileelsetelse  {...}  {...}  {...}
1  FILE
2  TRUE
3  FALSE
```

```
\doifMPgraphicelsetelse  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

\doifmainfloatbodyelse { ¹ ..} { ² ..} 1 TRUE 2 FALSE
\doifmarkedpage { ¹ ..} { ² ..} { ³ ..} 1 NAME 2 TRUE 3 FALSE
\doifmarkingelse { ¹ ..} { ² ..} { ³ ..} 1 BESCHRIFTUNG 2 TRUE 3 FALSE
\doifmessageelse { ¹ ..} { ² ..} { ³ ..} { ⁴ ..} 1 NAME 2 NAME NUMBER 3 TRUE 4 FALSE
\doifmode {... ¹ ,...} { ² ..} 1 NAME 2 TRUE
\doifmodeelse {... ¹ ,...} { ² ..} { ³ ..} 1 NAME 2 TRUE 3 FALSE
\doifnextbgroupcselse \ ¹ ... \ ² .. 1 CSNAME 2 CSNAME
\doifnextbgroupelse { ¹ ..} { ² ..} 1 TRUE 2 FALSE
\doifnextcharelse { ¹ ..} { ² ..} { ³ ..} 1 CHARACTER 2 TRUE 3 FALSE
\doifnextoptionalcselse \ ¹ ... \ ² .. 1 CSNAME 2 CSNAME
\doifnextoptionalelse { ¹ ..} { ² ..} 1 TRUE 2 FALSE
\doifnextparenthesiselse { ¹ ..} { ² ..} 1 TRUE 2 FALSE
\doifnonzeropositiveelse { ¹ ..} { ² ..} { ³ ..} 1 NUMBER 2 TRUE 3 FALSE
\doifnot { ¹ ..} { ² ..} { ³ ..} 1 CONTENT 2 CONTENT 3 TRUE

<pre> \doifnotallcommon {...,¹...} {...,²...} {...,³...} 1 TEXT 2 TEXT 3 TRUE </pre>
<pre> \doifnotallmodes {...,¹...} {...,²...} 1 NAME 2 TRUE </pre>
<pre> \doifnotanchorbox {...,¹...} {...,²...} 1 NAME 2 TRUE </pre>
<pre> \doifnotcommandhandler \{¹...} {...,²...} {...,³...} 1 CSNAME 2 NAME 3 TRUE </pre>
<pre> \doifnotcommon {...,¹...} {...,²...} {...,³...} 1 TEXT 2 TEXT 3 TRUE </pre>
<pre> \doifnotcounter {...,¹...} {...,²...} 1 NAME 2 TRUE </pre>
<pre> \doifnotdocumentargument {...,¹...} {...,²...} 1 NAME 2 TRUE </pre>
<pre> \doifnotdocumentfilename {...,¹...} {...,²...} 1 NUMBER 2 TRUE </pre>
<pre> \doifnotdocumentvariable {...,¹...} {...,²...} 1 KEY 2 TRUE </pre>
<pre> \doifnotempty {...,¹...} {...,²...} 1 CONTENT 2 TRUE </pre>
<pre> \doifnotemptyvalue {...,¹...} {...,²...} 1 NAME 2 TRUE </pre>
<pre> \doifnotemptyvariable {...,¹...} {...,²...} {...,³...} 1 NAME 2 KEY 3 TRUE </pre>
<pre> \doifnotenv {...,¹...} {...,²...} 1 KEY 2 TRUE </pre>
<pre> \doifnoteonsamepageelse {...,¹...} {...,²...} {...,³...} 1 NAME 2 TRUE 3 FALSE </pre>

\doifnotescollected {...} {...} 1 NAME 2 TRUE
\doifnotfile {...} {...} 1 FILE 2 TRUE
\doifnotflagged {...} {...} 1 NAME 2 TRUE
\doifnothing {...} {...} 1 TEXT 2 TRUE
\doifnothingelse {...} {...} {...} 1 TEXT 2 TRUE 3 FALSE
\doifnotinset {...} {..., ² ...} {... ³ } 1 TEXT 2 TEXT 3 TRUE
\doifnotinsidesplitfloat {...} * TRUE
\doifnotinstring {... ¹ } {... ² } {... ³ } 1 TEXT 2 TEXT 3 TRUE
\doifnotmode {..., ¹ ...} {... ² } 1 NAME 2 TRUE
\doifnotnumber {... ¹ } {... ² } 1 TEXT 2 TRUE
\doifnotsamestring {... ¹ } {... ² } {... ³ } 1 TEXT 2 TEXT 3 TRUE
\doifnotsetups {... ¹ } {... ² } 1 NAME 2 TRUE
\doifnotvalue {... ¹ } {... ² } {... ³ } 1 NAME 2 TEXT 3 TRUE
\doifnotvariable {... ¹ } {... ² } {... ³ } 1 NAME 2 KEY 3 TRUE

<pre> \doifnumber {...} {...} 1 TEXT 2 TRUE </pre>
<pre> \doifnumberelse {...} {...} {...} 1 TEXT 2 TRUE 3 FALSE </pre>
<pre> \doifobjectfoundelse {...} {...} {...} {...} 1 NAME 2 NAME 3 TRUE 4 FALSE </pre>
<pre> \doifobjectreferencefoundelse {...} {...} {...} {...} 1 NAME 2 NAME 3 TRUE 4 FALSE </pre>
<pre> \doifoddpageelse {...} {...} 1 BEFEHL 2 BEFEHL </pre>
<pre> \doifoddpagefloatelse {...} {...} 1 TRUE 2 FALSE </pre>
<pre> \doifoldercontextelse {...} {...} {...} 1 NUMMER 2 TRUE 3 FALSE </pre>
<pre> \doifolderversionelse {...} {...} {...} {...} 1 NUMMER 2 NUMMER 3 TRUE 4 FALSE </pre>
<pre> \doifoutermode {...} * CONTENT </pre>
<pre> \doifoverlappingelse {...} {...} {...} {...} 1 NAME 2 NAME 3 TRUE 4 FALSE </pre>
<pre> \doifoverlayelse {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifparallelelse {...} {...,²...} {...} {...} 1 NAME 2 NAME tot 3 TRUE 4 FALSE </pre>
<pre> \doifparentfileelse {...} {...} {...} 1 FILE 2 TRUE 3 FALSE </pre>

\doifpathelse { ¹ ..} { ² ..} { ³ ..} 1 PATH 2 TRUE 3 FALSE
\doifpathexistselse { ¹ ..} { ² ..} { ³ ..} 1 PATH 2 TRUE 3 FALSE
\doifpatternself { ¹ ..} { ² ..} { ³ ..} 1 SPRACHE 2 TRUE 3 FALSE
\doifposition { ¹ ..} { ² ..} { ³ ..} 1 NAME 2 TRUE 3 FALSE
\doifpositionaction { ¹ ..} { ² ..} { ³ ..} 1 NAME 2 TRUE 3 FALSE
\doifpositionactionelse { ¹ ..} { ² ..} { ³ ..} 1 NAME 2 TRUE 3 FALSE
\doifpositionelse { ¹ ..} { ² ..} { ³ ..} 1 NAME 2 TRUE 3 FALSE
\doifpositiononpageelse { ¹ ..} { ² ..} { ³ ..} { ⁴ ..} 1 NAME 2 NUMMER 3 TRUE 4 FALSE
\doifpositionsonsamepageelse { ¹ .., ¹ ..} { ² ..} { ³ ..} 1 NAME 2 TRUE 3 FALSE
\doifpositionsonthispageelse { ¹ .., ¹ ..} { ² ..} { ³ ..} 1 NAME 2 TRUE 3 FALSE
\doifpositionsusedelse { ¹ ..} { ² ..} 1 TRUE 2 FALSE
\doifreferencedelse { ¹ ..} { ² ..} { ³ ..} 1 REFERENCE 2 TRUE 3 FALSE
\doifreferencefoundelse { ¹ ..} { ² ..} { ³ ..} 1 REFERENCE 2 TRUE 3 FALSE

\doifrightpageelse {...} {...} 1 TRUE 2 FALSE
\doifrightpagefloatelse {...} {...} 1 TRUE 2 FALSE
\doifrighttoleftinboxelse . ¹ . {...} {...} 1 CSNAME NUMBER 2 TRUE 3 FALSE
\doifsamelinereferenceelse {...} {...} {...} 1 REFERENCE 2 TRUE 3 FALSE
\doifsamestring {...} {...} {...} 1 TEXT 2 TEXT 3 TRUE
\doifsamestringelse {...} {...} {...} {...} 1 TEXT 2 TEXT 3 TRUE 4 FALSE
\doifsetups {...} {...} 1 NAME 2 TRUE
\doifsetupselse {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifsomebackground {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifsomebackgroundelse {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifsomespaceelse {...} {...} {...} 1 TEXT 2 TRUE 3 FALSE
\doifsomething {...} {...} 1 TEXT 2 TRUE
\doifsomethingelse {...} {...} {...} 1 TEXT 2 TRUE 3 FALSE

<pre> \doifsometoks \.^.. {...} 1 CSNAME 2 TRUE </pre>
<pre> \doifsometokselse \.^.. {...} {...} 1 CSNAME 2 TRUE 3 FALSE </pre>
<pre> \doifstringinstringelse {...} {...} {...} {...} 1 TEXT 2 TEXT 3 TRUE 4 FALSE </pre>
<pre> \doifstructurelisthasnumberelse {...} {...} 1 TRUE 2 FALSE </pre>
<pre> \doifstructurelisthaspageelse {...} {...} 1 TRUE 2 FALSE </pre>
<pre> \doifsymboldefinedelse {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifsymbolsetelse {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doiftaggednoteonsamepageelse {...} {...} {...} {...} 1 NAME 2 NAME 3 TRUE 4 FALSE </pre>
<pre> \doiftext {...} {...} {...} 1 TEXT 2 TRUE 3 FALSE </pre>
<pre> \doiftextelse {...} {...} {...} 1 TEXT 2 TRUE 3 FALSE </pre>
<pre> \doiftextflowcollectorelse {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doiftextflowelse {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doiftopofpageelse {...} {...} 1 TRUE 2 FALSE </pre>

<pre> \doiftypingfileelse {...} {...} {...} 1 FILE 2 TRUE 3 FALSE </pre>
<pre> \doifundefined {...} {...} 1 NAME 2 TRUE </pre>
<pre> \doifundefinedcounter {...} {...} 1 NAME 2 TRUE </pre>
<pre> \doifundefinedelse {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifunknownfontfeature {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifurldefinedelse {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifvalue {...} {...} {...} 1 NAME 2 TEXT 3 TRUE </pre>
<pre> \doifvalueelse {...} {...} {...} {...} 1 NAME 2 TEXT 3 TRUE 4 FALSE </pre>
<pre> \doifvaluenothing {...} {...} 1 NAME 2 TRUE </pre>
<pre> \doifvaluenothingelse {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifvaluesomething {...} {...} 1 NAME 2 TRUE </pre>
<pre> \doifvariable {...} {...} {...} 1 NAME 2 KEY 3 TRUE </pre>
<pre> \doifvariableelse {...} {...} {...} {...} 1 NAME 2 KEY 3 TRUE 4 FALSE </pre>
<pre> \doindentation </pre>

<code>\dollar</code>
<code>\doloop {...}</code> <code>* BEFEHL</code>
<code>\doloopoverlist {...,¹...} {...²}</code> <code>1 TEXT</code> <code>2 BEFEHL</code>
<code>\donothing</code>
<code>\dontconvertfont</code>
<code>\dontleavehmode</code>
<code>\dontpermitspacesbetweenegroups</code>
<code>\dopositionaction {...}</code> <code>* NAME</code>
<code>\doprocesslocalsetups {...,*...}</code> <code>* NAME</code>
<code>\doquadrupleargument \¹... [...²] [...³] [...⁴] [...⁵]</code> <code>1 CSNAME</code> <code>2 TEXT</code> <code>3 TEXT</code> <code>4 TEXT</code> <code>5 TEXT</code>
<code>\doquadrupleempty \¹... [...²] [...³] [...⁴] [...⁵]</code> <code>1 CSNAME</code> <code>2 TEXT</code> <code>3 TEXT</code> <code>4 TEXT</code> <code>5 TEXT</code>
<code>\doquadruplegroupempty \¹... {...²} {...³} {...⁴} {...⁵}</code> <code>1 CSNAME</code> <code>2 TEXT</code> <code>3 TEXT</code> <code>4 TEXT</code> <code>5 TEXT</code>
<code>\doquintupleargument \¹... [...²] [...³] [...⁴] [...⁵] [...⁶]</code> <code>1 CSNAME</code> <code>2 TEXT</code> <code>3 TEXT</code> <code>4 TEXT</code> <code>5 TEXT</code> <code>6 TEXT</code>
<code>\doquintupleempty \¹... [...²] [...³] [...⁴] [...⁵] [...⁶]</code> <code>1 CSNAME</code> <code>2 TEXT</code> <code>3 TEXT</code> <code>4 TEXT</code> <code>5 TEXT</code> <code>6 TEXT</code>

$\backslash$ doquintuplegroupempty $\backslash^1...$ $\{\dots^2\}$ $\{\dots^3\}$ $\{\dots^4\}$ $\{\dots^5\}$ $\{\dots^6\}$ 1 CSNAME OPT OPT OPT OPT OPT 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT
$\backslash$ dorechecknextindentation
$\backslash$ dorecurse $\{\dots^1\}$ $\{\dots^2\}$ 1 NUMBER 2 BEFEHL
$\backslash$ dorepeatwithcommand $[\dots^1]$ $\backslash^2...$ 1 TEXT NUMBER*TEXT 2 CSNAME
$\backslash$ doreplacefeature $\{\dots^*,\dots\}$ * NAME
$\backslash$ doresetandaddfeature $\{\dots^*,\dots\}$ * NAME
$\backslash$ doresetattribute $\{\dots^*\}$ * NAME
$\backslash$ dorotatebox $\{\dots^1\}$ $\backslash^2...$ $\{\dots^3\}$ 1 NUMBER 2 CSNAME 3 CONTENT
$\backslash$ dosetattribute $\{\dots^1\}$ $\{\dots^2\}$ 1 NAME 2 NUMBER
$\backslash$ dosetleftskipadaption $\{\dots^*\}$ * da nu standard DIMENSION
$\backslash$ dosetrighskipadaption $\{\dots^*\}$ * da nu standard DIMENSION
$\backslash$ dosetupcheckedinterlinespace $\{\dots,\dots^{\neq},\dots\}$ * inherits: \seteazaspatiuinterliniar
$\backslash$ dosetupcheckedinterlinespace $\{\dots^*,\dots\}$ * on dezactivat reset auto mic mediu mare NUMBER DIMENSION
$\backslash$ dosetupcheckedinterlinespace $\{\dots^*\}$ * NAME
$\backslash$ doseventupleargument $\backslash^1...$ $[\dots^2]$ $[\dots^3]$ $[\dots^4]$ $[\dots^5]$ $[\dots^6]$ $[\dots^7]$ $[\dots^8]$ 1 CSNAME 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT 7 TEXT 8 TEXT

<code>\dotaggedplaceholder</code>
<code>\dotfill</code>
<code>\dotfskip {...}</code> <code>* DIMENSION</code>
<code>\dotoks *...</code> <code>* CSNAME</code>
<code>\dotripleargument \.^1. [.^2.] [.^3.] [.^4.]</code> <code>1 CSNAME</code> <code>2 TEXT</code> <code>3 TEXT</code> <code>4 TEXT</code>
<code>\dotripleargumentwithset \.^1. [...,^2,...] [.^3.] [.^4.]</code> <code>1 CSNAME</code> <code>2 TEXT</code> <code>3 TEXT</code> <code>4 TEXT</code>
<code>\dotripleempty \.^1. [.^2.] [.^3.] [.^4.]</code> <code>1 CSNAME</code> <code>2 TEXT</code> <code>3 TEXT</code> <code>4 TEXT</code>
<code>\dotripleemptywithset \.^1. [...,^2,...] [.^3.] [.^4.]</code> <code>1 CSNAME</code> <code>2 TEXT</code> <code>3 TEXT</code> <code>4 TEXT</code>
<code>\dotriplegroupempty \.^1. {.^2.} {.^3.} {.^4.}</code> <code>1 CSNAME</code> <code>2 TEXT</code> <code>3 TEXT</code> <code>4 TEXT</code>
<code>\doublebond</code>
<code>\dousecurrentlanguageparameter</code>
<code>\douselanguageparameter *...</code> <code>* CSNAME</code>
<code>\dowith {...,^1,...} {.^2.}</code> <code>1 BEFEHL</code> <code>2 BEFEHL</code>
<code>\dowithminmaxrangeslice {.^1.} {.^2.} {.^3.} {.^4.} {...,^5,...}</code> <code>1 NUMMER</code> <code>2 NUMMER</code> <code>3 NUMMER</code> <code>4 NUMMER</code> <code>5 NUMMER</code>
<code>\dowithnextbox {.^1.} \.^2. {.^3.}</code> <code>1 BEFEHL</code> <code>2 CSNAME</code> <code>3 CONTENT</code>

`\dowithnextboxcontent` $\{\dots\}^1$ $\{\dots\}^2$ $\backslash\dots^3$ $\{\dots\}^4$

1	BEFEHL
2	BEFEHL
3	CSNAME
4	CONTENT

$$\backslash\mathrm{dowithnextboxcontentcs} \quad \backslash\mathrm{...}^1 \quad \backslash\mathrm{...}^2 \quad \backslash\mathrm{...}^3 \quad \{\mathrm{...}\}^4$$

```

1  CSNAME
2  CSNAME
3  CSNAME
4  CONTENT

```

`\dowithnextboxcs` $\overset{1}{\dots}$ $\overset{2}{\dots}$ $\{\overset{3}{\dots}\}$

```

1  CSNAME
2  CSNAME
3  CONTENT

```

`\dowithpargument` `\.*...`

* CSNAME

$$\backslash\mathrm{dowithrange} \quad \{\dots,\dots\}^1 \quad \backslash\dots^2$$

```

1  NUMMER NUMMER:NUMMER
2  CSNAME

```

`\dowithwargument` `\.*..`

* CSNAME

`\dpofstring` `{...}`

* TEXT

`\drawbalancepoints` `[..,..*=..,..]`

```
*  dx      = DIMENSION      OPT
   dy      = DIMENSION
   sx      = DIMENSION
   sy      = DIMENSION
   grosimerigla = DIMENSION
```

`\drawbreakpoints` $[..,..*=..,..]$

```
*      dx      = DIMENSION      OPT
      dy      = DIMENSION
      sx      = DIMENSION
      sy      = DIMENSION
      grosimerigla = DIMENSION
```

`\dreapta` $\dots^*$

```
* \} \} \} \} \egroup \rparent \rparentthesis " \rparen " \rbracket \rbrack " \rbrace \rceil \rceil \rceil \rfloor
\urcorner \lrcorner \rmoustache \rrbracket \rangle \rangle \rangle \rgroup \vert \singleverticalbar \doubleverticalbar
\tripleverticalbar \rvert \rVert \rointerval \rlointerval CHARACTER
```

\dummydigit

`\dummysparameter` `{...}`

* KEY

$$\backslash\mathrm{dute}\quad\{\dots\}^1\quad[\dots]^2$$

1 CONTENT
2 REFERENCE

`\dutebox` $\{...\}^1$ $[...]^{2.}$

1 CONTENT
2 REFERENCE

\duetepagina {...} [...] 1 TEXT 2 REFERENCE
\ETEX
\EveryLine {...} * BEFEHL
\EveryPar {...} * BEFEHL
\ecran [...,*,...] * inherits: \pagina ^{OPT}
\edefconvertedargument \ ¹ ... {...} ² 1 CSNAME 2 TEXT
\efcmaxheight {...} * NAME
\efcmaxwidth {...} * NAME
\efcminheight {...} * NAME
\efcminwidth {...} * NAME
\efcparameter {...} ¹ {...} ² 1 NAME 2 KEY
\effect [...] ¹ {...} ² 1 intern extern ambele normal ascuns clip dilatat NAME 2 CONTENT
\elapsedseconds
\elapsedsteptime
\elapsedtime
\element [...,*,...] * REFERENCE ^{OPT}
\em
\emphasisboldface
\emphasistypeface
\emphasize

<code>\emptycolumnset</code> [...,*=...,...] * latime = DIMENSION inalttime = DIMENSION c = NUMMER r = NUMMER metoda = aici fixat sus subsol tblr lrtb tblr rltb btlr lrbt btrl rlbt fxtb fxbt optiune = pagina nsus = NUMMER njos = NUMMER
<code>\emptyhangrangestep</code>
<code>\emptylines</code> [...] * NUMMER OPT
<code>\emspace</code>
<code>\enableasciimode</code>
<code>\enabledelimiter</code>
<code>\enabledirectives</code> [...,*;...] * NAME
<code>\enableexperiments</code> [...,*;...] * NAME
<code>\enablefiller</code>
<code>\enablemathautofencing</code>
<code>\enablemathautonumbers</code>
<code>\enablemathautospaceing</code>
<code>\enablemathpunctuation</code>
<code>\enablemathrules</code>
<code>\enablemode</code> [...,*;...] * NAME
<code>\enableoutputstream</code> [...] * NAME
<code>\enableparpositions</code>
<code>\enableregime</code> [...] * cp1250 cp1251 cp1252 cp1253 cp1254 cp1255 cp1256 cp1257 cp1258 8859-1 8859-2 8859-3 8859-4 8859-9 8859-10 8859-13 8859-14 8859-15 8859-16 utf windows-1250 windows-1251 windows-1252 windows-1253 windows-1254 windows-1255 windows-1256 windows-1257 windows-1258 il1 il2 il3 il4 il5 il6 il7 il8 il9 il10 iso-8859-1 iso-8859-2 iso-8859-3 iso-8859-4 iso-8859-9 iso-8859-10 iso-8859-13 iso-8859-14 iso-8859-15 iso-8859-16 latin1 latin2 latin3 latin4 latin5 latin6 latin7 latin8 latin9 latin10 utf-8 utf8 windows
<code>\enabletrackers</code> [...,*;...] * NAME
<code>\enskip</code>

<code>\enspace</code>
<code>\ENUMERARE [...¹,...] {...²} ...³ \par</code> 1 REFERENCE OPT OPT 2 TEXT 3 CONTENT
<code>\env {...}</code> * KEY
<code>\envvar {...¹} {...²}</code> 1 KEY 2 BEFEHL
<code>\epos {...}</code> * NAME
<code>\equaldigits {...}</code> * TEXT
<code>\eTeX</code>
<code>\ETICHETA [...¹,...] {...²}</code> 1 REFERENCE OPT OPT 2 TEXT
<code>\everydefineCOMANDA</code>
<code>\everypresetCOMANDA</code>
<code>\everysetupCOMANDA</code>
<code>\everysetupCOMANDAroot</code>
<code>\everyswitchCOMANDA</code>
<code>\executeifdefined {...¹} {...²}</code> 1 NAME 2 BEFEHL
<code>\exitloop</code>
<code>\exitloopnow</code>
<code>\expandcheckedcsname \... {...²} {...³}</code> 1 CSNAME 2 KEY 3 TEXT
<code>\expanded {...}</code> * CONTENT
<code>\expandeddoif {...¹} {...²} {...³}</code> 1 CONTENT 2 CONTENT 3 TRUE

<code>\expandeddoifelse {¹...} {²...} {³...} {⁴...}</code> 1 CONTENT 2 CONTENT 3 TRUE 4 FALSE
<code>\expandeddoifnot {¹...} {²...} {³...}</code> 1 CONTENT 2 CONTENT 3 TRUE
<code>\expandfontsynonym \¹... {²...}</code> 1 CSNAME 2 NAME
<code>\expdoif {¹...} {²...} {³...}</code> 1 CONTENT 2 CONTENT 3 TRUE
<code>\expdoifcommonelse {¹...,...} {²...,...} {³...} {⁴...}</code> 1 TEXT 2 TEXT 3 TRUE 4 FALSE
<code>\expdoifelse {¹...} {²...} {³...} {⁴...}</code> 1 CONTENT 2 CONTENT 3 TRUE 4 FALSE
<code>\expdoifelsecommon {¹...,...} {²...,...} {³...} {⁴...}</code> 1 TEXT 2 TEXT 3 TRUE 4 FALSE
<code>\expdoifelseinset {¹...} {²...,...} {³...} {⁴...}</code> 1 TEXT 2 TEXT 3 TRUE 4 FALSE
<code>\expdoifinsetelse {¹...} {²...,...} {³...} {⁴...}</code> 1 TEXT 2 TEXT 3 TRUE 4 FALSE
<code>\expdoifnot {¹...} {²...} {³...}</code> 1 CONTENT 2 CONTENT 3 TRUE
<code>\externalfigurecollectionmaxheight {[*]...}</code> * NAME
<code>\externalfigurecollectionmaxwidth {[*]...}</code> * NAME
<code>\externalfigurecollectionminheight {[*]...}</code> * NAME

<code>\externalfigurecollectionminwidth {...}</code> * NAME
<code>\externalfigurecollectionparameter {...} {...}</code> 1 NAME 2 KEY
<code>\F {...}</code> * + - = * NUMBER
<code>\fakebox ...</code> * CSNAME NUMBER
<code>\fakeleftdelimiter</code>
<code>\fakerrightdelimiter</code>
<code>\faradimensiune {...}</code> * CONTENT
<code>\faraliniiantetsisubsol</code>
<code>\faraliniisussijos</code>
<code>\faraspatiu</code>
<code>\faraspatiualb</code>
<code>\fastdecrement \...</code> * CSNAME
<code>\fastincrement \...</code> * CSNAME
<code>\fastlocalframed [...] [...,²...,³...] {...}</code> 1 NAME 2 inherits: \seteazainconjurat 3 CONTENT
<code>\fastloopfinal</code>
<code>\fastloopindex</code>
<code>\fastscale {...} {...}</code> 1 NUMBER 2 CONTENT
<code>\fastsetup {...}</code> * NAME
<code>\fastsetupwithargument {...} {...}</code> 1 NAME 2 CONTENT
<code>\fastsetupwithargumentswapped {...} {...}</code> 1 CONTENT 2 NAME

<pre> \fastswitchtobodyfont {...} * x xx mic mare script scriptscript </pre>
<pre> \fastsxsy {...}^{.1.} {...}^{.2.} {...}^{.3.} 1 NUMMER 2 NUMMER 3 CONTENT </pre>
<pre> \feature [...]^{.1.} [...]^{.2.},... 1 + - = ! > < more less nou reset implicit old local 2 NAME </pre>
<pre> \feature {...}^{.1.} {...}^{.2.},... 1 + - = ! > < more less nou reset implicit old local 2 NAME </pre>
<pre> \fenced [...]^{.1.} [...]^{.2.},...^{.3.} 1 cases sesac tekcarb parenthesis bracket brace bar doublebar triplebar angle doubleangle solidus ceiling floor moustache uppercorner lowercorner group openbracket nothing mirroredparenthesis mirroredbracket mirroredbrace mirroredbar mirroreddoublebar mirroredtriplebar mirroredangle mirroreddoubleangle mirroredsolidus mirroredceiling mirroredfloor mirroredmoustache mirroreduppercorner mirroredlowercorner mirroredgroup mirroredopenbracket mirrorednothing interval openinterval closedinterval leftopeninterval rightopeninterval varopeninterval varleftopeninterval varrightopeninterval integerinterval abs innerproduct integerpart norm set sequence tuple NAME 2 inherits: \setupmathfences 3 CONTENT </pre>
<pre> \fenced [...]^{.1.} [...]^{.2.},...^{.3.} {...}^{.4.} 1 tupanddownarrows tupdownarrows tdownuparrows tuparrow tdownarrow NAME 2 inherits: \setupmathfences 3 CONTENT 4 CONTENT </pre>
<pre> \FENCE [...]^{.1.},...^{.2.} {...} 1 inherits: \setupmathfences 2 CONTENT instances: parenthesis bracket brace ceiling floor interval openinterval closedinterval leftopeninterval rightopeninterval varopeninterval varleftopeninterval varrightopeninterval integerinterval abs innerproduct integerpart norm set sequence tuple </pre>
<pre> \abs [...]^{.1.},...^{.2.} 1 inherits: \setupmathfences 2 CONTENT </pre>
<pre> \FENCE [...]^{.1.},...^{.2.} {...}^{.3.} 1 inherits: \setupmathfences 2 CONTENT 3 CONTENT </pre>
<pre> \brace [...]^{.1.},...^{.2.} {...} 1 inherits: \setupmathfences 2 CONTENT </pre>
<pre> \bracket [...]^{.1.},...^{.2.} {...} 1 inherits: \setupmathfences 2 CONTENT </pre>
<pre> \ceiling [...]^{.1.},...^{.2.} {...} 1 inherits: \setupmathfences 2 CONTENT </pre>
<pre> \closedinterval [...]^{.1.},...^{.2.} {...} 1 inherits: \setupmathfences 2 CONTENT </pre>

$\backslash\text{floor}$ $[...,\dots,\frac{1}{2},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathfences}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{innerproduct}$ $[...,\dots,\frac{1}{2},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathfences}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{integerinterval}$ $[...,\dots,\frac{1}{2},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathfences}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{integerpart}$ $[...,\dots,\frac{1}{2},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathfences}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{interval}$ $[...,\dots,\frac{1}{2},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathfences}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{leftopeninterval}$ $[...,\dots,\frac{1}{2},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathfences}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{norm}$ $[...,\dots,\frac{1}{2},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathfences}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{openinterval}$ $[...,\dots,\frac{1}{2},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathfences}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{parenthesis}$ $[...,\dots,\frac{1}{2},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathfences}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{rightopeninterval}$ $[...,\dots,\frac{1}{2},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathfences}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{sequence}$ $[...,\dots,\frac{1}{2},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathfences}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{set}$ $[...,\dots,\frac{1}{2},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathfences}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{tuple}$ $[...,\dots,\frac{1}{2},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathfences}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{varleftopeninterval}$ $[...,\dots,\frac{1}{2},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathfences}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{varopeninterval}$ $[...,\dots,\frac{1}{2},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathfences}^{\text{OPT}}$ 2 CONTENT

$\backslash\text{varrightopeninterval}$ $[...,\overset{1}{=}\dots]$ $\{\overset{2}{\dots}\}$ 1 inherits: $\backslash\text{setupmathfences}$ OPT 2 CONTENT
$\backslash\text{fetchallmarkings}$ $[\overset{1}{\dots}]$ $[\overset{2}{\dots}]$ 1 BESCHRIFTUNG 2 pagina NAME NUMMER
$\backslash\text{fetchallmarks}$ $[\overset{*}{\dots}]$ * BESCHRIFTUNG
$\backslash\text{fetchmark}$ $[\overset{1}{\dots}]$ $[\overset{2}{\dots}]$ 1 BESCHRIFTUNG OPT 2 primul ultim curent precedent urmatorul sus subsol implicit ambele tot first:nocheck last:nocheck previous:nocheck next:nocheck top:nocheck bottom:nocheck
$\backslash\text{fetchmarking}$ $[\overset{1}{\dots}]$ $[\overset{2}{\dots}]$ $[\overset{3}{\dots}]$ 1 BESCHRIFTUNG 2 pagina NAME NUMMER 3 primul ultim curent precedent urmatorul sus subsol implicit ambele tot first:nocheck last:nocheck previous:nocheck next:nocheck top:nocheck bottom:nocheck
$\backslash\text{fetchonemark}$ $[\overset{1}{\dots}]$ $[\overset{2}{\dots}]$ 1 BESCHRIFTUNG OPT 2 primul ultim curent precedent urmatorul sus subsol implicit ambele tot first:nocheck last:nocheck previous:nocheck next:nocheck top:nocheck bottom:nocheck
$\backslash\text{fetchonemarking}$ $[\overset{1}{\dots}]$ $[\overset{2}{\dots}]$ $[\overset{3}{\dots}]$ 1 BESCHRIFTUNG 2 pagina NAME NUMMER 3 primul ultim curent precedent urmatorul sus subsol implicit ambele tot first:nocheck last:nocheck previous:nocheck next:nocheck top:nocheck bottom:nocheck
$\backslash\text{fetchruntinecommand}$ $\backslash\overset{1}{\dots}$ $\{\overset{2}{\dots}\}$ 1 CSNAME 2 FILE
$\backslash\text{fetchtwomarkings}$ $[\overset{1}{\dots}]$ $[\overset{2}{\dots}]$ 1 BESCHRIFTUNG 2 pagina NAME NUMMER
$\backslash\text{fetchtwomarks}$ $[\overset{*}{\dots}]$ * BESCHRIFTUNG
$\backslash\text{fieldbody}$ $[\overset{1}{\dots}]$ $[...,\overset{2}{=}\dots]$ 1 NAME OPT 2 inherits: $\backslash\text{setupfieldbody}$
$\backslash\text{fifthoffivearguments}$ $\{\overset{1}{\dots}\}$ $\{\overset{2}{\dots}\}$ $\{\overset{3}{\dots}\}$ $\{\overset{4}{\dots}\}$ $\{\overset{5}{\dots}\}$ 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT
$\backslash\text{fifthofsixarguments}$ $\{\overset{1}{\dots}\}$ $\{\overset{2}{\dots}\}$ $\{\overset{3}{\dots}\}$ $\{\overset{4}{\dots}\}$ $\{\overset{5}{\dots}\}$ $\{\overset{6}{\dots}\}$ 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT

<pre> \filler [...] * sym simbol rigla latime spatiu NAME </pre>
<pre> \fillupto [...] {...} 1 sym simbol rigla latime spatiu NAME 2 TEXT </pre>
<pre> \filterfromnext {...} {...} {...} {...} {...} {...} {...} 1 NUMBER 2 NUMBER 3 CONTENT 4 CONTENT 5 CONTENT 6 CONTENT 7 CONTENT </pre>
<pre> \filterfromvalue {...} {...} {...} 1 NAME 2 NUMMER 3 NUMMER </pre>
<pre> \filterlist {...} {...} 1 NODE 2 LPATH </pre>
<pre> \filterpages [...] [...,²...] [...,³...,...] 1 FILE 2 par impar NUMMER NUMMER:NUMMER 3 latime = DIMENSION n = NUMMER category = NAME alternativ = a b implicit pagina </pre>
<pre> \filterreference {...} * implicit text titlu numar pagina realpage </pre>
<pre> \finishregisterentry [...] [...,²...,...] [...,³...,...] 1 NAME 2 eticheta = NAME keys = TEXT PROCESSOR->TEXT entries = TEXT PROCESSOR->TEXT alternativ = TEXT 3 KEY = VALUE </pre>
<pre> \firdepar </pre>
<pre> \firstcharacter </pre>
<pre> \firstcounter [...¹] [...²] 1 NAME 2 NUMMER </pre>
<pre> \firstcountervalue [...[*]] * NAME </pre>
<pre> \firstinlist [...[*],...] * BEFEHL </pre>
<pre> \firstoffivearguments {...} {...} {...} {...} {...} 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT </pre>

\firstoffourarguments {...} {...} {...} {...} 1 TEXT 2 TEXT 3 TEXT 4 TEXT
\firstofoneargument {...} * TEXT
\firstofoneunexpanded {...} * TEXT
\firstofsixarguments {...} {...} {...} {...} {...} {...} 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT
\firstofthreearguments {...} {...} {...} 1 TEXT 2 TEXT 3 TEXT
\firstofthreeunexpanded {...} {...} {...} 1 TEXT 2 TEXT 3 TEXT
\firstoftwoarguments {...} {...} 1 TEXT 2 TEXT
\firstoftwounexpanded {...} {...} 1 TEXT 2 TEXT
\firstrealpage
\firstrealpagenumber
\firstsubcountervalue [... ¹ ...] [... ²] 1 NAME 2 NUMBER
\firstsubpagenumber
\firstuserpage
\firstuserpagenumber
\fitfieldframed [... ¹ ...] {... ² } 1 inherits: \seteazainconjura ^{PT} 2 CONTENT
\fittopbaselinegrid {...} * CONTENT
\flag {...} * NAME

\floatuserdataparameter {...}
* KEY
\flushallmarginblocks [...]
* DIMENSION OPT
\flushbox {...} {...}
1 NAME
2 NAME
\flushboxregister ...
* CSNAME NUMMER
\flushcollector [...]
* NAME
\flushcolumnset
\flushedrightlastline
\flushinitial
\flushlayer [...]
* NAME
\flushlocalfloats
\flushnextbox
\flushnoterange [...]
* NAME
\flushnotes
\flushoutputstream [...]
* NAME
\flushpageblocks [...;...]
* NAME
\flushshapebox
\flushsidefloats
\flushsidefloatsafterpar
\flushsubcolumnsets [...]
* spread OPT
\flushtextflow {...}
* NAME
\flushtokens [...]
* NAME

\flushtoks * * CSNAME
\folosestebloc [..., ¹ ...] [..., ² ...] [..., ³ ...,...] 1 NAME 2 NAME 3 criteriu = text ABSCHNITT
\folosestedirector [...,*...] * PATH
\folosestedocumentextern [... ¹] [... ²] [... ³] 1 NAME 2 FILE 3 TEXT
\folosestefiguraexterna [... ¹] [... ²] [... ³] [..., ⁴ ...,...] 1 NAME 2 FILE 3 NAME 4 inherits: \setupexternalfigure
\folosestemodul [... ¹] [..., ² ...] [..., ³ ...,...] 1 m p s x t 2 FILE 3 KEY = VALUE
\folosestescriptJS [... ¹] [..., ² ...] 1 FILE 2 NAME
\folosestesimboluri [...*] * FILE
\folosesteURL [... ¹] [... ²] [... ³] [... ⁴] 1 NAME 2 URL 3 FILE 4 TEXT
\folosesteurl [... ¹] [... ²] [... ³] [... ⁴] 1 NAME 2 URL 3 FILE 4 TEXT
\fontalternative
\fontbody
\fontchar {...*} * NAME
\fontcharbyindex {...*} * NUMMER
\fontclass
\fontclassname {... ¹ } {... ² } 1 NAME 2 FONT

<code>\fontface</code>
<code>\fontfeaturelist [...]¹ [...]²</code> 1 NAME 2 TEXT
<code>\fontsize</code>
<code>\fontstyle</code>
<code>\footnotetext [...]¹ {...}²</code> 1 REFERENCE OPT 2 TEXT
<code>\footnotetext [...,...[*],...]</code> * titlu = TEXT semncarte = TEXT lista = TEXT referinta = REFERENCE referencetext = TEXT
<code>\forcecharacterstripping</code>
<code>\forcelocalfloats</code>
<code>\forgeteverypar</code>
<code>\forgetinitial</code>
<code>\forgetparagraphfreezing</code>
<code>\forgetparameters [...]¹ [...,...²,...]</code> 1 TEXT 2 KEY = VALUE
<code>\forgetparskip</code>
<code>\forgetparwrapper</code>
<code>\forgetragged</code>
<code>\forgetsidefloats</code>
<code>\forgettagging</code>
<code>\formula [...]¹ {...}²</code> 1 impachetat tigh ^{PT} centru adancime linie jumatatelinie -linie -jumatatelinie incadrat mic DIMENSION 2 CONTENT
<code>\foundbox {...}¹ {...}²</code> 1 NAME 2 NAME
<code>\fourthoffivearguments {...}¹ {...}² {...}³ {...}⁴ {...}⁵</code> 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT

`\fourthoffourarguments` $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ $\{.^4.\}$

1 TEXT
2 TEXT
3 TEXT
4 TEXT

`\fourthofsixarguments` $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ $\{.^4.\}$ $\{.^5.\}$ $\{.^6.\}$

1 TEXT
2 TEXT
3 TEXT
4 TEXT
5 TEXT
6 TEXT

`\FRACTION` $[.^1.\dots]$ $\{.^2.\}$ $\{.^3.\}$

1 inherits: `\setupmathfractions`
2 CONTENT
3 CONTENT

instances: `xfrac` `xxfrac` `frac` `tfrac` `sfrac` `dfrac` `binom` `dbinom` `tbinom` `cfrac` `splitfrac`
`splitdfrac` `vfrac` `relfraction` `bartext` `leftarrowtext` `rightarrowtext` `twoheadleftarrowtext`
`twoheadrightarrowtext` `reltext` `equaltext` `mapstotext` `hookleftarrowtext` `hookrightarrowtext`
`leftharpoonupdowntext` `leftharpoonuptext` `rightharpoonupdowntext` `rightharpoonuptext`
`rightoverleftarrowtext` `leftrightharpoonstext` `rightleftharpoonstext` `triplereltext`
`leftrightarrowtext` `rightleftarrowtext` `Leftarrowtext` `Rightarrowtext` `Leftrightarrowtext`
`Rightrightarrowtext`

`\barttext` $[.^1.\dots]$ $\{.^2.\}$ $\{.^3.\}$

1 inherits: `\setupmathfractions`
2 CONTENT
3 CONTENT

`\binom` $[.^1.\dots]$ $\{.^2.\}$ $\{.^3.\}$

1 inherits: `\setupmathfractions`
2 CONTENT
3 CONTENT

`\cfrac` $[.^1.\dots]$ $\{.^2.\}$ $\{.^3.\}$

1 inherits: `\setupmathfractions`
2 CONTENT
3 CONTENT

`\dbinom` $[.^1.\dots]$ $\{.^2.\}$ $\{.^3.\}$

1 inherits: `\setupmathfractions`
2 CONTENT
3 CONTENT

`\dfrac` $[.^1.\dots]$ $\{.^2.\}$ $\{.^3.\}$

1 inherits: `\setupmathfractions`
2 CONTENT
3 CONTENT

`\equaltext` $[.^1.\dots]$ $\{.^2.\}$ $\{.^3.\}$

1 inherits: `\setupmathfractions`
2 CONTENT
3 CONTENT

`\frac` $[.^1.\dots]$ $\{.^2.\}$ $\{.^3.\}$

1 inherits: `\setupmathfractions`
2 CONTENT
3 CONTENT

`\hookrightarrowtext` $[.^1.\dots]$ $\{.^2.\}$ $\{.^3.\}$

1 inherits: `\setupmathfractions` ^{OPT}
2 CONTENT
3 CONTENT

$\hookrightarrow$ <code>\hookrightarrowtext</code> $[...,\overset{1}{=},...]$ $\{...\}$ $\{...\}$ 1 inherits: <code>\setupmathfractions</code> OPT 2 CONTENT 3 CONTENT
$\leftarrow$ <code>\Leftarrowtext</code> $[...,\overset{1}{=},...]$ $\{...\}$ $\{...\}$ 1 inherits: <code>\setupmathfractions</code> OPT 2 CONTENT 3 CONTENT
$\Leftrightarrow$ <code>\Leftrightarrowtext</code> $[...,\overset{1}{=},...]$ $\{...\}$ $\{...\}$ 1 inherits: <code>\setupmathfractions</code> OPT 2 CONTENT 3 CONTENT
$\leftarrow$ <code>\leftarrowtext</code> $[...,\overset{1}{=},...]$ $\{...\}$ $\{...\}$ 1 inherits: <code>\setupmathfractions</code> OPT 2 CONTENT 3 CONTENT
$\leftharpoonup$ <code>\leftharpoonupdowntext</code> $[...,\overset{1}{=},...]$ $\{...\}$ $\{...\}$ 1 inherits: <code>\setupmathfractions</code> OPT 2 CONTENT 3 CONTENT
$\leftharpoonup$ <code>\leftharpoonuptext</code> $[...,\overset{1}{=},...]$ $\{...\}$ $\{...\}$ 1 inherits: <code>\setupmathfractions</code> OPT 2 CONTENT 3 CONTENT
$\Leftrightarrow$ <code>\leftrightharpoonuptext</code> $[...,\overset{1}{=},...]$ $\{...\}$ $\{...\}$ 1 inherits: <code>\setupmathfractions</code> OPT 2 CONTENT 3 CONTENT
$\leftrightharpoonup$ <code>\leftrightharpoonupstext</code> $[...,\overset{1}{=},...]$ $\{...\}$ $\{...\}$ 1 inherits: <code>\setupmathfractions</code> OPT 2 CONTENT 3 CONTENT
$\mapsto$ <code>\mapstotext</code> $[...,\overset{1}{=},...]$ $\{...\}$ $\{...\}$ 1 inherits: <code>\setupmathfractions</code> OPT 2 CONTENT 3 CONTENT
$\rightarrow$ <code>\rightarrowtext</code> $[...,\overset{1}{=},...]$ $\{...\}$ $\{...\}$ 1 inherits: <code>\setupmathfractions</code> OPT 2 CONTENT 3 CONTENT
$\rightleftarrows$ <code>\Rightleftarrowtext</code> $[...,\overset{1}{=},...]$ $\{...\}$ $\{...\}$ 1 inherits: <code>\setupmathfractions</code> OPT 2 CONTENT 3 CONTENT
$\rightleftharpoons$ <code>\relfraction</code> $[...,\overset{1}{=},...]$ $\{...\}$ $\{...\}$ 1 inherits: <code>\setupmathfractions</code> OPT 2 CONTENT 3 CONTENT
$\reltext$ $[...,\overset{1}{=},...]$ $\{...\}$ $\{...\}$ 1 inherits: <code>\setupmathfractions</code> OPT 2 CONTENT 3 CONTENT

$\rightarrowtext$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfraction}$ 2 CONTENT 3 CONTENT
$\rightharpoonowdowntext$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}$ 2 CONTENT 3 CONTENT
$\rightharpoonouptext$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}$ 2 CONTENT 3 CONTENT
$\rightleftarrowtext$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}$ 2 CONTENT 3 CONTENT
$\rightleftharpoonostext$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}$ 2 CONTENT 3 CONTENT
$\rightoverleftarrowtext$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}$ 2 CONTENT 3 CONTENT
$\sfrac$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}$ 2 CONTENT 3 CONTENT
$\splitdfrac$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}$ 2 CONTENT 3 CONTENT
$\splitfrac$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}$ 2 CONTENT 3 CONTENT
$\tbinom$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}$ 2 CONTENT 3 CONTENT
$\tfrac$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}$ 2 CONTENT 3 CONTENT
$\triplereltext$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}$ 2 CONTENT 3 CONTENT
$\twoheadleftarrowtext$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}$ 2 CONTENT 3 CONTENT

$\twoheadrightarrow$ <pre> \twoheadrightarrowtext [...,\stackrel{1}{=}\dots] {...} {...} 1 inherits: \setupmathfractions 2 CONTENT 3 CONTENT </pre>
$\vfrac$ <pre> \vfrac [...,\stackrel{1}{=}\dots] {...} {...} 1 inherits: \setupmathfractions 2 CONTENT 3 CONTENT </pre>
$\xfrac$ <pre> \xfrac [...,\stackrel{1}{=}\dots] {...} {...} 1 inherits: \setupmathfractions 2 CONTENT 3 CONTENT </pre>
$\xxfrac$ <pre> \xxfrac [...,\stackrel{1}{=}\dots] {...} {...} 1 inherits: \setupmathfractions 2 CONTENT 3 CONTENT </pre>
$\framed$ <pre> \framed [...,\stackrel{1}{=}\dots] {...} 1 inherits: \seteazainconjurat 2 CONTENT </pre>
$\frameddimension$ <pre> \frameddimension {...} * KEY </pre>
$\FRAMEDMATH$ <pre> \FRAMEDMATH [...,\stackrel{1}{=}\dots] {...} 1 inherits: \seteazainconjurat 2 CONTENT instances: framedmath mathstrikeout mathcrossout </pre>
$\framedmath$ <pre> \framedmath [...,\stackrel{1}{=}\dots] {...} 1 inherits: \seteazainconjurat 2 CONTENT </pre>
$\mathcrossout$ <pre> \mathcrossout [...,\stackrel{1}{=}\dots] {...} 1 inherits: \seteazainconjurat 2 CONTENT </pre>
$\mathstrikeout$ <pre> \mathstrikeout [...,\stackrel{1}{=}\dots] {...} 1 inherits: \seteazainconjurat 2 CONTENT </pre>
$\framedparameter$ <pre> \framedparameter {...} * KEY </pre>
$\FRAMED$ <pre> \FRAMED [...,\stackrel{1}{=}\dots] {...} 1 inherits: \seteazainconjurat 2 CONTENT instances: unframed fitfieldframed potracebitmap </pre>
$\fitfieldframed$ <pre> \fitfieldframed [...,\stackrel{1}{=}\dots] {...} 1 inherits: \seteazainconjurat 2 CONTENT </pre>
$\potracebitmap$ <pre> \potracebitmap [...,\stackrel{1}{=}\dots] {...} 1 inherits: \seteazainconjurat 2 CONTENT </pre>

<code>\unframed [...¹...] {...²}</code> 1 inherits: \seteazaiHőonjurat 2 CONTENT
<code>\freezeaveragecharacterwidth</code>
<code>\freezedimenmacro \... \...</code> 1 CSNAME 2 CSNAME
<code>\freezemeasure [...¹] [...²]</code> 1 NAME 2 DIMENSION
<code>\freezeparagraphproperties</code>
<code>\frenchspacing</code>
<code>\fromlinenote [...¹] {...²}</code> 1 REFERENCE 2 TEXT
<code>\frozenhbox {...}</code> * CONTENT
<code>\frule ..[*].. \relax</code> * width _└ DIMENSION height _└ DIMENSION depth _└ DIMENSION radius _└ DIMENSION line _└ DIMENSION type _└ TEXT data _└ TEXT name _└ TEXT radius _└ DIMENSION corner _└ TEXT
<code>\fsp {...}</code> * CHARACTER
<code>\fundal {...}</code> * CONTENT
<code>\FUNDAL {...}</code> * CONTENT instances: fundal
<code>\GetPar</code>
<code>\GotoPar</code>
<code>\Greeknumerals {...}</code> * NUMMER
<code>\gdefconvertedargument \... {...²}</code> 1 CSNAME 2 TEXT
<code>\gdefconvertedcommand \... \...</code> 1 CSNAME 2 CSNAME
<code>\getboxfromcache {...¹} {...²} ...³.</code> 1 NAME 2 NUMMER TEXT 3 CSNAME NUMMER

\getboxllx *.. * CSNAME NUMBER
\getboxlly *.. * CSNAME NUMBER
\getbufferdata [..<] * BUFFER OPT
\getcommacommandsize [...,*...] * BEFEHL
\getcommalistsize [...,*...] * BEFEHL
\getdatavalue {...} * NAME
\getdayoftheweek {... ¹ } {... ² } {... ³ } 1 NUMBER 2 NUMBER 3 NUMBER
\getdayspermonth {... ¹ } {... ² } 1 NUMBER 2 NUMBER
\getdefinedbuffer [..<] * BUFFER
\getdocumentargument {...} * NAME
\getdocumentargumentdefault {... ¹ } {... ² } 1 NAME 2 TEXT
\getdocumentfilename {...} * NUMBER
\getdummyparameters [...,*...] * KEY = VALUE
\getemptyparameters [... ¹] [...,*... ² ...] 1 TEXT 2 KEY = VALUE
\geteparameters [... ¹] [...,*... ² ...] 1 TEXT 2 KEY = VALUE
\getexpandedparameters [... ¹] [...,*... ² ...] 1 TEXT 2 KEY = VALUE
\getfiguredimensions [... ¹] [...,*... ² ...] 1 FILE 2 inherits: \setupexternalfigure OPT

* TEXT

1	BEFEHL
2	NUMMER

1	BEFEHL
2	NUMMER

```

1  CSNAME
2  KEY  NUMMER

```

```

1  FONT
2  NUMMER CHARACTER

```

1 FONT
2 NUMMER CHARACTER

```

1  TEXT
2  KEY  =  VALUE

```

```
\getinlineuserdata
```

* NUMMER

\getlocalfloats

\getMPdata

\getMPdrawing

```

1  NAME                                OPT
2  inherits: \seteazainconjurat
3  CONTENT

```

```

1  NAME
2  NAME NUMMER

```

```

1  FONT
2  NAME

```

```

1  NUMMER
2  FONT
3  NAME

```

```

1  FONT
2  NAME

```

\getnaturaldimensions ..* * CSNAME NUMMER
\getnoflines {...} * DIMENSION
\getobject {...} {...} 1 NAME 2 NAME
\getobjectdimensions {...} {...} 1 NAME 2 NAME
\getobjectreference {...} {...} \... {...} 1 NAME 2 NAME 3 CSNAME 4 CONTENT
\getobjectreferencepage {...} {...} \... {...} 1 NAME 2 NAME 3 CSNAME 4 CONTENT
\getpaletsizes [...] * NAME
\getparameters [...] 1 TEXT 2 KEY = VALUE
\getparwrapper {...} * NAME
\getprivatechar {...} * NAME
\getprivateslot {...} * NAME
\getrandomcount \... {...} {...} 1 CSNAME 2 NUMMER 3 NUMMER
\getrandomdimen \... {...} {...} 1 CSNAME 2 DIMENSION 3 DIMENSION
\getrandomfloat \... {...} {...} 1 CSNAME 2 NUMMER 3 NUMMER
\getrandomnumber \... {...} {...} 1 CSNAME 2 NUMMER 3 NUMMER

\getrandomseed *.. * CSNAME
\getrawparameters [¹ ..] [..., ² .. 1 TEXT 2 KEY = VALUE
\getrawgparameters [¹ ..] [..., ² .. 1 TEXT 2 KEY = VALUE
\getrawnoflines {*.. * DIMENSION
\getrawparameters [¹ ..] [..., ² .. 1 TEXT 2 KEY = VALUE
\getrawxparameters [¹ ..] [..., ² .. 1 TEXT 2 KEY = VALUE
\getreference [¹ ..] [² .. 1 implicit text titlu numar pagina realpage 2 REFERENCE
\getreferenceentry {*.. * implicit text titlu numar pagina realpage
\getroundednoflines {*.. * DIMENSION
\getshapetext
\getsubstring { ¹ ..} { ² ..} { ³ .. 1 NUMMER 2 NUMMER 3 TEXT
\gettokenlist [*.. * NAME
\getuserdata
\getuvalue {*.. * NAME
\getvalue {*.. * NAME
\getvariable { ¹ ..} { ² .. 1 NAME 2 KEY
\getvariabledefault { ¹ ..} { ² ..} { ³ .. 1 NAME 2 KEY 3 BEFEHL

\getxparameters [¹ ...] [..., ² ...,...] 1 TEXT 2 KEY = VALUE
\globaldisablemode [...,*...] * NAME
\globalenablemode [...,*...] * NAME
\globalletempty *.. * CSNAME
\globalpopbox *.. * CSNAME NUMBER
\globalpopmacro *.. * CSNAME
\globalpreventmode [...,*...] * NAME
\globalprocesscommalist [¹ ...] \ ² .. 1 BEFEHL 2 CSNAME
\globalpushbox *.. * CSNAME NUMBER
\globalpushmacro *.. * CSNAME
\globalpushreferenceprefix {...} ... \globalpopreferenceprefix * + - TEXT
\globalswapcounts \ ¹ ... \ ² .. 1 CSNAME 2 CSNAME
\globalswapdimens \ ¹ ... \ ² .. 1 CSNAME 2 CSNAME
\globalswapmacros \ ¹ ... \ ² .. 1 CSNAME 2 CSNAME
\globalundefine {...} * NAME
\glyphfontfile {...} * FONT
\glyphscaled {...} * NUMMER
\gobbledoubleempty [¹ ...] [² ...] 1 TEXT OPT OPT 2 TEXT

<code>\gobbleeightarguments</code> <code>{...}</code> <code>{...}</code> <code>{...}</code> <code>{...}</code> <code>{...}</code> <code>{...}</code> <code>{...}</code> 1 CONTENT 2 CONTENT 3 CONTENT 4 CONTENT 5 CONTENT 6 CONTENT 7 CONTENT 8 CONTENT
<code>\gobblefivearguments</code> <code>{...}</code> <code>{...}</code> <code>{...}</code> <code>{...}</code> <code>{...}</code> 1 CONTENT 2 CONTENT 3 CONTENT 4 CONTENT 5 CONTENT
<code>\gobblefiveoptionals</code> <code>[...]</code> <code>[...]</code> <code>[...]</code> <code>[...]</code> <code>[...]</code> 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT
<code>\gobblefourarguments</code> <code>{...}</code> <code>{...}</code> <code>{...}</code> <code>{...}</code> 1 CONTENT 2 CONTENT 3 CONTENT 4 CONTENT
<code>\gobblefouroptionals</code> <code>[...]</code> <code>[...]</code> <code>[...]</code> <code>[...]</code> 1 TEXT 2 TEXT 3 TEXT 4 TEXT
<code>\gobbleninearguments</code> <code>{...}</code> <code>{...}</code> <code>{...}</code> <code>{...}</code> <code>{...}</code> <code>{...}</code> <code>{...}</code> <code>{...}</code> <code>{...}</code> 1 CONTENT 2 CONTENT 3 CONTENT 4 CONTENT 5 CONTENT 6 CONTENT 7 CONTENT 8 CONTENT 9 CONTENT
<code>\gobbleoneargument</code> <code>{...}</code> * CONTENT
<code>\gobbleoneoptional</code> <code>[...]</code> * TEXT
<code>\gobblesevenarguments</code> <code>{...}</code> <code>{...}</code> <code>{...}</code> <code>{...}</code> <code>{...}</code> <code>{...}</code> <code>{...}</code> 1 CONTENT 2 CONTENT 3 CONTENT 4 CONTENT 5 CONTENT 6 CONTENT 7 CONTENT
<code>\gobblesingleempty</code> <code>[...]</code> * TEXT OPT

<code>\gobblesixarguments</code> <code>{¹...}</code> <code>{²...}</code> <code>{³...}</code> <code>{⁴...}</code> <code>{⁵...}</code> <code>{⁶...}</code> 1 CONTENT 2 CONTENT 3 CONTENT 4 CONTENT 5 CONTENT 6 CONTENT
<code>\gobblespacetokens</code>
<code>\gobbletenarguments</code> <code>{¹...}</code> <code>{²...}</code> <code>{³...}</code> <code>{⁴...}</code> <code>{⁵...}</code> <code>{⁶...}</code> <code>{⁷...}</code> <code>{⁸...}</code> <code>{⁹...}</code> <code>{¹⁰...}</code> 1 CONTENT 2 CONTENT 3 CONTENT 4 CONTENT 5 CONTENT 6 CONTENT 7 CONTENT 8 CONTENT 9 CONTENT 10 CONTENT
<code>\gobblethreearguments</code> <code>{¹...}</code> <code>{²...}</code> <code>{³...}</code> 1 CONTENT 2 CONTENT 3 CONTENT
<code>\gobblethreeoptionals</code> <code>[¹...]</code> <code>[²...]</code> <code>[³...]</code> 1 TEXT 2 TEXT 3 TEXT
<code>\gobbletwoarguments</code> <code>{¹...}</code> <code>{²...}</code> 1 CONTENT 2 CONTENT
<code>\gobbletwooptionals</code> <code>[¹...]</code> <code>[²...]</code> 1 TEXT 2 TEXT
<code>\gobbleuntil</code> <code>*...</code> * CSNAME
<code>\gobbleuntilandfinalize</code> <code>*...</code> * CSNAME
<code>\gobbleuntilrelax</code> <code>*... \relax</code> * CONTENT
<code>\goodbreak</code>
<code>\grabbufferdata</code> <code>[¹...]</code> <code>[²...]</code> <code>[³...]</code> <code>[⁴...]</code> 1 CATEGORY OPT 2 NAME 3 NAME 4 NAME
<code>\grabbufferdatadirect</code> <code>{¹...}</code> <code>{²...}</code> <code>{³...}</code> 1 NAME 2 NAME 3 NAME

1	NAME
2	CSNAME

```

1  NAME                                OPT
2  s m a x h d o e c r t b T B DIMENSION NUMMER COLOR

```

* COLOR

1	TEXT
2	TEXT
3	CSNAME
4	CSNAME

* NUMMER.

```
* inherits: \baseOPTgrid
```

1	BEFEHL
2	BEFEHL

1	CSNAME
2	CSNAME

```

1 CSNAME NUMMER
2 DIMENSION

```

```

1 CSNAME NUMMER
2 DIMENSION

```

* NUMMER.

* NUMMER.

\halflinestrut

* CONTENT

129

\handletokens ¹ ... \with \ ² ... 1 TEXT 2 CSNAME
\hash
\hboxofvbox [*] ... * CSNAME NUMBER
\hboxreference [... ¹ ,...] {... ² .} 1 REFERENCE 2 CONTENT
\hboxBOX {... [*] .} * CONTENT
\hbreak
\hcontainer ¹ ... {... ² .} 1 TEXT OPT 2 CONTENT
\hdofstring {... [*] .} * TEXT
\headhbox ¹ ... {... ² .} 1 TEXT OPT 2 CONTENT
\headnumbercontent
\headnumberdistance
\headnumberwidth
\headreferenceattributes
\headsetupspacing
\headtextcontent
\headtextdistance
\headtextwidth
\headvbox ¹ ... {... ² .} 1 TEXT OPT 2 CONTENT
\headwidth
\hebrewnumerals {... [*] .} * NUMBER
\heightanddepthofstring {... [*] .} * TEXT

\heightofstring {.*} * TEXT
\heightspanningtext {...} {...} {...} 1 TEXT 2 DIMENSION 3 FONT
\HELP [...] {...} {...} 1 REFERENCE ^{PT} 2 TEXT 3 TEXT instances: helptext
\helptext [...] {...} {...} 1 REFERENCE ^{OPT} 2 TEXT 3 TEXT
\hexnumber {...} * NUMMER
\hexstringtonumber {...} * NUMMER
\hglue ... * DIMENSION
\hiddencitation [...] * REFERENCE
\hiddencite [...] * REFERENCE
\hidestacking [...;...] * NUMMER
\highlight [...] {...} 1 NAME 2 TEXT
\HIGHLIGHT {...} * TEXT
\highordinalstr {...} * TEXT
\hilo [...] {...} {...} 1 stanga dreapta ^{OPT} 2 CONTENT 3 CONTENT
\himilo {...} {...} {...} 1 CONTENT 2 CONTENT 3 CONTENT
\hl [...] * NUMMER ^{OPT}

`\horizontalbox` $[...]$ $[...,\dots^2...]$ $\{...\}$

`\horizontalgrowingbar` $[..,..*=..,..]$

`\horizontalpositionbar` $[...,*=...]$

\hpackbox

\hpackedbox

$$\backslash\mathrm{hphantom}\quad\{.\!.\!.\}$$
$$\backslash\mathrm{hpos} \quad \{.\overset{1}{.}\} \quad \{.\overset{2}{.}\}$$
$$\frac{\{...\}^1}{\{...\}^2}$$
$$\backslash\mathrm{hsmash}\quad\{.\overset{*}{.}.\}$$

\hsmashbox ...*

$$\backslash\mathrm{hsmashed}\quad\{.\ldots\}$$

```

\hspace{1cm} [1] [2]
1 NAME OPT OPT
2 mic mediu mare normal implicit niciunul .5 1 2 3 speech minicitat interquotation citat sentence intersentence
final NAME

```

`\htdpofstring` `{...}`

```
\htofstring {...}
```

\hyphen

`\hyphenatedcoloredword` `{...}`

$$\backslash \text{hyphenateddigits} \quad [\overset{1}{.}] \quad \{ \overset{2}{.} . . \}$$

`\hyphenatedfile` `{...}`

<code>\hyphenatedfilename {...}</code> * TEXT
<code>\hyphenatedhbox {...}</code> * CONTENT
<code>\hyphenatedpar {...}</code> * TEXT
<code>\hyphenatedurl {...}</code> * TEXT
<code>\hyphenatedword {...}</code> * TEXT
<code>\INRSTEX</code>
<code>\ibox {...}</code> * CONTENT
<code>\idxfromluatable \¹... \²...</code> 1 CSNAME 2 NUMMER
<code>\ifassignment \¹... \else \²... \fi</code> 1 TRUE 2 FALSE
<code>\ifcommandhandler \¹... {²...} \³... \else \⁴... \fi</code> 1 CSNAME 2 NAME 3 TRUE 4 FALSE
<code>\ifinobject \¹... \else \²... \fi</code> 1 TRUE 2 FALSE
<code>\ifinoutputstream \¹... \else \²... \fi</code> 1 TRUE 2 FALSE
<code>\iflua {¹...} \²... \else \³... \fi</code> 1 TEXT 2 TRUE 3 FALSE
<code>\ifparameters \¹... \else \²... \fi</code> 1 TRUE 2 FALSE
<code>\iftrialtypesetting \¹... \else \²... \fi</code> 1 TRUE 2 FALSE
<code>\ifxml {¹...} {²...} \³... \else \⁴... \fi</code> 1 NODE 2 LPATH 3 TRUE 4 FALSE

<pre> \ifxmlatt {...} {...} {...} ... \else ... \fi 1 NODE 2 NAME 3 TEXT 4 TRUE 5 FALSE </pre>
<pre> \ifxmlatempty {...} {...} ... \else ... \fi 1 NODE 2 NAME 3 TRUE 4 FALSE </pre>
<pre> \ifxmleempty {...} {...} ... \else ... \fi 1 NODE 2 LPATH 3 TRUE 4 FALSE </pre>
<pre> \ifxmlselfempty {...} {...} ... \else ... \fi 1 NODE 2 LPATH 3 TRUE 4 FALSE </pre>
<pre> \ifxmltext {...} {...} ... \else ... \fi 1 NODE 2 LPATH 3 TRUE 4 FALSE </pre>
<pre> \ignoreimplicitspaces </pre>
<pre> \ignoretagsinexport [...;...] * NAME </pre>
<pre> \ignorevalue {...} * NAME </pre>
<pre> \im {...} * CONTENT </pre>
<pre> \impartefloat [...,..¹...,...] {...} {...} 1 inherits: \seteazaimpartefloat^{opt} 2 BEFEHL 3 CONTENT </pre>
<pre> \in {...} {...} [...] 1 TEXT^{OPT} ^{OPT} 2 TEXT 3 REFERENCE </pre>
<pre> \inalt {...} * CONTENT </pre>
<pre> \HIGH {...} * CONTENT instances: unitshigh </pre>
<pre> \unitshigh {...} * CONTENT </pre>
<pre> \inclinat </pre>

<code>\inclinataldin</code>
<code>\includeMPOverlaydata</code>
<code>\includemenu [...]</code> <code>* NAME</code>
<code>\includesvgbuffer [...]¹ [...,...²...,...]</code> <code>1 BUFFER</code> <code>2 offset = DIMENSION</code> <code> cache = da PATH</code>
<code>\includesvgfile [...]¹ [...,...²...,...]</code> <code>1 FILE</code> <code>2 offset = DIMENSION</code> <code> cache = da PATH</code>
<code>\includeversioninfo {...}</code> <code>* NAME</code>
<code>\increment \...</code> <code>* CSNAME</code>
<code>\incrementcounter [...]¹ [...]²</code> <code>1 NAME</code> <code>2 NUMMER</code>
<code>\incrementedcounter [...]</code> <code>* NAME</code>
<code>\incrementpagenumber</code>
<code>\incrementsubpagenumber</code>
<code>\incrementvalue {...}</code> <code>* NAME</code>
<code>\increment (...;...)</code> <code>* CSNAME NUMBER</code>
<code>\indentation</code>
<code>\infofont</code>
<code>\infofontbold</code>
<code>\inframed [...,...¹...,...]² {...}</code> <code>1 inherits: \seteazaiifConjurat</code> <code>2 CONTENT</code>
<code>\inheritedCOMANDAframed {...}</code> <code>* CONTENT</code>
<code>\inheritedCOMANDAframedbox [...]¹ ...²</code> <code>1 TEXT</code> <code>2 CSNAME NUMBER</code>

$\backslash$ inheritparameter [¹ ...] [² ...] [³ ...] 1 TEXT 2 TEXT 3 KEY
$\backslash$ inhibitallspacing
$\backslash$ inhibitblank
$\backslash$ inhibitwhitespace
$\backslash$ initializeboxstack {...} * NAME
$\backslash$ injos [...] * DIMENSION
$\backslash$ inlinebar [¹ ...] {...} ² 1 NAME 2 CONTENT
$\backslash$ inlinebuffer [... [*] ...] ^{OPT} * BUFFER
$\backslash$ inlinedbox {...} * CONTENT
$\backslash$ inlinemath {...} * CONTENT
$\backslash$ inlinemathematics {...} * CONTENT
$\backslash$ inlinemessage {...} * TEXT
$\backslash$ inlineordisplaymath {... ¹ } {... ² } 1 CONTENT 2 CONTENT
$\backslash$ inlineprettyprintbuffer {... ¹ } {... ² } 1 BUFFER 2 mp lua xml parsed-xml nested tex context niciunul NAME
$\backslash$ inlinerange [...] * REFERENCE
$\backslash$ inlinie {... ¹ } [... ²] ^{OPT} 1 TEXT 2 REFERENCE
$\backslash$ innerflushshapebox
$\backslash$ input {...} * FILE
$\backslash$ inputfilebarename

<code>\inputfilename</code>
<code>\inputfilerealsuffix</code>
<code>\inputfilesuffix</code>
<code>\inputgivenfile {...}</code> <code>* FILE</code>
<code>\input ...</code> <code>* FILE</code>
<code>\insertblankafter [...*...]</code> <code>* inherits: \blanc</code>
<code>\insertblankbefore [...*...]</code> <code>* inherits: \blanc</code>
<code>\insertlineafter {...}</code> <code>* CONTENT</code>
<code>\insertlinebefore {...}</code> <code>* CONTENT</code>
<code>\insertpages [...]¹ [...,...]² [...,...]³...</code> <code>1 FILE</code> <code>2 NUMMER</code> <code>3 latime = DIMENSION</code> <code> n = NUMMER</code> <code> category = NAME</code> <code> alternativ = a b implicit pagina</code>
<code>\inspectluatable \...</code> <code>* CSNAME</code>
<code>\instalarelimba [...]¹ [...,...]²...</code> <code>1 NAME</code> <code>2 inherits: \setarelimba</code>
<code>\instalarelimba [...]¹ [...]²</code> <code>1 NAME</code> <code>2 SPRACHE</code>
<code>\installactionhandler {...}</code> <code>* NAME</code>
<code>\installactivecharacter ...</code> <code>* CHARACTER</code>
<code>\installaligncommand {...}¹ {...}²</code> <code>1 NAME</code> <code>2 CONTENT</code>
<code>\installanddefineactivecharacter ...¹ {...}²</code> <code>1 CHARACTER</code> <code>2 BEFEHL</code>
<code>\installattributestack \...</code> <code>* CSNAME</code>

<pre> \installautocommandhandler \¹... {²...} \³... 1 CSNAME 2 NAME 3 CSNAME </pre>
<pre> \installautosetuphandler \¹... {²...} 1 CSNAME 2 NAME </pre>
<pre> \installbasicautosetuphandler \¹... {²...} 1 CSNAME 2 NAME </pre>
<pre> \installbasicparameterhandler \¹... {²...} 1 CSNAME 2 NAME </pre>
<pre> \installbottomframerenderer {¹...} {²...} 1 NAME 2 BEFEHL </pre>
<pre> \installcommalistprocessor {¹...} \²... 1 NAME 2 CSNAME </pre>
<pre> \installcommalistprocessorcommand {¹...} \²... 1 NAME 2 CSNAME </pre>
<pre> \installcommandhandler \¹... {²...} \³... 1 CSNAME 2 NAME 3 CSNAME </pre>
<pre> \installcorenamespace {[*]...} * NAME </pre>
<pre> \installctxfunction \¹... {²...} 1 CSNAME 2 CONTENT </pre>
<pre> \installctxscanner \¹... {²...} 1 CSNAME 2 CONTENT </pre>
<pre> \installdefinehandler \¹... {²...} \³... 1 CSNAME 2 NAME 3 CSNAME </pre>
<pre> \installdefinitionset \¹... {²...} 1 CSNAME 2 NAME </pre>
<pre> \installdefinitionsetmember \¹... {²...} \³... {⁴...} 1 CSNAME 2 NAME 3 CSNAME 4 NAME </pre>
<pre> \installdirectcommandhandler \¹... {²...} 1 CSNAME 2 NAME </pre>

\installdirectparameterhandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installdirectparametersethandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installdirectsetuphandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installdirectstyleandcolorhandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installframedautocommandhandler \ ¹ ... { ² ...} \ ³ ... 1 CSNAME 2 NAME 3 CSNAME
\installframedcommandhandler \ ¹ ... { ² ...} \ ³ ... 1 CSNAME 2 NAME 3 CSNAME
\installglobalmacrostack *... * CSNAME
\installinheritedframed { [*] ...} * NAME
\installleftframerenderer { ¹ ...} { ² ...} 1 NAME 2 BEFEHL
\installlocalcurrenthandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installmacrostack *... * CSNAME
\installnamespace { [*] ...} * NAME
\installoutputroutine \ ¹ ... { ² ...} 1 CSNAME 2 BEFEHL
\installpagearrangement ¹ ... { ² ...} 1 NAME 2 BEFEHL
\installparameterhandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installparameterhashhandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME

\installparametersethandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installparentinjector \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installprotectedctxfunction \ ¹ ... { ² ...} 1 CSNAME 2 CONTENT
\installprotectedctxscanner \ ¹ ... { ² ...} 1 CSNAME 2 CONTENT
\installrightframerenderer { ¹ ...} { ² ...} 1 NAME 2 BEFEHL
\installrootparameterhandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installsetuphandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installsetuponlycommandhandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installshipoutmethod { ¹ ...} { ² ...} 1 NAME 2 BEFEHL
\installsimplecommandhandler \ ¹ ... { ² ...} \ ³ ... 1 CSNAME 2 NAME 3 CSNAME
\installsimpleframedcommandhandler \ ¹ ... { ² ...} \ ³ ... 1 CSNAME 2 NAME 3 CSNAME
\installstyleandcolorhandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installstylisticautohandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installswitchcommandhandler \ ¹ ... { ² ...} \ ³ ... 1 CSNAME 2 NAME 3 CSNAME
\installswitchsetuphandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME

<code>\installtexdirective {...} {...} {...}</code> 1 NAME 2 BEFEHL 3 BEFEHL
<code>\installtextracker {...} {...} {...}</code> 1 NAME 2 BEFEHL 3 BEFEHL
<code>\installtopframerenderer {...} {...}</code> 1 NAME 2 BEFEHL
<code>\installunitsseparator {...} {...}</code> 1 NAME 2 BEFEHL
<code>\installunitsspace {...} {...}</code> 1 NAME 2 BEFEHL
<code>\installversioninfo {...} {...}</code> 1 NAME 2 BEFEHL
<code>\INSTANCEparameter {...}</code> * KEY
<code>\integerrounding {...}</code> * NUMMER
<code>\intertext {...}</code> * TEXT
<code>\interwordspaceafter</code>
<code>\interwordspacebefore</code>
<code>\interwordspaces {...}</code> * NUMMER
<code>\interwordspacesafter {...}</code> * NUMMER
<code>\interwordspacesbefore {...}</code> * NUMMER
<code>\intins [...,\stackrel{.1}{.}...,...]</code> {...} 1 inherits: \setupstretched 2 TEXT
<code>\invokepagehandler {...} {...}</code> 1 normal niciunul NAME 2 CONTENT
<code>\italic</code>
<code>\italicaldin</code>

<code>\italiccorrection</code>
<code>\italicface</code>
<code>\itemtag [...;...]</code> * REFERENCE OPT
<code>\jobfilename</code>
<code>\jobfilesuffix</code>
<code>\jos {...}</code> * CONTENT
<code>\jossus [...¹] {...²} {...³}</code> 1 stanga drea ^{OPT} ta 2 CONTENT 3 CONTENT
<code>\LOW {...}</code> * CONTENT instances: unitslow
<code>\unitslow {...}</code> * CONTENT
<code>\justimages</code>
<code>\Kap {...}</code> * TEXT
<code>\kannadanumerals {...}</code> * NUMMER
<code>\kap {...}</code> * TEXT
<code>\keephyphensequences</code>
<code>\keeplinestogether {...}</code> * NUMMER
<code>\keeporphans</code>
<code>\keeptoddlers</code>
<code>\keeptwins</code>
<code>\keepunwantedspaces</code>
<code>\kerncharacters [...¹] {...²}</code> 1 NUMMER OPT 2 TEXT
<code>\koreancirclenumerals {...}</code> * NUMMER

<code>\koreannumerals {...}</code> * NUMBER
<code>\koreannumeralsc {...}</code> * NUMBER
<code>\koreannumeralsp {...}</code> * NUMBER
<code>\koreanparentnumerals {...}</code> * NUMBER
<code>\LAMSTEX</code>
<code>\LATEX</code>
<code>\LamSTeX</code>
<code>\LaTeX</code>
<code>\Litera {...}</code> * NUMBER
<code>\Litere {...}</code> * NUMBER
<code>\LMTX</code>
<code>\LUAJITTEX</code>
<code>\LUAMETATEX</code>
<code>\LUATEX</code>
<code>\LUNA {...}</code> * NUMBER
<code>\Lua</code>
<code>\LuajitTeX</code>
<code>\LuaMetaTeX</code>
<code>\LuaTeX</code>
<code>\la {¹...} {²...} [³...]</code> 1 TEXT OPT OPT 2 TEXT 3 REFERENCE
<code>\LABELlimba</code> instances: head label mathlabel taglabel unit operator prefix suffix btxlabel
<code>\btxlabellimba</code>

<code>\lastnaturalboxdp</code>
<code>\lastnaturalboxht</code>
<code>\lastnaturalboxwd</code>
<code>\lastparwrapper {...}</code> <code>* NAME</code>
<code>\lastpredefinedsymbol</code>
<code>\lastrealpage</code>
<code>\lastrealpagenumber</code>
<code>\lastsubcountervalue [...]¹ [...]²</code> <code>1 NAME</code> <code>2 NUMMER</code>
<code>\lastsubpagenumber</code>
<code>\lasttwodigits {...}</code> <code>* NUMMER</code>
<code>\lastunitstring</code>
<code>\lastuserpage</code>
<code>\lastuserpagenumber</code>
<code>\lateluacode {...}</code> <code>* BEFEHL</code>
<code>\layeredtext [...]¹ [...] [...]² {...}³ {...}⁴</code> <code>1 inherits: \setupplayer^{OPT}</code> <code>2 inherits: \setuplayeredtext</code> <code>3 TEXT</code> <code>4 CONTENT</code>
<code>\layerheight</code>
<code>\layerwidth</code>
<code>\lbox ...¹ {...}²</code> <code>1 TEXT^{OPT}</code> <code>2 CONTENT</code>
<code>\lchexnumber {...}</code> <code>* NUMMER</code>
<code>\lchexnumbers {...}</code> <code>* NUMMER</code>
<code>\leftbottombox {...}</code> <code>* CONTENT</code>

`\leftbox` `{...}`
* CONTENT

```
\leifthbox    {...}
*    CONTENT
```

```
\leftLABELtext    {...}
*    KEY
instances: head label mathlabel
```

```
\leftheadtext {...}
```

```
\leftlabeltext    {...}
*    KEY
```

```
\leftmathlabeltext    {...}
*    KEY
```

```
\leftline    {...}
*  CONTENT
```

<code>\leftorrightthbox</code>	¹ <code>...</code>	² <code>{...}</code>
1 TEXT	OPT	
2 CONTENT		

<code>\leftorrightvbox</code>	¹ <code>...</code>	² <code>{...}</code>
1 <code>TEXT</code>	<code>OPT</code>	
2 <code>CONTENT</code>		

```

\leftorrightvtop    ...    {...}
1    TEXT           OPT
2    CONTENT

```

<code>\leftparbox</code>	<code>[...]</code>	<code>{...}</code>
1 global	OPT	
2 CONTENT		

\leftskipadaption

 $\left\llcorner$

`\lefttopbox` `{...}`
* CONTENT

`\lefttoright`

<code>\lefttorighthbox</code>	¹ <code>...</code>	² <code>{...}</code>
1 <code>TEXT</code>	<code>OPT</code>	
2 <code>CONTENT</code>		

<code>\lefttorightvbox</code>	¹ ...	² {...}
1 TEXT	OPT	
2 CONTENT		

<code>\lefttorightvtop</code>	¹ <code>...</code>	² <code>{...}</code>
1 TEXT	OPT	
2 CONTENT		

<code>\lesshyphens</code>
<code>\letbeundefined {...}</code> <code>* NAME</code>
<code>\letcatcodecommand \¹... \²... \³...</code> <code>1 CSNAME</code> <code>2 CHARACTER NUMBER</code> <code>3 CSNAME</code>
<code>\letCOMANDApameter {\¹...} \²...</code> <code>1 KEY</code> <code>2 CSNAME</code>
<code>\letcscsname \¹... \csname \²... \endcsname</code> <code>1 CSNAME</code> <code>2 NAME</code>
<code>\letcsnamecs \csname \¹... \endcsname \²...</code> <code>1 NAME</code> <code>2 CSNAME</code>
<code>\letcsnamecsname \csname \¹... \endcsname \csname \²... \endcsname</code> <code>1 NAME</code> <code>2 NAME</code>
<code>\letdummyparameter {\¹...} \²...</code> <code>1 KEY</code> <code>2 CSNAME</code>
<code>\letempty \[*]...</code> <code>* CSNAME</code>
<code>\letfromCOMANDApameter \¹... {\²...}</code> <code>1 CSNAME</code> <code>2 KEY</code>
<code>\letgvalue {\¹...} \²...</code> <code>1 NAME</code> <code>2 CSNAME</code>
<code>\letgvalueempty {\[*]...}</code> <code>* NAME</code>
<code>\letgvaluerelax {\[*]...}</code> <code>* NAME</code>
<code>\letterampersand</code>
<code>\letterat</code>
<code>\letterbackslash</code>
<code>\letterbar</code>
<code>\letterbgroup</code>
<code>\letterclosebrace</code>

<code>\lettercolon</code>
<code>\letterdollar</code>
<code>\letterdoublequote</code>
<code>\letteregroup</code>
<code>\letterescape</code>
<code>\letterexclamationmark</code>
<code>\letterhash</code>
<code>\letterhat</code>
<code>\letterhyphen</code>
<code>\letterleftbrace</code>
<code>\letterleftbracket</code>
<code>\letterleftparenthesis</code>
<code>\letterless</code>
<code>\lettermore</code>
<code>\letteropenbrace</code>
<code>\letterpercent</code>
<code>\letterquestionmark</code>
<code>\letterrightbrace</code>
<code>\letterrightbracket</code>
<code>\letterrightparenthesis</code>
<code>\lettersinglequote</code>
<code>\letterslash</code>
<code>\letterspacing</code> $[.\overset{1}{.}]$ $\{.\overset{2}{.}\}$ 1 NUMBER OPT 2 TEXT
<code>\lettertilde</code>
<code>\letterunderscore</code>

$\backslash$ letvalue {...} $\backslash$.. ² 1 NAME 2 CSNAME
$\backslash$ letvalueempty {...} * NAME
$\backslash$ letvaluerelax {...} * NAME
$\backslash$ fence .. * \{ \[\[(\[\bgroup \lparent \lparenthesis \lparen \lbracket \lbrack \lbrace \lceil \lceil \lceil \lceil \lfloor \lfloor \lfloor \lfloor \ulcorner \llcorner \lmoustache \llbracket \llangle \llangle \lgroup \vert \singleverticalbar \doubleverticalbar \tripleverticalbar \lvert \lVert \linterval \llointerval CHARACTER
$\backslash$ hbox {...} * CONTENT
$\backslash$ limba [...] * SPRACHE
$\backslash$ limbapincipala [...] * SPRACHE
$\backslash$ LANGUAGE
$\backslash$ limitatefirstline {...} {...} {...} ³ 1 TEXT 2 DIMENSION 3 BEFEHL
$\backslash$ limitatelines {...} {...} {...} ³ 1 NUMMER 2 BEFEHL 3 TEXT
$\backslash$ limitatetext {...} {...} {...} ³ 1 TEXT 2 [-+]DIMENSION 3 BEFEHL
$\backslash$ limitatetext {...} {..., ² ...} {...} ³ 1 TEXT 2 [-+]DIMENSION 3 BEFEHL
$\backslash$ linebox {...} * CONTENT
$\backslash$ linefillerhbox [...] ¹ $\backslash$.. ² {...} ³ 1 NAME OPT 2 TEXT 3 CONTENT
$\backslash$ linefillervbox [...] ¹ $\backslash$.. ² {...} ³ 1 NAME OPT 2 TEXT 3 CONTENT

<pre> \linefillervtop [...]¹ ...² {...} 1 NAME 2 TEXT 3 CONTENT </pre>
<pre> \LINENOTE {...} * TEXT instances: linenote </pre>
<pre> \linenote {...} * TEXT </pre>
<pre> \linespanningtext {...}¹ {...}² {...}³ 1 TEXT 2 DIMENSION 3 FONT </pre>
<pre> \linie {...} * CONTENT </pre>
<pre> \linieneagra [...][*]...,...] * inherits: \seteazaliniinegre </pre>
<pre> \liniesubtire </pre>
<pre> \linieumplere [...][*]...,...] * inherits: \seteazaliniiumplere </pre>
<pre> \liniinegre [...][*]...,...] * inherits: \seteazaliniinegre </pre>
<pre> \liniisubtiri [...][*]...,...] * inherits: \seteazaliniisubtire </pre>
<pre> \listcitation [...]¹...,...] [...]² 1 referinta = REFERENCE^{OPT} alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authorityyear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 REFERENCE </pre>
<pre> \listcitation [...]¹ [...]² 1 implicit category entry^{OPT} short pagina num textnum an index tag keywords autor authoryears authornum authorityyear 2 REFERENCE </pre>
<pre> \listcitation [...]¹...,...] [...]²...,...] 1 referinta = REFERENCE alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authorityyear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 KEY = VALUE </pre>

```

\listcite [...1...] [...2]
1 referinta = REFERENCE
  alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
              authoryear
  inainte   = BEFEHL
  dupa      = BEFEHL
  stanga    = BEFEHL
  dreapta   = BEFEHL
  inherits: \setupbtx
2 REFERENCE

```

```

\listcite [...1] [...2]
1 implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear
2 REFERENCE

```

```

\listcite [...1...] [...2...]
1 referinta = REFERENCE
  alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
              authoryear
  inainte   = BEFEHL
  dupa      = BEFEHL
  stanga    = BEFEHL
  dreapta   = BEFEHL
  inherits: \setupbtx
2 KEY = VALUE

```

```

\listnamespaces

```

```

\litera {...}
* NUMMER

```

```

\literalmode

```

```

\litere {...}
* NUMMER

```

```

\llap {...}
* CONTENT

```

```

\loadanyfile [...]
* FILE

```

```

\loadanyfileonce [...]
* FILE

```

```

\loadbtxdefinitionfile [...]
* FILE

```

```

\loadbtxreplacementfile [...]
* FILE

```

```

\loadcldfile [...]
* FILE

```

```

\loadcldfileonce [...]
* FILE

```

```

\loadfontgoodies [...]
* FILE

```

```

\loadluafile [...]
* FILE

```

<code>\loadluafileonce [...]</code> <code>* FILE</code>
<code>\loadspellchecklist [¹...] [²...]</code> <code>1 NAME</code> <code>2 FILE</code>
<code>\loadtexfile [...]</code> <code>* FILE</code>
<code>\loadtexfileonce [...]</code> <code>* FILE</code>
<code>\loadtypescriptfile [...]</code> <code>* FILE</code>
<code>\localanchorx {¹...} ²... ³...</code> <code>1 NAME</code> <code>2 NUMMER</code> <code>3 NUMMER</code>
<code>\localanchory {¹...} ²... ³...</code> <code>1 NAME</code> <code>2 NUMMER</code> <code>3 NUMMER</code>
<code>\localbox [¹...] {²...}</code> <code>1 NAME</code> <code>2 CONTENT</code>
<code>\localframed [¹] [...,²..._{OPT},...] {³...}</code> <code>1 NAME</code> <code>2 inherits: \seteazainconjurat</code> <code>3 CONTENT</code>
<code>\localframedwithsettings [¹] [...,²..._{OPT},...] {³...}</code> <code>1 NAME</code> <code>2 inherits: \seteazainconjurat</code> <code>3 CONTENT</code>
<code>\localhsize</code>
<code>\localmargintext [¹...] {²...}</code> <code>1 NAME</code> <code>2 CONTENT</code>
<code>\localpopbox ...</code> <code>* CSNAME NUMMER</code>
<code>\localpopmacro \...</code> <code>* CSNAME</code>
<code>\localpushbox ...</code> <code>* CSNAME NUMMER</code>
<code>\localpushmacro \...</code> <code>* CSNAME</code>
<code>\localundefine {¹...}</code> <code>* NAME</code>

<code>\locatedfilepath</code>
<code>\locatefilepath {.*}</code> * FILE
<code>\locfilename {...}</code> * FILE
<code>\loggingall</code>
<code>\lomihi {.^1} {.^2} {.^3}</code> 1 CONTENT 2 CONTENT 3 CONTENT
<code>\lowerbox {.^1} \.^2 {.^3}</code> 1 DIMENSION 2 CSNAME 3 CONTENT
<code>\lowercased {.*}</code> * TEXT
<code>\lowercasestring .^1 \to \.^2</code> 1 TEXT 2 CSNAME
<code>\lowercasing</code>
<code>\lowerlefthdoubleninequote</code>
<code>\lowerleftsingleninequote</code>
<code>\lowerrighthdoubleninequote</code>
<code>\lowerrightsingleninequote</code>
<code>\LOWHIGH [.^1] {.^2} {.^3}</code> 1 stanga dreaptă 2 CONTENT 3 CONTENT
<code>\LOWMIDHIGH {.^1} {.^2} {.^3}</code> 1 CONTENT 2 CONTENT 3 CONTENT
<code>\lrbbox {.^1} {.^2} {.^3} {.^4} {.^5}</code> 1 DIMENSION 2 DIMENSION 3 DIMENSION 4 DIMENSION 5 CONTENT
<code>\ltop .^1 {.^2}</code> 1 TEXT OPT 2 CONTENT

<code>\ltrhbox</code> $\overset{1}{...}$ $\overset{2}{\{...\}}$ 1 TEXT OPT 2 CONTENT
<code>\ltrtext</code> $\{...\}$ * CONTENT
<code>\ltrvbox</code> $\overset{1}{...}$ $\overset{2}{\{...\}}$ 1 TEXT OPT 2 CONTENT
<code>\ltrvtop</code> $\overset{1}{...}$ $\overset{2}{\{...\}}$ 1 TEXT OPT 2 CONTENT
<code>\luacode</code> $\{...\}$ * BEFEHL
<code>\luaconditional</code> $\backslash^*$ * CSNAME
<code>\luaenvironment</code> $\overset{*}{...}$ * FILE
<code>\luaexpanded</code> $\{...\}$ * BEFEHL
<code>\luaexpr</code> $[\overset{1}{...}]$ $\overset{2}{\{...\}}$ 1 TEXT OPT 2 CONTENT
<code>\luafunction</code> $\{...\}$ * BEFEHL
<code>\luajitTeX</code>
<code>\luamajorversion</code>
<code>\luametaTeX</code>
<code>\luaminorversion</code>
<code>\luaparameterset</code> $\{ \overset{1}{...} \}$ $\{ \overset{2}{...} \}$ 1 NAME 2 CONTENT
<code>\luasetup</code> $\{...\}$ * NAME
<code>\luaTeX</code>
<code>\luaversion</code>
<code>\luna</code> $\{...\}$ * NUMMER
<code>\lungimelista</code>

\METAFONT
\METAFUN
\METAPOST
\MetaFont
\MetaFontLogo
\MetaFun
\MetaPost
\MetaPostLogo
\MKII
\MKIV
\MKIX
\MKLX
\MKVI
\MKXI
\MKXL
\MONTHLONG {...} * NUMMER
\MONTHSHORT {...} * NUMMER
\MPanchor {...} * NAME
\MPbetex {...} * NAME
\MPc {...} * NAME
\MPCODE [¹ ...] { ² ...} 1 metafun minifun extrafun lessfun scaledfun doublefun binaryfun decimalfun positfun mprun metapost nofun scaledpost doublepost binarypost decimalpost simplefun 2 CONTENT
\MPcolor {...} * COLOR
\MPcoloronly {...} * COLOR

\MPcolumn {...} * NAME
\MPd {...} * NAME
\MPdpar \ ¹ ... {...} ² 1 CSNAME 2 KEY
\MPdrawing {...} * CONTENT
\MPfontsizehskip {...} * FONT
\MPgetmultipars {...} ¹ {...} ² 1 NAME 2 NAME
\MPgetmultishape {...} ¹ {...} ² 1 NAME 2 NAME
\MPgetposboxes {..., ¹ ...} {...} ² 1 NAME 2 NAME
\MPH {...} * NAME
\MPII
\MPIV
\MPinclusions [...] ¹ {...} ² {...} ³ 1 + OPT OPT 2 metafun minifun extrafun lessfun scaledfun doublefun binaryfun decimalfun positfun mprun metapost nofun scaledpost doublepost binarypost decimalpost simplefun 3 CONTENT
\MPLX
\MPleftskip {...} * NAME
\MPll {...} * NAME
\MPlr {...} * NAME
\MPls {...} * NAME
\MPMI
\MPML

\MPmenubuttons {...} * NAME
\MPn {...} * NAME
\MPnpar \ ¹ ... {... ² } 1 CSNAME 2 KEY
\MPoptions {...} * COLOR
\MPoverlayanchor {...} * NAME
\MPp {...} * NAME
\MPpage {...} * NAME
\MPpardata {...} * NAME
\MPplus {... ¹ } {... ² } {... ³ } 1 NAME 2 NUMBER 3 CONTENT
\MPpos {...} * NAME
\MPpositiongraphic {... ¹ } {...,... ² ...,...} 1 NAME 2 KEY = VALUE OPT
\MPposset {...} * NAME
\MPr {...} * NAME
\MPrawvar {... ¹ } {... ² } 1 NAME 2 KEY
\MPregion {...} * NAME
\MPrest {... ¹ } {... ² } 1 NAME 2 CONTENT
\MPrightskip {...} * NAME
\MPrs {...} * NAME

\MPspar \.^{.1}... {...}^{.2} 1 CSNAME 2 KEY
\MPstring {...}^{.*} * NAME
\MPtext {...}^{.*} * NAME
\MPtransparency {...}^{.*} * COLOR
\MPul {...}^{.*} * NAME
\MPur {...}^{.*} * NAME
\MPVI
\MPv {...}^{.1} {...}^{.2} {...}^{.3} 1 NAME 2 NUMMER 3 CONTENT
\MPvar {...}^{.*} * KEY
\MPvariable {...}^{.*} * KEY
\MPvv {...}^{.1} {...}^{.2} 1 NAME 2 CONTENT
\MPw {...}^{.*} * NAME
\MPwhd {...}^{.*} * NAME
\MPXL
\MPx {...}^{.*} * NAME
\MPxy {...}^{.*} * NAME
\MPxywhd {...}^{.*} * NAME
\MPy {...}^{.*} * NAME

<code>\m</code> $[...]$ $\{...\}$ 1 OPT <code>implimit i:default i:half i:tight i:fixed NAME</code> 2 <code>CONTENT</code>
<code>\majuscula</code> $\{...\}$ * <code>TEXT</code>
<code>\majusculemici</code> $\{...\}$ * <code>TEXT</code>
<code>\makecharacteractive</code> $\{...\}$ * <code>CHARACTER</code>
<code>\makerawcommalist</code> $[...]$¹$[...]$ $\{...\}$² 1 <code>BEFEHL</code> 2 <code>CSNAME</code>
<code>\makestrutofbox</code> $\{...\}$ * <code>CSNAME NUMBER</code>
<code>\malayalamnumerals</code> $\{...\}$ * <code>NUMBER</code>
<code>\mapfontsize</code> $[...]$¹ $[...]$²_{OPT} $[...]$³_{OPT} 1 <code>NAME</code> 2 <code>DIMENSION</code> 3 <code>DIMENSION</code>
<code>\mappedfontsize</code> $\{...\}$¹ $\{...\}$² 1 <code>NAME</code> 2 <code>DIMENSION</code>
<code>\marcaje</code> $(...)$¹$(...)$² $[...]$³ 1 <code>POSITION</code> 2 <code>POSITION</code> 3 <code>REFERENCE</code>
<code>\mare</code> $\{...\}$ * <code>CHARACTER</code>
<code>\margindata</code> $[...]$¹ $[...]$²_{OPT}$[...]$ $[...]$³_{OPT}$[...]$ $\{...\}$⁴ 1 <code>NAME</code> 2 <code>referinta = REFERENCE</code> <code>inherits: \setupmargindata</code> 3 <code>inherits: \setupmarginframed</code> 4 <code>CONTENT</code>
<code>\MARGINDATA</code> $[...]$¹$[...]$ $[...]$²_{OPT}$[...]$ $\{...\}$³ 1 <code>referinta = REFERENCE</code> <code>inherits: \setupmargindata</code> 2 <code>inherits: \setupmarginframed</code> 3 <code>CONTENT</code> <code>instances: inleftmargin inrightmargin inoutermargin ininnermargin inleftedge inrightedge</code> <code>inouteredge ininneredge atleftmargin atrightmargin inleft inright inouter ininner inmargin</code> <code>inother margintext</code>
<code>\atleftmargin</code> $[...]$¹$[...]$ $[...]$²_{OPT}$[...]$ $\{...\}$³ 1 <code>referinta = REFERENCE</code>_{OPT} <code>inherits: \setupmargindata</code> 2 <code>inherits: \setupmarginframed</code> 3 <code>CONTENT</code>

```

\atrightmargin [...,\stackrel{1}{=}\dots] [...,\stackrel{2}{=}\dots] {...}
1 referinta = REFERENCEOPT
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\ininner [...,\stackrel{1}{=}\dots] [...,\stackrel{2}{=}\dots] {...}
1 referinta = REFERENCEOPT
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\ininneredge [...,\stackrel{1}{=}\dots] [...,\stackrel{2}{=}\dots] {...}
1 referinta = REFERENCEOPT
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\ininnermargin [...,\stackrel{1}{=}\dots] [...,\stackrel{2}{=}\dots] {...}
1 referinta = REFERENCEOPT
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\inleft [...,\stackrel{1}{=}\dots] [...,\stackrel{2}{=}\dots] {...}
1 referinta = REFERENCEOPT
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\inleftedge [...,\stackrel{1}{=}\dots] [...,\stackrel{2}{=}\dots] {...}
1 referinta = REFERENCEOPT
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\inleftmargin [...,\stackrel{1}{=}\dots] [...,\stackrel{2}{=}\dots] {...}
1 referinta = REFERENCEOPT
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\inmargin [...,\stackrel{1}{=}\dots] [...,\stackrel{2}{=}\dots] {...}
1 referinta = REFERENCEOPT
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\inothet [...,\stackrel{1}{=}\dots] [...,\stackrel{2}{=}\dots] {...}
1 referinta = REFERENCEOPT
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\inouter [...,\stackrel{1}{=}\dots] [...,\stackrel{2}{=}\dots] {...}
1 referinta = REFERENCEOPT
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\inouteredge [...,\stackrel{1}{=}\dots] [...,\stackrel{2}{=}\dots] {...}
1 referinta = REFERENCEOPT
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

$\backslash\text{inoutermargin}$ [$\dots,\overset{1}{=}\dots$] [$\dots,\overset{2}{=}\dots$] $\{\dots\}$ 1 referinta = REFERENCE _{OPT} inherits: \setupmargindata 2 inherits: \setupmarginframed 3 CONTENT
$\backslash\text{inright}$ [$\dots,\overset{1}{=}\dots$] [$\dots,\overset{2}{=}\dots$] $\{\dots\}$ 1 referinta = REFERENCE _{OPT} inherits: \setupmargindata 2 inherits: \setupmarginframed 3 CONTENT
$\backslash\text{inrightedge}$ [$\dots,\overset{1}{=}\dots$] [$\dots,\overset{2}{=}\dots$] $\{\dots\}$ 1 referinta = REFERENCE _{OPT} inherits: \setupmargindata 2 inherits: \setupmarginframed 3 CONTENT
$\backslash\text{inrightmargin}$ [$\dots,\overset{1}{=}\dots$] [$\dots,\overset{2}{=}\dots$] $\{\dots\}$ 1 referinta = REFERENCE _{OPT} inherits: \setupmargindata 2 inherits: \setupmarginframed 3 CONTENT
$\backslash\text{margintext}$ [$\dots,\overset{1}{=}\dots$] [$\dots,\overset{2}{=}\dots$] $\{\dots\}$ 1 referinta = REFERENCE _{OPT} inherits: \setupmargindata 2 inherits: \setupmarginframed 3 CONTENT
$\backslash\text{markanchor}$ $\{\dots\}$ $\{\dots\}$ $\{\dots\}$ 1 NAME 2 NUMMER 3 NUMMER
$\backslash\text{markcontent}$ [$\overset{1}{\dots}$] $\{\overset{2}{\dots}\}$ 1 reset tot NAME _{OPT} 2 CONTENT
$\backslash\text{markedpages}$ [$\dots$] * NAME
$\backslash\text{marker}$ $\{\dots\}$ * NAME
$\backslash\text{markinjector}$ [$\dots$] * NAME
$\backslash\text{markpage}$ [$\overset{1}{\dots}$] [$\dots,\overset{2}{\dots}$] 1 NAME _{OPT} 2 [-+]NUMBER
$\backslash\text{markreferencepage}$
$\backslash\text{mat}$ $\{\dots\}$ * CONTENT
$\backslash\text{matematica}$ [$\overset{1}{\dots}$] $\{\overset{2}{\dots}\}$ 1 implicit i:default _{OPT} i:half i:tight i:fixed NAME 2 CONTENT

$\backslash\matematica$ [$\dots^1\dots$] $\{\dots^2\}$ 1 inherits: $\backslash\text{setupmathematics}$ 2 CONTENT
$\backslash\mathbf{math}$ [$\dots^1$] $\{\dots^2\}$ 1 implicit $\text{OPTdefault i:half i:tight i:fixed NAME}$ 2 CONTENT
$\backslash\text{MATHACCENT}$ [$\dots^1\dots$] $\{\dots^2\}$ 1 inherits: $\backslash\text{setupmathaccents}$ 2 CONTENT instances: grave acute hat tilde bar breve dot ddot overhook ring check overleftharpoon overrightharpoon dddot ddddots widegrave wideacute widehat widetilde widebar widebreve widedot wideddot widering widecheck widedddot vec wideoverleftharpoon wideoverrightharpoon wideoverleftarrow wideoverrightarrow wideoverlefttrightharpoon conjugate closure wideundertilde wideunderbar wideunderlefttrightharpoon wideunderleftharpoon wideunderleftarrow wideunderrightarrow
$\backslash\text{acute}$ [$\dots^1\dots$] $\{\dots^2\}$ 1 inherits: $\backslash\text{setupmathaccents}$ 2 CONTENT
$\backslash\text{bar}$ [$\dots^1\dots$] $\{\dots^2\}$ 1 inherits: $\backslash\text{setupmathaccents}$ 2 CONTENT
$\backslash\text{breve}$ [$\dots^1\dots$] $\{\dots^2\}$ 1 inherits: $\backslash\text{setupmathaccents}$ 2 CONTENT
$\backslash\text{check}$ [$\dots^1\dots$] $\{\dots^2\}$ 1 inherits: $\backslash\text{setupmathaccents}$ 2 CONTENT
$\backslash\text{closure}$ [$\dots^1\dots$] $\{\dots^2\}$ 1 inherits: $\backslash\text{setupmathaccents}$ 2 CONTENT
$\backslash\text{conjugate}$ [$\dots^1\dots$] $\{\dots^2\}$ 1 inherits: $\backslash\text{setupmathaccents}$ 2 CONTENT
$\backslash\text{ddddot}$ [$\dots^1\dots$] $\{\dots^2\}$ 1 inherits: $\backslash\text{setupmathaccents}$ 2 CONTENT
$\backslash\text{dddot}$ [$\dots^1\dots$] $\{\dots^2\}$ 1 inherits: $\backslash\text{setupmathaccents}$ 2 CONTENT
$\backslash\text{ddot}$ [$\dots^1\dots$] $\{\dots^2\}$ 1 inherits: $\backslash\text{setupmathaccents}$ 2 CONTENT
$\backslash\text{dot}$ [$\dots^1\dots$] $\{\dots^2\}$ 1 inherits: $\backslash\text{setupmathaccents}$ 2 CONTENT
$\backslash\text{grave}$ [$\dots^1\dots$] $\{\dots^2\}$ 1 inherits: $\backslash\text{setupmathaccents}$ 2 CONTENT

$$\backslash\mathrm{hat}\quad [\ldots,\ldots\overset{1}{=}\ldots,\ldots]\quad \{\ldots\overset{2}{\ldots}\}$$

```
1 inherits: \setupmathaccents
```

2 CONTENT

$$\backslash\overhook \quad [\dots,\dots\overset{1}{=}\dots,\dots] \quad \{\dots\overset{2}{.}\}$$

```
1 inherits: \setupmathaccents
```

2 CONTENT

$$\overleftarrow{\hspace{.1cm}} \quad [\dots,\dots\overset{1}{=}\dots,\dots] \quad \{\dots\}^2$$

```
1 inherits: \setupmathaccents OPT
```

2 CONTENT

$$\overrightarrow{\hspace{1.5cm}} \quad [\dots,\dots^1\dots,\dots] \quad \{\dots^2\}$$

```
1 inherits: \setupmathaccents OPT
```

2 CONTENT

```
\ring      [...,..1..,..]    {...2}
```

```
1 inherits: \setupmathaccents
```

2 CONTENT

$$\backslash\mathrm{tilde} \quad [\dots,\dots\overset{1}{=}\dots,\dots] \quad \{\dots\overset{2}{.}\}$$

```
1 inherits: \setupOPTmathaccents
```

2 CONTENT

$$\vec{[\dots, \dots \overset{1}{=} \dots, \dots]} \quad \{\dots \overset{2}{.}\}$$

```
1 inherits: \setupmathaccents
```

2 CONTENT

$$\backslash\mathrm{wideacute} \quad [\dots,\dots^1\dots,\dots] \quad \{\dots^2\dots\}$$

```
1 inherits: \setupmathaccentsOPT
```

2 CONTENT

$$\backslash\mathrm{widebar} \quad [\dots,\dots^1\dots,\dots] \quad \{\dots^2\}$$

```
1 inherits: \setupmathaccentsOPT
```

2 CONTENT

$$\backslash\mathrm{widebreve} \quad [\dots,\dots^1\dots,\dots] \quad \{\dots^2\dots\}$$

```
1 inherits: \setupmathaccentsOPT
```

2 CONTENT

$$\backslash widecheck \quad [\dots, \dots \overset{1}{=} \dots, \dots] \quad \{\dots \overset{2}{.}\}$$

```
1 inherits: \setupmathaccentsOPT
```

2 CONTENT

$$\text{\textbackslash widedddot} \quad [\dots\overset{1}{=}\dots] \quad \{\dots\overset{2}{.}\}$$

```
1 inherits: \setupmathaccentsOPT
```

2 CONTENT

$$\widetilde{\cdot} \quad [\dots, \dots \overset{1}{=} \dots, \dots] \quad \{\dots \overset{2}{\cdot}\}$$

```
1 inherits: \setupmathaccents
```

2 CONTENT

$$\backslash\mathrm{widedot} \quad [\dots,\dots\overset{1}{=}\dots,\dots] \quad \{\dots\}^2$$

```
1 inherits: \setupmathaccentsOPT
```

2 CONTENT

$$\backslash\mathrm{widegrave} \quad [\ldots,\ldots\overset{1}{=}\ldots,\ldots] \quad \{\ldots\overset{2}{.}\}$$

```
1 inherits: \setupmathaccentsOPT
```

2 CONTENT

$\widehat{}$ $\left[\dots, \dots, \overset{1}{}, \dots \right] \left\{ \dots \right\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\wideoverleftarrow{}$ $\left[\dots, \dots, \overset{1}{}, \dots \right] \left\{ \dots \right\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\wideoverleftharpoonup{}$ $\left[\dots, \dots, \overset{1}{}, \dots \right] \left\{ \dots \right\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\wideoverleftrightharpoonup{}$ $\left[\dots, \dots, \overset{1}{}, \dots \right] \left\{ \dots \right\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\wideoverrightarrow{}$ $\left[\dots, \dots, \overset{1}{}, \dots \right] \left\{ \dots \right\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\wideoverrightarrow{}\harpoonup$ $\left[\dots, \dots, \overset{1}{}, \dots \right] \left\{ \dots \right\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\widetilde{}$ $\left[\dots, \dots, \overset{1}{}, \dots \right] \left\{ \dots \right\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\wideunderbar{}$ $\left[\dots, \dots, \overset{1}{}, \dots \right] \left\{ \dots \right\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\wideunderleftarrow{}$ $\left[\dots, \dots, \overset{1}{}, \dots \right] \left\{ \dots \right\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\wideunderleftharpoonup{}$ $\left[\dots, \dots, \overset{1}{}, \dots \right] \left\{ \dots \right\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\wideunderleftrightharpoonup{}$ $\left[\dots, \dots, \overset{1}{}, \dots \right] \left\{ \dots \right\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\wideunderrightarrow{}$ $\left[\dots, \dots, \overset{1}{}, \dots \right] \left\{ \dots \right\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\wideunderrightarrow{}\harpoonup$ $\left[\dots, \dots, \overset{1}{}, \dots \right] \left\{ \dots \right\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\wideundertilde{}$ $\left[\dots, \dots, \overset{1}{}, \dots \right] \left\{ \dots \right\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT

$\ddagger$ $\ddagger$ 1 inherits: \setupmathdelimited ^{OPT} 2 CONTENT
$\dots$ $\dots$ 1 inherits: \setupmathdelimited ^{OPT} 2 CONTENT
$\ddot$ $\ddot$ 1 inherits: \setupmathdelimited ^{OPT} 2 CONTENT
$\doubleprime$ $\doubleprime$ 1 inherits: \setupmathdelimited ^{OPT} 2 CONTENT
$\doublereverseprime$ $\doublereverseprime$ 1 inherits: \setupmathdelimited ^{OPT} 2 CONTENT
$\hat$ $\hat$ 1 inherits: \setupmathdelimited ^{OPT} 2 CONTENT
$\prime$ $\prime$ 1 inherits: \setupmathdelimited ^{OPT} 2 CONTENT
$\quad\prime$ $\quad\prime$ 1 inherits: \setupmathdelimited ^{OPT} 2 CONTENT
$\quad\quad\prime$ $\quad\quad\prime$ 1 inherits: \setupmathdelimited ^{OPT} 2 CONTENT
$\reverseprime$ $\reverseprime$ 1 inherits: \setupmathdelimited ^{OPT} 2 CONTENT
$\ring$ $\ring$ 1 inherits: \setupmathdelimited ^{OPT} 2 CONTENT
$\starmark$ $\starmark$ 1 inherits: \setupmathdelimited ^{OPT} 2 CONTENT
$\tildemark$ $\tildemark$ 1 inherits: \setupmathdelimited ^{OPT} 2 CONTENT
$\tripleprime$ $\tripleprime$ 1 inherits: \setupmathdelimited ^{OPT} 2 CONTENT
$\triplereverseprime$ $\triplereverseprime$ 1 inherits: \setupmathdelimited ^{OPT} 2 CONTENT
$\mathdelimit$ $\mathdelimit$ 1 NAME ^{OPT} 2 NUMMER

$\backslash\mathrm{mathdelimiter}$ $[...]$ $[...,\overset{2}{=}\dots]$ 1 NAME OPT 2 inherits: $\backslash\mathrm{setupmathdelimiters}$
$\backslash\mathrm{mathdelimiter}$ $[...]$ * NUMMER OPT
$\backslash\mathrm{mathdelimiter}$ $[...,\overset{*}{=}\dots]$ * inherits: $\backslash\mathrm{setupmathdelimiters}$
$\backslash\mathrm{mathdigits}$ $\{...\}$ * TEXT
$\backslash\mathrm{mathtable}$ $[...]$ $\{...\}$ $\{...\}$ $\{...\}$ 1 ambele vfenced OPT 2 NUMMER 3 TEXT 4 TEXT
$\backslash\mathrm{MATHDOUBLEEXTENSIBLE}$ $[...,\overset{1}{=}\dots]$ $\{...\}$ 1 inherits: $\backslash\mathrm{setupmathstackers}$ OPT 2 TEXT instances: doublebar doublebrace doubleparent doublebracket overbarunderbar overbraceunderbrace overparentunderparent overbracketunderbracket
$\backslash\mathrm{doublebar}$ $[...,\overset{1}{=}\dots]$ $\{...\}$ 1 inherits: $\backslash\mathrm{setupmathstackers}$ 2 TEXT
$\backslash\mathrm{doublebrace}$ $[...,\overset{1}{=}\dots]$ $\{...\}$ 1 inherits: $\backslash\mathrm{setupmathstackers}$ 2 TEXT
$\backslash\mathrm{doublebracket}$ $[...,\overset{1}{=}\dots]$ $\{...\}$ 1 inherits: $\backslash\mathrm{setupmathstackers}$ 2 TEXT
$\backslash\mathrm{doubleparent}$ $[...,\overset{1}{=}\dots]$ $\{...\}$ 1 inherits: $\backslash\mathrm{setupmathstackers}$ 2 TEXT
$\backslash\mathrm{overbarunderbar}$ $[...,\overset{1}{=}\dots]$ $\{...\}$ 1 inherits: $\backslash\mathrm{setupmathstackers}$ OPT 2 TEXT
$\backslash\mathrm{overbraceunderbrace}$ $[...,\overset{1}{=}\dots]$ $\{...\}$ 1 inherits: $\backslash\mathrm{setupmathstackers}$ OPT 2 TEXT
$\backslash\mathrm{overbracketunderbracket}$ $[...,\overset{1}{=}\dots]$ $\{...\}$ 1 inherits: $\backslash\mathrm{setupmathstackers}$ OPT 2 TEXT
$\backslash\mathrm{overparentunderparent}$ $[...,\overset{1}{=}\dots]$ $\{...\}$ 1 inherits: $\backslash\mathrm{setupmathstackers}$ OPT 2 TEXT
$\backslash\mathrm{MATHDOUBLE}$ $\{...\}$ * TEXT

\MATHEXTENSIBLE [...¹] {...²} {...³}

1 reverse matematica text^{OPT} chemistry^{OPT}
 2 TEXT
 3 TEXT

instances: xrel xequal xleftarrow xrightarrow xleftrightharrow xlongleftarrow xlongrightarrow
 xlongleftrightharrow xLeftarrow xRightarrow xLeftrightharrow xtwoheadleftarrow
 xtwoheadrightarrow xmapsto xhookleftarrow xhookrightarrow xleftharpoondown xleftharpoonup
 xrightharpoondown xrightarpoonup xrightoverleftarrow xleftoverrightarrow xleftrightharpoons
 xrightleftharpoons xtriplerel mrel mequal mleftarrow mrightarrow mleftrightharrow mLeftarrow
 mRightarrow mLeftrightharrow mtwoheadleftarrow mtwoheadrightarrow mmapsto mhookleftarrow
 mhookrightarrow mleftharpoondown mleftharpoonup mrightharpoondown mrightharpoonup
 mrightoverleftarrow mleftoverrightarrow mleftrightharpoons mrightleftharpoons mtriplerel
 trel tequal tmapsto tleftarrow trightarrow tleftrightharrow tLeftarrow tRightarrow
 tLeftrightharrow ttwoheadleftarrow ttwoheadrightarrow tmapsto thookleftarrow thookrightarrow
 tleftharpoondown tleftharpoonup trightharpoondown trightharpoonup trightoverleftarrow
 tleftoverrightarrow tleftrightharpoons trightleftharpoons ttriplerel creturns cgives
 cmesomeric cequilibrium cleaningright cleaningleft clongreturns clonggives clongmesomeric
 clongequilibrium clongcleaningright clongcleaningleft

\MATHEXTENSIBLE [...¹] {...²} {...³}

1 inherits: \setupmathstackers^{OPT}
 2 TEXT
 3 TEXT

instances: xrel xequal xleftarrow xrightarrow xleftrightharrow xlongleftarrow xlongrightarrow
 xlongleftrightharrow xLeftarrow xRightarrow xLeftrightharrow xtwoheadleftarrow
 xtwoheadrightarrow xmapsto xhookleftarrow xhookrightarrow xleftharpoondown xleftharpoonup
 xrightharpoondown xrightarpoonup xrightoverleftarrow xleftoverrightarrow xleftrightharpoons
 xrightleftharpoons xtriplerel mrel mequal mleftarrow mrightarrow mleftrightharrow mLeftarrow
 mRightarrow mLeftrightharrow mtwoheadleftarrow mtwoheadrightarrow mmapsto mhookleftarrow
 mhookrightarrow mleftharpoondown mleftharpoonup mrightharpoondown mrightharpoonup
 mrightoverleftarrow mleftoverrightarrow mleftrightharpoons mrightleftharpoons mtriplerel
 trel tequal tmapsto tleftarrow trightarrow tleftrightharrow tLeftarrow tRightarrow
 tLeftrightharrow ttwoheadleftarrow ttwoheadrightarrow tmapsto thookleftarrow thookrightarrow
 tleftharpoondown tleftharpoonup trightharpoondown trightharpoonup trightoverleftarrow
 tleftoverrightarrow tleftrightharpoons trightleftharpoons ttriplerel creturns cgives
 cmesomeric cequilibrium cleaningright cleaningleft clongreturns clonggives clongmesomeric
 clongequilibrium clongcleaningright clongcleaningleft

\cequilibrium [...¹] {...²} {...³}

1 inherits: \setupmathstackers^{OPT}
 2 TEXT
 3 TEXT

\cgives [...¹] {...²} {...³}

1 inherits: \setupmathstackers^{OPT}
 2 TEXT
 3 TEXT

\cleaningleft [...¹] {...²} {...³}

1 inherits: \setupmathstackers^{OPT}
 2 TEXT
 3 TEXT

\cleaningright [...¹] {...²} {...³}

1 inherits: \setupmathstackers^{OPT}
 2 TEXT
 3 TEXT

\clongequilibrium [...¹] {...²} {...³}

1 inherits: \setupmathstackers^{OPT}
 2 TEXT
 3 TEXT

$\backslash\text{clonggives}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT
$\backslash\text{clongleaningleft}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT
$\backslash\text{clongleaningright}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT
$\backslash\text{clongmesomeric}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT
$\backslash\text{clongreturns}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT
$\backslash\text{cmesomeric}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT
$\backslash\text{creturns}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT
$\backslash\text{mequal}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT
$\backslash\text{mhookleftarrow}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT
$\backslash\text{mhookrightarrow}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT
$\backslash\text{mLeftarrow}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT
$\backslash\text{mLeftrightarrow}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT
$\backslash\text{mleftarrow}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT

$\backslash\mathrm{mleftharpoondown}$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: $\backslash\mathrm{setupmathstackers}$ OPT OPT OPT 2 TEXT 3 TEXT
$\backslash\mathrm{mleftharpoonup}$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: $\backslash\mathrm{setupmathstackers}$ OPT OPT OPT 2 TEXT 3 TEXT
$\backslash\mathrm{mleftoverrightarrow}$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: $\backslash\mathrm{setupmathstackers}$ OPT OPT OPT 2 TEXT 3 TEXT
$\backslash\mathrm{mleftrightharpoonup}$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: $\backslash\mathrm{setupmathstackers}$ OPT OPT OPT 2 TEXT 3 TEXT
$\backslash\mathrm{mleftrightharpoons}$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: $\backslash\mathrm{setupmathstackers}$ OPT OPT OPT 2 TEXT 3 TEXT
$\backslash\mathrm{mmapsto}$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: $\backslash\mathrm{setupmathstackers}$ OPT OPT OPT 2 TEXT 3 TEXT
$\backslash\mathrm{mRightarrow}$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: $\backslash\mathrm{setupmathstackers}$ OPT OPT OPT 2 TEXT 3 TEXT
$\backslash\mathrm{mrel}$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: $\backslash\mathrm{setupmathstackers}$ OPT OPT OPT 2 TEXT 3 TEXT
$\backslash\mathrm{mrightarrow}$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: $\backslash\mathrm{setupmathstackers}$ OPT OPT OPT 2 TEXT 3 TEXT
$\backslash\mathrm{mrightharpoondown}$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: $\backslash\mathrm{setupmathstackers}$ OPT OPT OPT 2 TEXT 3 TEXT
$\backslash\mathrm{mrightharpoonup}$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: $\backslash\mathrm{setupmathstackers}$ OPT OPT OPT 2 TEXT 3 TEXT
$\backslash\mathrm{mrightharpoons}$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: $\backslash\mathrm{setupmathstackers}$ OPT OPT OPT 2 TEXT 3 TEXT
$\backslash\mathrm{mrightrightarrow}$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: $\backslash\mathrm{setupmathstackers}$ OPT OPT OPT 2 TEXT 3 TEXT

$\backslash\text{mtripleleftarrow}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT
$\backslash\text{mtwoheadleftarrow}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT
$\backslash\text{mtwoheadrightarrow}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT
$\backslash\text{tequal}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT
$\backslash\text{thookleftarrow}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT
$\backslash\text{thookrightarrow}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT
$\backslash\text{tLeftarrow}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT
$\backslash\text{tLeftrightarrow}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT
$\backslash\text{tleftarrow}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT
$\backslash\text{tlefttharpoondown}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT
$\backslash\text{tlefttharpoonup}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT
$\backslash\text{tleftoverrightarrow}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT
$\backslash\text{tlefttrightharpoonrightarrow}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$
1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT 3 TEXT

$\leftrightharpoons$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
<pre> 1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT </pre>
$\tmapsto$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
<pre> 1 inherits: \setupmathstackers OPT OPT 2 TEXT 3 TEXT </pre>
$\tRrightarrow$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
<pre> 1 inherits: \setupmathstackers OPT OPT 2 TEXT 3 TEXT </pre>
$\trel$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
<pre> 1 inherits: \setupmathstackers OPT OPT 2 TEXT 3 TEXT </pre>
$\trightarrow$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
<pre> 1 inherits: \setupmathstackers OPT OPT 2 TEXT 3 TEXT </pre>
$\trightharpoondown$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
<pre> 1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT </pre>
$\trightharpoonup$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
<pre> 1 inherits: \setupmathstackers OPT OPT 2 TEXT 3 TEXT </pre>
$\trightleftharpoons$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
<pre> 1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT </pre>
$\trightoverleftarrow$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
<pre> 1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT </pre>
$\ttriplerel$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
<pre> 1 inherits: \setupmathstackers OPT OPT 2 TEXT 3 TEXT </pre>
$\twoheadleftarrow$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
<pre> 1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT </pre>
$\twoheadrightarrow$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
<pre> 1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT </pre>
$\xequal$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
<pre> 1 inherits: \setupmathstackers OPT OPT 2 TEXT 3 TEXT </pre>

```
\hookrightarrow [\dots] \{\dots\} \{\dots\}
```

```
1 inherits: \setupmathstackers
2 TEXT
3 TEXT
```

```
\xhookrightarrow{...,\overset{1}{...},...}\overset{2}{\{...\}}\overset{3}{\{...\}}
```

```
1 inherits: \setupmathstackersOPT
2
3
```

```
\xrightarrow{[\dots\overset{1}{=}\dots]} \{\dots\}^2 \{\dots\}^3
```

```
1 inherits: \setupmathstackers
2 TEXT
3 TEXT
```

$$\xleftrightarrow[\dots]{\dots} \{\dots\} \{\dots\}$$

```
\leftarrow [...] \overset{1}{=} [...] \{...\} \overset{2}{\{...\}} \overset{3}{\{...\}}
```

```
1 inherits: \setupmathstackers
```

```
2 TEXT
```

```
3 TEXT
```

$$\backslash\mathrm{lefttharpoonowdown} \quad [.,.,.\overset{1}{.},.] \quad \{\overset{2}{.}\} \quad \{\overset{3}{.}\}$$

```

1 inherits: \setupmathstackers OPT OPT OPT
2 TEXT
3 TEXT

```

```
\xleftharpoonup [\dots\stackrel{1}{\dots}\dots] \{\dots\}^2 \{\dots\}^3
1 inherits: \setupmathstackers
2 TEXT
3 TEXT
```

```
\leftoverrightarrow    [...,\stackrel{1}{...},...]   {\stackrel{2}{...}}   {\stackrel{3}{...}}
```

```
1 inherits:\setupmathstackers      OPT              OPT              OPT
```

```
2 TEXT
```

```
3 TEXT
```

```
\xleftarrow{...} \xrightarrow{...} \xleftrightarrow{...} \xleftrightarrow{...} \xleftrightarrow{...}
```

```
\lefttrightharpoons [\dots]^{1}[\dots] \{\dots\}^2 \{\dots\}^3
1 inherits: \setupmathstackers OPT OPT OPT
2 TEXT
3 TEXT
```

$$\backslash xlongleftarrow [\dots,\overset{1}{\dots},\dots] \quad \{\overset{2}{\dots}\} \quad \{\overset{3}{\dots}\}$$

```

1 inherits: \setupmathstackersOPT
2 TEXT
3 TEXT

```

```
\xlongleftarrow{...} \xrightarrow{...} \xleftrightarrow{...} \xrightarrow{...} \xrightarrow{...}
```

$$\xrightarrow[\text{inherits: \texttt{\textbackslash setupmathstackers}^{\text{OPT}}}]{{\dots}^1{\dots}} \quad \{\dots\}^2 \quad \{\dots\}^3$$

```
\xmapsto [...] 1 [...] {...} {...}
1 inherits: \setupmathstacks OPT OPT
2 TEXT
3 TEXT
```

```
\xrightarrow{[\dots,\overset{1}{=}\dots]} \{\overset{2}{\dots}\} \{\overset{3}{\dots}\}
```

```
1 inherits: \setupmathstackers
2 TEXT
3 TEXT
```

```
\xrel    [...1...2] {3...} {3...}
1 inherits: \setupmathstackersOPT OPT
2 TEXT
3 TEXT
```

```
\xrightarrow{[\dots\stackrel{1}{=}\dots]} \{\dots\}^2 \{\dots\}^3
```

```
1 inherits: \setupmathstackers OPT OPT
2 TEXT
3 TEXT
```

```
\xrightarrow[...]{...} \xrightarrow[...]{...} \xrightarrow[...]{...}
```

$$\xrightarrow{\quad} \left[\dots \overset{1}{=} \dots \right] \quad \overset{2}{\{ \dots \}} \quad \overset{3}{\{ \dots \}}$$

```
\xrightleftharpoons[...]{...} \{...\} \{...\}
```

1 inherits: \setupmathstackers OPT OPT OPT

2 TEXT

3 TEXT

```
\xrightarrowleft{...} \xrightarrowright{...} \xrightarrow{...} \xrightarrowleft{...} \xrightarrowright{...}
```

```
\xtriplerel [...] 1 {...} 2 {...} 3
1 inherits: \setupmathstackers OPT OPT
2 TEXT
3 TEXT
```

```
\twoheadleftarrow [...] 1 [...] {2...} {3...}
1 inherits: \setupmathstackers OPT OPT OPT
2 TEXT
3 TEXT
```

```
\twoheadrightarrow \dots1 \dots \{\dots\}2 \{\dots\}3
1 inherits: \setupmathstackers OPT OPT OPT
2 TEXT
3 TEXT
```

```
\cequilibrium      [..]   {..}   {...}
1 reverse matematica OPTtext chemistry OPT
2 TEXT
3 TEXT
```

```
\cgives    [^1..]    {^2..}    {^3..}
1  reverse matematica text chemistry
2  TEXT
3  TEXT
```

$\backslash\text{cleaningleft}$ [¹ ...] {... ² } {... ³ } 1 reverse matematica $\text{\textbackslash}$ text chemistry OPT 2 TEXT 3 TEXT
$\backslash\text{cleaningright}$ [¹ ...] {... ² } {... ³ } 1 reverse matematica $\text{\textbackslash}$ text chemistry OPT 2 TEXT 3 TEXT
$\backslash\text{clongequilibrium}$ [¹ ...] {... ² } {... ³ } 1 reverse matematica text $\text{\textbackslash}$ Chemistry OPT OPT 2 TEXT 3 TEXT
$\backslash\text{clonggives}$ [¹ ...] {... ² } {... ³ } 1 reverse matematica $\text{\textbackslash}$ text chemistry OPT 2 TEXT 3 TEXT
$\backslash\text{clongleaningleft}$ [¹ ...] {... ² } {... ³ } 1 reverse matematica text $\text{\textbackslash}$ Chemistry OPT OPT 2 TEXT 3 TEXT
$\backslash\text{clongleaningright}$ [¹ ...] {... ² } {... ³ } 1 reverse matematica text $\text{\textbackslash}$ Chemistry OPT OPT 2 TEXT 3 TEXT
$\backslash\text{clongmesomeric}$ [¹ ...] {... ² } {... ³ } 1 reverse matematica text $\text{\textbackslash}$ chemistry OPT OPT 2 TEXT 3 TEXT
$\backslash\text{clongreturns}$ [¹ ...] {... ² } {... ³ } 1 reverse matematica $\text{\textbackslash}$ text chemistry OPT 2 TEXT 3 TEXT
$\backslash\text{cmesomeric}$ [¹ ...] {... ² } {... ³ } 1 reverse matematica $\text{\textbackslash}$ text chemistry OPT OPT 2 TEXT 3 TEXT
$\backslash\text{creturns}$ [¹ ...] {... ² } {... ³ } 1 reverse matematica text $\text{\textbackslash}$ Chemistry OPT 2 TEXT 3 TEXT
$\backslash\text{mequal}$ [¹ ...] {... ² } {... ³ } 1 reverse matematica text $\text{\textbackslash}$ chemistry OPT 2 TEXT 3 TEXT
$\backslash\text{mhookleftarrow}$ [¹ ...] {... ² } {... ³ } 1 reverse matematica $\text{\textbackslash}$ text chemistry OPT OPT 2 TEXT 3 TEXT
$\backslash\text{mhookrightarrow}$ [¹ ...] {... ² } {... ³ } 1 reverse matematica text $\text{\textbackslash}$ Chemistry OPT OPT 2 TEXT 3 TEXT

$\backslash\mathrm{mLeftarrow}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 reverse matematica ^{OPT} text chemi ^{OPT} stry ^{OPT} 2 TEXT 3 TEXT
$\backslash\mathrm{mLeftrightarrow}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 reverse matematica text ^{OPT} Chemistry ^{OPT} ^{OPT} 2 TEXT 3 TEXT
$\backslash\mathrm{mleftarrow}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 reverse matematica ^{OPT} text chemi ^{OPT} stry ^{OPT} 2 TEXT 3 TEXT
$\backslash\mathrm{mleftharpoondown}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 reverse matematica text ^{OPT} Chemi ^{OPT} stry ^{OPT} 2 TEXT 3 TEXT
$\backslash\mathrm{mleftharpoonup}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 reverse matematica text ^{OPT} chemi ^{OPT} stry ^{OPT} 2 TEXT 3 TEXT
$\backslash\mathrm{mleftoverrightarrow}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 reverse matematica text chemi ^{OPT} stry ^{OPT} ^{OPT} 2 TEXT 3 TEXT
$\backslash\mathrm{mleftrightharpoonup}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 reverse matematica text ^{OPT} Chemistry ^{OPT} ^{OPT} 2 TEXT 3 TEXT
$\backslash\mathrm{mleftrightharpoons}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 reverse matematica text chemi ^{OPT} stry ^{OPT} ^{OPT} 2 TEXT 3 TEXT
$\backslash\mathrm{mmapsto}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 reverse matematica text ^{OPT} Chemistry ^{OPT} ^{OPT} 2 TEXT 3 TEXT
$\backslash\mathrm{mRrightarrow}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 reverse matematica ^{OPT} text chemi ^{OPT} stry ^{OPT} 2 TEXT 3 TEXT
$\backslash\mathrm{mrel}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 reverse matematica ^{OPT} text chemi ^{OPT} stry ^{OPT} 2 TEXT 3 TEXT
$\backslash\mathrm{mrightharpoonup}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 reverse matematica ^{OPT} text chemi ^{OPT} stry ^{OPT} 2 TEXT 3 TEXT
$\backslash\mathrm{mrightharpoondown}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 reverse matematica text chemi ^{OPT} stry ^{OPT} ^{OPT} 2 TEXT 3 TEXT

$\backslash\mathrm{mrightharpoonup}$ $[^1\ldots]$ $\{\ldots\}^2$ $\{\ldots\}^3$
1 reverse matematica text ^{OPT} chemistry ^{OPT} 2 TEXT 3 TEXT
$\backslash\mathrm{rightleftharpoons}$ $[^1\ldots]$ $\{\ldots\}^2$ $\{\ldots\}^3$
1 reverse matematica text chemistry ^{OPT} 2 TEXT 3 TEXT
$\backslash\mathrm{rightrightarrows}$ $[^1\ldots]$ $\{\ldots\}^2$ $\{\ldots\}^3$
1 reverse matematica text chemistry ^{OPT} 2 TEXT 3 TEXT
$\backslash\mathrm{mtriplerel}$ $[^1\ldots]$ $\{\ldots\}^2$ $\{\ldots\}^3$
1 reverse matematica ^{OPT} text chemistry ^{OPT} 2 TEXT 3 TEXT
$\backslash\mathrm{mtwoheadleftarrow}$ $[^1\ldots]$ $\{\ldots\}^2$ $\{\ldots\}^3$
1 reverse matematica text chemistry ^{OPT} 2 TEXT 3 TEXT
$\backslash\mathrm{mtwoheadrightarrow}$ $[^1\ldots]$ $\{\ldots\}^2$ $\{\ldots\}^3$
1 reverse matematica text chemistry ^{OPT} 2 TEXT 3 TEXT
$\backslash\mathrm{tequal}$ $[^1\ldots]$ $\{\ldots\}^2$ $\{\ldots\}^3$
1 reverse matematica text chemistry ^{OPT} 2 TEXT 3 TEXT
$\backslash\mathrm{thookleftarrow}$ $[^1\ldots]$ $\{\ldots\}^2$ $\{\ldots\}^3$
1 reverse matematica text chemistry ^{OPT} 2 TEXT 3 TEXT
$\backslash\mathrm{thookrightarrow}$ $[^1\ldots]$ $\{\ldots\}^2$ $\{\ldots\}^3$
1 reverse matematica text ^{OPT} chemistry ^{OPT} 2 TEXT 3 TEXT
$\backslash\mathrm{tLeftarrow}$ $[^1\ldots]$ $\{\ldots\}^2$ $\{\ldots\}^3$
1 reverse matematica ^{OPT} text chemistry ^{OPT} 2 TEXT 3 TEXT
$\backslash\mathrm{tLeftrightarrow}$ $[^1\ldots]$ $\{\ldots\}^2$ $\{\ldots\}^3$
1 reverse matematica text ^{OPT} chemistry ^{OPT} 2 TEXT 3 TEXT
$\backslash\mathrm{tleftarrow}$ $[^1\ldots]$ $\{\ldots\}^2$ $\{\ldots\}^3$
1 reverse matematica ^{OPT} text chemistry ^{OPT} 2 TEXT 3 TEXT
$\backslash\mathrm{tleftarrowthreetimes}$ $[^1\ldots]$ $\{\ldots\}^2$ $\{\ldots\}^3$
1 reverse matematica text chemistry ^{OPT} 2 TEXT 3 TEXT

$\xrightarrow{[...]\{\dots\}\{\dots\}}$ 1 reverse matematica text chemistry OPT OPT 2 TEXT 3 TEXT
$\xrightarrow{[...]\{\dots\}\{\dots\}}$ 1 reverse matematica text chemistry OPT OPT 2 TEXT 3 TEXT
$\xrightarrow{[...]\{\dots\}\{\dots\}}$ 1 reverse matematica text chemistry OPT OPT 2 TEXT 3 TEXT
$\hookrightarrow{[...]\{\dots\}\{\dots\}}$ 1 reverse matematica text chemistry OPT OPT 2 TEXT 3 TEXT
$\hookrightarrow{[...]\{\dots\}\{\dots\}}$ 1 reverse matematica text chemistry OPT OPT 2 TEXT 3 TEXT
$\xleftarrow{[...]\{\dots\}\{\dots\}}$ 1 reverse matematica text chemistry OPT OPT 2 TEXT 3 TEXT
$\xleftrightarrow{[...]\{\dots\}\{\dots\}}$ 1 reverse matematica text chemistry OPT OPT 2 TEXT 3 TEXT
$\xleftarrow{[...]\{\dots\}\{\dots\}}$ 1 reverse matematica text chemistry OPT OPT 2 TEXT 3 TEXT
$\xleftarrow{\downarrow}[...]\{\dots\}\{\dots\}$ 1 reverse matematica text chemistry OPT OPT 2 TEXT 3 TEXT
$\xleftarrow{\uparrow}[...]\{\dots\}\{\dots\}$ 1 reverse matematica text chemistry OPT OPT 2 TEXT 3 TEXT
$\xleftrightarrow{[...]\{\dots\}\{\dots\}}$ 1 reverse matematica text chemistry OPT OPT 2 TEXT 3 TEXT
$\xleftrightarrow{[...]\{\dots\}\{\dots\}}$ 1 reverse matematica text chemistry OPT OPT 2 TEXT 3 TEXT
$\xleftrightarrow{[...]\{\dots\}\{\dots\}}$ 1 reverse matematica text chemistry OPT OPT 2 TEXT 3 TEXT
$\xleftrightarrow{[...]\{\dots\}\{\dots\}}$ 1 reverse matematica text chemistry OPT OPT 2 TEXT 3 TEXT

$\backslash$ twoheadrightarrow [...] ¹ {...} ² {...} ³ 1 reverse matematica text chemistry OPT OPT 2 TEXT 3 TEXT
$\backslash$ mathfiller {...} * NUMMER
MATHFILLER instances: relfill equalfill leftarrowfill rightarrowfill twoheadleftarrowfill twoheadrightarrowfill mapstofill leftharpoondownfill leftharpoonupfill rightharpoondownfill rightharpoonupfill rightoverleftarrowfill leftoverrightarrowfill triplerelfill leftrightharrowfill Leftarrowfill Rightarrowfill Leftrightarrowfill Rightharpoonupfill
$\backslash$ equalfill
$\backslash$ Leftarrowfill
$\backslash$ Leftrightarrowfill
$\backslash$ leftarrowfill
$\backslash$ leftharpoondownfill
$\backslash$ leftharpoonupfill
$\backslash$ leftoverrightarrowfill
$\backslash$ leftrightharrowfill
$\backslash$ mapstofill
$\backslash$ Rightarrowfill
$\backslash$ Rightharpoonupfill
$\backslash$ relfill
$\backslash$ rightarrowfill
$\backslash$ rightharpoondownfill
$\backslash$ rightharpoonupfill
$\backslash$ rightoverleftarrowfill
$\backslash$ triplerelfill
$\backslash$ twoheadleftarrowfill
$\backslash$ twoheadrightarrowfill
$\backslash$ mathfraktur

$\backslash\text{MATHFRAMED}$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathframed}$ 2 CONTENT instances: mframed inmframed mcframed mtfamed
$\backslash\text{inmframed}$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathframed}$ 2 CONTENT
$\backslash\text{mcframed}$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathframed}$ 2 CONTENT
$\backslash\text{mframed}$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathframed}$ 2 CONTENT
$\backslash\text{mtfamed}$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathframed}$ 2 CONTENT
$\backslash\text{MATHFUNCTION}$ instances: arccos arcsin arctan arccosh arcsinh arctanh acos asin atan arg cosh cos coth cot csc deg det dim erf erfc erfi exp gcd hom inf inv injlim ker lg liminf limsup lim ln log median max min mod projlim Pr sec sinh sin sup tanh tan diff adj coker neg
$\backslash\text{acos}$
$\backslash\text{adj}$
$\backslash\text{arccos}$
$\backslash\text{arccosh}$
$\backslash\text{arcsin}$
$\backslash\text{arcsinh}$
$\backslash\text{arctan}$
$\backslash\text{arctanh}$
$\backslash\text{arg}$
$\backslash\text{MATHFUNCTION}$ $\{...\}$ * CONTENT instances: adjoint orthogonalcomplement transpose derivative secondderivative thirdderivative fourthderivative preimage inverse
$\backslash\text{adjoint}$ $\{...\}$ * CONTENT
$\backslash\text{derivative}$ $\{...\}$ * CONTENT
$\backslash\text{fourthderivative}$ $\{...\}$ * CONTENT

$\backslash\text{inverse}$ {...} * CONTENT
$\backslash\text{orthogonalcomplement}$ {...} * CONTENT
$\backslash\text{preimage}$ {...} * CONTENT
$\backslash\text{secondderivative}$ {...} * CONTENT
$\backslash\text{thirdderivative}$ {...} * CONTENT
$\backslash\text{transpose}$ {...} * CONTENT
$\backslash\text{asin}$
$\backslash\text{atan}$
$\backslash\text{coker}$
$\backslash\text{cos}$
$\backslash\text{cosh}$
$\backslash\text{cot}$
$\backslash\text{coth}$
$\backslash\text{csc}$
$\backslash\text{deg}$
$\backslash\text{det}$
$\backslash\text{diff}$
$\backslash\text{dim}$
$\backslash\text{erf}$
$\backslash\text{erfc}$
$\backslash\text{erfi}$
$\backslash\text{exp}$
$\backslash\text{gcd}$
$\backslash\text{hom}$

<code>\inf</code>
<code>\injl</code>
<code>\inv</code>
<code>\ker</code>
<code>\lg</code>
<code>\lim</code>
<code>\liminf</code>
<code>\limsup</code>
<code>\ln</code>
<code>\log</code>
<code>\max</code>
<code>\median</code>
<code>\min</code>
<code>\mod</code>
<code>\neg</code>
<code>\Pr</code>
<code>\projlim</code>
<code>\sec</code>
<code>\sin</code>
<code>\sinh</code>
<code>\sup</code>
<code>\tan</code>
<code>\tanh</code>
<code>\mathGreekn</code> <code>\mathGreekn</code> <code>{...}</code> * NUMMER
<code>\mathgreeknumerals</code> <code>{...}</code> * NUMMER

$\backslash$ mathgroupedcommandcs $\backslash^*...$ * CSNAME
$\backslash$ mathit
$\backslash$ mathitalic
$\backslash$ mathlimop $\{...\}$ * CONTENT
$\backslash$ MATHMATRIX $[...,\dots^1,...] \{...\}^2$ 1 inherits: $\backslash$ setupmathmatrix 2 CONTENT instances: matrix bmatrix pmatrix vmatrix vvmatrix vvvmatrix gmatrix bracematrix thematrix
$\backslash$ bmatrix $[...,\dots^1,...] \{...\}^2$ 1 inherits: $\backslash$ setupmathmatrix 2 CONTENT
$\backslash$ bracematrix $[...,\dots^1,...] \{...\}^2$ 1 inherits: $\backslash$ setupmathmatrix 2 CONTENT
$\backslash$ gmatrix $[...,\dots^1,...] \{...\}^2$ 1 inherits: $\backslash$ setupmathmatrix 2 CONTENT
$\backslash$ matrix $[...,\dots^1,...] \{...\}^2$ 1 inherits: $\backslash$ setupmathmatrix 2 CONTENT
$\backslash$ pmatrix $[...,\dots^1,...] \{...\}^2$ 1 inherits: $\backslash$ setupmathmatrix 2 CONTENT
$\backslash$ thematrix $[...,\dots^1,...] \{...\}^2$ 1 inherits: $\backslash$ setupmathmatrix 2 CONTENT
$\backslash$ vmatrix $[...,\dots^1,...] \{...\}^2$ 1 inherits: $\backslash$ setupmathmatrix 2 CONTENT
$\backslash$ vvmatrix $[...,\dots^1,...] \{...\}^2$ 1 inherits: $\backslash$ setupmathmatrix 2 CONTENT
$\backslash$ vvmatrix $[...,\dots^1,...] \{...\}^2$ 1 inherits: $\backslash$ setupmathmatrix 2 CONTENT
$\backslash$ mathnesting $[...^1] \{...\}^2$ 1 NUMBER OPT 2 CONTENT
$\backslash$ MATHNESTING $[...,\dots^1,...] \{...\}^2$ 1 inherits: $\backslash$ setupmathnesting 2 CONTENT instances: mathtogether mathloose

$\backslash\mathrm{mathloose}$ [$\dots\stackrel{1}{=}\dots$] $\{\dots\}^2$ 1 inherits: $\backslash\mathrm{setupmathnesting}$ 2 CONTENT
$\backslash\mathrm{mathtogether}$ [$\dots\stackrel{1}{=}\dots$] $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathnesting}$ 2 CONTENT
$\backslash\mathrm{mathnolop}$ $\{\dots\}$ * CONTENT
$\backslash\mathrm{mathop}$ $\{\dots\}$ * CONTENT
$\backslash\mathrm{mathopdolimits}$ $\{\dots\}$ * CONTENT
$\backslash\mathrm{MATHOPERATOR}$ [$\dots\stackrel{1}{=}\dots$] $\{\dots\}^2$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ OPT 2 CONTENT instances: integral iintegral iiintegral iiiintegral int iint iiint iiiint oint oint oiiint intc ointc aointc sumint barint doublebarint slashint aodownintc rectangularpoleintc semicirclepoleintc circlepoleoutsideintc circlepoleinsideintc squareintc hookleftarrowint timesint capint cupint upperint lowerint sum blackboardsum modtwosum prod coprod bigwedge bigvee bigcap bigcup bigodot bigoplus bigotimes bigodot biguplus bigsqcap bigsqcup bigtimes leftouterjoin rightouterjoin fullouterjoin bigbottom bigtop bigsolidus bigreversesolidus bigdoublewedge bigdoublevee
$\backslash\mathrm{aodownintc}$ [$\dots\stackrel{1}{=}\dots$] $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ OPT 2 CONTENT
$\backslash\mathrm{aointc}$ [$\dots\stackrel{1}{=}\dots$] $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ OPT 2 CONTENT
$\backslash\mathrm{barint}$ [$\dots\stackrel{1}{=}\dots$] $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ OPT 2 CONTENT
$\backslash\mathrm{bigbottom}$ [$\dots\stackrel{1}{=}\dots$] $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ OPT 2 CONTENT
$\backslash\mathrm{bigcap}$ [$\dots\stackrel{1}{=}\dots$] $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ OPT 2 CONTENT
$\backslash\mathrm{bigcup}$ [$\dots\stackrel{1}{=}\dots$] $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ OPT 2 CONTENT
$\backslash\mathrm{bigdoublevee}$ [$\dots\stackrel{1}{=}\dots$] $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ OPT 2 CONTENT
$\backslash\mathrm{bigdoublewedge}$ [$\dots\stackrel{1}{=}\dots$] $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ OPT 2 CONTENT

$\backslash\text{bigodot}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT
$\backslash\text{bigoplus}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT
$\backslash\text{bigotimes}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT
$\backslash\text{bigreversesolidus}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT OPT 2 CONTENT
$\backslash\text{bigsolidus}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT OPT 2 CONTENT
$\backslash\text{bigsqcap}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT
$\backslash\text{bigsqcup}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT
$\backslash\text{bigtimes}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT
$\backslash\text{bigtop}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT
$\backslash\text{bigudot}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT
$\backslash\text{biguplus}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT
$\backslash\text{bigvee}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT
$\backslash\text{bigwedge}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT
$\backslash\text{blackboardsum}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT OPT 2 CONTENT
$\backslash\text{capint}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT

```
\circlepoleinsideintc    [...,..1..,..]    {...2..}
```

`\circlepoleoutsideintc` $[...,\dots^1_{=}\dots]$ $\{\dots\}^2$

$$\backslash\mathrm{coprod} \quad [\dots,\dots^1\dots,\dots] \quad \{\dots^2\dots\}$$
$$\backslash\text{cupint} \quad [\dots, \dots \overset{1}{=} \dots, \dots] \quad \{\dots \overset{2}{\dots}\}$$
$$\backslash\mathrm{doublebarint} \quad [\dots,\dots\overset{1}{=}\dots,\dots] \quad \{\dots\overset{2}{\}$$
$$\backslash\text{fullouterjoin} \quad [\dots, \dots \stackrel{1}{=} \dots, \dots] \quad \{\dots\}^2$$
$$\hookrightarrow [\dots, \dots \stackrel{1}{=} \dots, \dots] \quad \{\dots\}^2$$
$$\backslash\text{iiiiint} \quad [\dots\overset{1}{=}\dots] \quad \{\dots^2\}$$
$$\iiint [\dots]^1_{\dots} \{\dots\}^2$$
$$\backslash\mathrm{iint}\quad [\dots\overset{1}{=}\dots]\quad \{\dots\overset{2}{.}\}$$
$$\iiint [\dots]^1 \{\dots\}^2$$
$$\backslash iint \quad [\dots, \dots \stackrel{1}{=} \dots, \dots] \quad \{\dots \stackrel{2}{\dots}\}$$
$$\iint [\dots]^1 \{\dots\}^2$$
$$\backslash \text{int} \quad [\dots, \dots \stackrel{1}{=} \dots, \dots] \quad \{\dots \stackrel{2}{\dots}\}$$
$$\backslash \text{intc} \quad [\dots, \dots \overset{1}{=} \dots, \dots] \quad \{\dots \overset{2}{\dots}\}$$

$\backslash\mathrm{integral}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ $\overset{OPT}{}$ 2 CONTENT
$\backslash\mathrm{leftouterjoin}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ $\overset{OPT}{}$ 2 CONTENT
$\backslash\mathrm{lowerint}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ $\overset{OPT}{}$ 2 CONTENT
$\backslash\mathrm{modtwosum}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ $\overset{OPT}{}$ 2 CONTENT
$\backslash\mathrm{oiint}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ $\overset{OPT}{}$ 2 CONTENT
$\backslash\mathrm{oint}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ $\overset{OPT}{}$ 2 CONTENT
$\backslash\mathrm{oint}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ $\overset{OPT}{}$ 2 CONTENT
$\backslash\mathrm{ointc}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ $\overset{OPT}{}$ 2 CONTENT
$\backslash\mathrm{prod}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ $\overset{OPT}{}$ 2 CONTENT
$\backslash\mathrm{rectangularpoleintc}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ $\overset{OPT}{}$ $\overset{OPT}{}$ 2 CONTENT
$\backslash\mathrm{rightouterjoin}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ $\overset{OPT}{}$ 2 CONTENT
$\backslash\mathrm{semicirclepoleintc}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ $\overset{OPT}{}$ $\overset{OPT}{}$ 2 CONTENT
$\backslash\mathrm{slashint}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ $\overset{OPT}{}$ 2 CONTENT
$\backslash\mathrm{squareintc}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ $\overset{OPT}{}$ $\overset{OPT}{}$ 2 CONTENT
$\backslash\mathrm{sum}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ $\overset{OPT}{}$ 2 CONTENT

$\sumint$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\text{\setupmathoperators}$ $\text{\textit{OPT}}$ 2 CONTENT
$\timesint$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\text{\setupmathoperators}$ $\text{\textit{OPT}}$ 2 CONTENT
$\upperint$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\text{\setupmathoperators}$ $\text{\textit{OPT}}$ 2 CONTENT
$\mathop{no}\limits$ $\{...\}$ * CONTENT
$\mathop{text}$ $\{...\}$ * TEXT
$\mathop{with}\limits$ $\{...\}$ $\{...\}$ 1 CONTENT 2 CONTENT
$\mathop{HORNAMENT}$ $\{...\}$ * CONTENT
$\mathop{hortext}$ $\{...\}$ $\{...\}$ 1 TEXT 2 TEXT
$\mathop{over}$ $[...]$ $[...,\overset{2}{=},...]$ $\{...\}$ $\{...\}$ 1 sus vfenced $\text{\textit{OPT}}$ $\text{\textit{OPT}}$ 2 inherits: $\text{\setupmathstackers}$ 3 NUMMER 4 TEXT
$\mathop{OVEREXTENSIBLE}$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\text{\setupmathstackers}$ $\text{\textit{OPT}}$ 2 TEXT instances: overleftarrow overrightarrow overleftrightarrow overtwoheadleftarrow overtwoheadrightarrow overlefttailarrow overrighttailarrow overleftbararrow overrightbararrow overlefthookarrow overrighthookarrow overleftharpoonup overleftharpoonup overrightarrow overleftarrow overleftrightarrow overleftbararrow overrightbararrow overbar overbrace overparent overbracket
$\overbar$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\text{\setupmathstackers}$ $\text{\textit{OPT}}$ 2 TEXT
$\overbrace$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\text{\setupmathstackers}$ $\text{\textit{OPT}}$ 2 TEXT
$\overbracket$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\text{\setupmathstackers}$ $\text{\textit{OPT}}$ 2 TEXT
$\overleftarrow$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\text{\setupmathstackers}$ $\text{\textit{OPT}}$ 2 TEXT

$$\overleftarrow{\hspace{1.5cm}} \quad [\dots,\dots\overset{1}{=}\dots,\dots] \quad \{\dots\overset{2}{\hspace{0.5cm}}\}$$

```
1 inherits: \setupmathstackers OPT
```

2 TEXT

$$\overleftarrow{\hspace{1.5cm}} \quad [\dots, \dots^1 = \dots, \dots] \quad \{\dots^2\}$$

```
1 inherits: \setupmathstackers OPT
```

2 TEXT

$$\overleftarrow{\hspace{1.5cm}} \quad [\dots,\dots\overset{1}{=}\dots,\dots] \quad \{\dots\overset{2}{\hspace{0.5cm}}\}$$

```
1 inherits: \setupmathstackersOPT
```

2 TEXT

$$\overleftarrow{\hspace{1.5cm}} \quad [\dots,\dots\overset{1}{=}\dots,\dots] \quad \{\dots\overset{2}{\hspace{0.5cm}}\}$$

```
1 inherits: \setupmathstackers OPT
```

2 TEXT

$$\overleftarrow{\hspace{.05cm}} \quad [\dots,\dots\overset{1}{=}\dots,\dots] \quad \{\dots\}^2$$

```
1 inherits: \setupmathstackers OPT
```

2 TEXT

$$\overleftarrow{\hspace{.05cm}}\hspace{.05cm}\uparrow \quad [\dots,\dots\overset{1}{=}\dots,\dots] \quad \{\dots\overset{2}{\}$$

```
1 inherits: \setupmathstackers OPT
```

2 TEXT

$$\overleftarrow{\hspace{0.5cm}} \quad [\dots,\dots\overset{1}{=}\dots,\dots] \quad \{\dots\overset{2}{.}\}$$

```
1 inherits: \setupmathstackers OPT
```

2 TEXT

$$\overleftrightarrow{\hspace{1cm}} \quad [\dots\overset{1}{=}\dots] \quad \{\dots\overset{2}{\}$$

```
1 inherits: \setupmathstackers OPT
```

2 TEXT

$$\overleftarrow{\hspace{1.5cm}} \quad [\dots,\dots\overset{1}{=}\dots,\dots] \quad \{\dots\overset{2}{\hspace{0.5cm}}\}$$

```
1 inherits: \setupmathstackers OPT
```

2 TEXT

$$\overparent{[\dots,\dots^1\dots,\dots] \quad \{\dots^2\}}$$

```
1 inherits: \setupmathstackersOPT
```

2 TEXT

$$\overrightarrow{\quad} \quad [\dots,\dots^1\dots,\dots] \quad \{\dots^2\}$$

```
1 inherits: \setupmathstackersOPT
```

2 TEXT

$$\overrightarrow{\hspace{1.5cm}} \quad [\dots,\dots\overset{1}{=}\dots,\dots] \quad \{\dots\overset{2}{\}$$

```
1 inherits: \setupmathstackers OPT
```

2 TEXT

$$\overrightarrow{\hspace{1.5cm}} \quad [\dots,\dots^1\dots,\dots] \quad \{\dots^2\}$$

```
1 inherits: \setupmathstackersOPT
```

2 TEXT

$$\overrightarrow{\hspace{1.5cm}} \quad [\dots,\dots\overset{1}{=}\dots,\dots] \quad \{\dots\overset{2}{\}$$

```
1 inherits: \setupmathstackers OPT
```

2 TEXT

$$\overrightarrow{\text{harpoon}} \quad [\dots, \dots \overset{1}{=} \dots, \dots] \quad \{\dots \overset{2}{.}\}$$

```
1 inherits: \setupmathstackers OPT
```

2 TEXT

$$\overrightarrow{\hspace{.1cm}} \quad [\dots,\dots\overset{1}{=}\dots,\dots] \quad \{\dots\overset{2}{.}\}$$
$$\overrightarrow{\hspace{1.5cm}} \quad [\dots\overset{1}{=}\dots] \quad \{\dots\overset{2}{\}$$
$$\overrightarrow{\hspace{1.5cm}} \quad [\dots\overset{1}{=}\dots] \quad \{\dots\overset{2}{\}$$
$$\overrightarrow{\hspace{1.5cm}} \quad [\dots,\dots\overset{1}{=}\dots,\dots] \quad \{\overset{2}{\dots}\}$$
$$\overrightarrow{\quad} \quad [\dots\dots\overset{1}{=}\dots\dots] \quad \{\dots\}$$
$$\mathop{\mathrm{vertext}} \quad \left[\begin{smallmatrix} 1 \\ \dots \end{smallmatrix} \right] \quad \left\{ \begin{smallmatrix} 2 \\ \dots \end{smallmatrix} \right\} \quad \left\{ \begin{smallmatrix} 3 \\ \dots \end{smallmatrix} \right\}$$
$$\backslash\mathrm{MATHOVERTEXTTEXTENSIBLE}\quad \{.\dots\}^1\quad \{.\dots\}^2$$
$$\overline{\text{text}} \quad \{ \overset{1}{\dots} \} \quad \{ \overset{2}{\dots} \}$$
$$\overbrace{\text{...}}^1 \quad \overbrace{\text{...}}^2$$

`\overbrackettext` $\{\dots\}^1$ $\{\dots\}^2$

$$\overparenttext \quad \{.\overset{1}{.}\} \quad \{.\overset{2}{.}\}$$
$$\overline{\{...\}}$$
$$\backslash \text{interiorset} \quad \{...\}$$
 $\backslash\mathrm{mathqed}$
$$\sqrt[\text{MATHRADICAL}]{\dots,\dots\overset{1}{=}\dots,\dots}\quad [\dots\overset{2}{\dots}] \quad \{\dots\overset{3}{\dots}\}$$

$\backslash$ annuity [...,\overset{1}{=},...] [...^2] {...^3} 1 inherits: \setupmathradical OPT 2 TEXT 3 CONTENT
$\backslash$ lannuity [...,\overset{1}{=},...] [...^2] {...^3} 1 inherits: \setupmathradical OPT 2 TEXT 3 CONTENT
$\backslash$ lbannuity [...,\overset{1}{=},...] [...^2] {...^3} 1 inherits: \setupmathradical OPT 2 TEXT 3 CONTENT
$\backslash$ lrannuity [...,\overset{1}{=},...] [...^2] {...^3} 1 inherits: \setupmathradical OPT 2 TEXT 3 CONTENT
$\backslash$ lrbannuity [...,\overset{1}{=},...] [...^2] {...^3} 1 inherits: \setupmathradical OPT 2 TEXT 3 CONTENT
$\backslash$ rannuity [...,\overset{1}{=},...] [...^2] {...^3} 1 inherits: \setupmathradical OPT 2 TEXT 3 CONTENT
$\backslash$ rbannuity [...,\overset{1}{=},...] [...^2] {...^3} 1 inherits: \setupmathradical OPT 2 TEXT 3 CONTENT
$\backslash$ rlannuity [...,\overset{1}{=},...] [...^2] {...^3} 1 inherits: \setupmathradical OPT 2 TEXT 3 CONTENT
$\backslash$ rlbannuity [...,\overset{1}{=},...] [...^2] {...^3} 1 inherits: \setupmathradical OPT 2 TEXT 3 CONTENT
$\backslash$ root [...,\overset{1}{=},...] [...^2] {...^3} 1 inherits: \setupmathradical OPT 2 TEXT 3 CONTENT
$\backslash$ sqrt [...,\overset{1}{=},...] [...^2] {...^3} 1 inherits: \setupmathradical OPT 2 TEXT 3 CONTENT
$\backslash$ mathrm
$\backslash$ mathrowanchored {...*} * NAME NUMBER
$\backslash$ mathscript

$\backslash\text{MATHSIMPLEALIGN}$ $[...,\overset{.1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathsimplealign}$ 2 CONTENT instances: equationsystem lequationsystem reequationsystem
$\backslash\text{equationsystem}$ $[...,\overset{.1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathsimplealign}$ 2 CONTENT
$\backslash\text{lequationsystem}$ $[...,\overset{.1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathsimplealign}$ 2 CONTENT
$\backslash\text{requationsystem}$ $[...,\overset{.1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathsimplealign}$ 2 CONTENT
$\backslash\text{mathsl}$
$\backslash\text{mathss}$
$\backslash\text{mathstacker}$ $[.^.]$ $\{...\}$ $\{...\}$ $\{...\}$ 1 reverse matematica ^{PT} text chemistry 2 NUMMER 3 TEXT 4 TEXT
$\backslash\text{mathsync}$ $\{.^. \}$ $\{.. \}$ 1 NAME 2 NUMMER
$\backslash\text{mathtext}$ $.. \overset{.1}{\text{OPT}}$ $\{.. \}$ 1 TEXT 2 TEXT
$\backslash\text{mathtextauto}$ $\{.^. \}$ $\{.. \}$ 1 TEXT 2 TEXT
$\backslash\text{MATHTEXT}$ $\{.^. \}$ * TEXT instances: mathtext mathtexttf mathtextit mathtextsl mathtextbf mathtextbi mathtextbs mathword mathwordtf mathwordit mathwordsl mathwordbf mathwordbi mathwordbs mathsplit mathsplittf mathsplitit mathsplitsl mathsplitbf mathsplitbi mathsplitbs
$\backslash\text{mathsplit}$ $\{.^. \}$ * TEXT
$\backslash\text{mathsplitbf}$ $\{.^. \}$ * TEXT
$\backslash\text{mathsplitbi}$ $\{.^. \}$ * TEXT
$\backslash\text{mathsplitbs}$ $\{.^. \}$ * TEXT
$\backslash\text{mathsplitit}$ $\{.^. \}$ * TEXT

$\backslash$ mathsplitsl {...} * TEXT
$\backslash$ mathsplittf {...} * TEXT
$\backslash$ mathtext {...} * TEXT
$\backslash$ mathtextbf {...} * TEXT
$\backslash$ mathtextbi {...} * TEXT
$\backslash$ mathtextbs {...} * TEXT
$\backslash$ mathtextit {...} * TEXT
$\backslash$ mathtextsl {...} * TEXT
$\backslash$ mathtexttf {...} * TEXT
$\backslash$ mathword {...} * TEXT
$\backslash$ mathwordbf {...} * TEXT
$\backslash$ mathwordbi {...} * TEXT
$\backslash$ mathwordbs {...} * TEXT
$\backslash$ mathwordit {...} * TEXT
$\backslash$ mathwordsl {...} * TEXT
$\backslash$ mathwordtf {...} * TEXT
$\backslash$ mathtf
$\backslash$ mathtriplet [¹ ...] { ² ...} { ³ ...} { ⁴ ...} 1 NAME OPT OPT OPT OPT 2 TEXT 3 TEXT 4 TEXT

$\underleftharpoonup$ $[...,\overset{1}{=},...]$ $\{...\}$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT
$\underlefthookarrow$ $[...,\overset{1}{=},...]$ $\{...\}$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT
$\underleftrightarrow$ $[...,\overset{1}{=},...]$ $\{...\}$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT
$\underlefttarrow$ $[...,\overset{1}{=},...]$ $\{...\}$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT
$\underparent$ $[...,\overset{1}{=},...]$ $\{...\}$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT
$\underrightarrow$ $[...,\overset{1}{=},...]$ $\{...\}$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT
$\underrightarrowbar$ $[...,\overset{1}{=},...]$ $\{...\}$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT
$\underrightarrow$ $[...,\overset{1}{=},...]$ $\{...\}$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT
$\underrightbararrow$ $[...,\overset{1}{=},...]$ $\{...\}$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT
$\underrightharpoondown$ $[...,\overset{1}{=},...]$ $\{...\}$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT
$\underrightharpoonup$ $[...,\overset{1}{=},...]$ $\{...\}$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT
$\underrighthookarrow$ $[...,\overset{1}{=},...]$ $\{...\}$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT
$\underrighttarrow$ $[...,\overset{1}{=},...]$ $\{...\}$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT
$\undertwoheadleftarrow$ $[...,\overset{1}{=},...]$ $\{...\}$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT
$\undertwoheadrightarrow$ $[...,\overset{1}{=},...]$ $\{...\}$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT

$\mathbf{\text{undertext}}$ $[...]$ $\{...\}^2$ $\{...\}^3$ 1 subsol OPT 2 TEXT 3 TEXT
$\mathbf{\text{undertexttextensib}}$ $\{...\}^1$ $\{...\}^2$ 1 TEXT 2 TEXT instances: underbartext underbracetext underparenttext underbrackettext
$\mathbf{\text{underbartext}}$ $\{...\}^1$ $\{...\}^2$ 1 TEXT 2 TEXT
$\mathbf{\text{underbracetext}}$ $\{...\}^1$ $\{...\}^2$ 1 TEXT 2 TEXT
$\mathbf{\text{underbrackettext}}$ $\{...\}^1$ $\{...\}^2$ 1 TEXT 2 TEXT
$\mathbf{\text{underparenttext}}$ $\{...\}^1$ $\{...\}^2$ 1 TEXT 2 TEXT
$\mathbf{\text{MATHUNDER}}$ $\{...\}^*$ * TEXT
$\mathbf{\text{MATHUNSTACKED}}$ instances: impliedby implies iff impliesby And
$\mathbf{\text{And}}$
$\mathbf{\text{iff}}$
$\mathbf{\text{impliedby}}$
$\mathbf{\text{implies}}$
$\mathbf{\text{impliesby}}$
$\mathbf{\text{mathupright}}$
$\mathbf{\text{math}}$ $[...,\dots,\dots,\dots]$ $\{...\}^2$ 1 inherits: setupmathematics 2 CONTENT
$\mathbf{\text{matrix}}$ $\{...\}^*$ * CONTENT
$\mathbf{\text{maxaligned}}$ $\{...\}^*$ * CONTENT
$\mathbf{\text{mbinsync}}$ $\{...\}^1$ $\{...\}^2$ 1 NAME 2 NUMMER

$\backslash\mathrm{mbox}$ {...} * CONTENT
$\backslash\mathrm{measure}$ {...} * NAME
$\backslash\mathrm{measured}$ {...} * NAME
$\backslash\mathrm{medbreak}$
$\backslash\mathrm{mediu}$ [...] * FILE
$\backslash\mathrm{mediu}$... * FILE
$\backslash\mathrm{medskip}$
$\backslash\mathrm{medspace}$
$\backslash\mathrm{menuinteractiune}$ [¹ ...] [..., ² ...] 1 NAME OPT 2 inherits: \seteazamenuinteractiune
$\backslash\mathrm{message}$ {...} * TEXT
$\backslash\mathrm{mfence}$... * \vert \singleverticalbar \doubleverticalbar \tripleverticalbar \mvert \mVert
$\backslash\mathrm{mfunction}$ [..., ¹ ...] 1 inherits: \setupmathfunctions 2 NAME
$\backslash\mathrm{mfunctionlabeltext}$ {...} * NAME
$\backslash\mathrm{mfunction}$ [..., ¹ ...] 1 inherits: \setupmathfunctions 2 NAME
$\backslash\mathrm{mhbox}$ {...} * CONTENT
$\backslash\mathrm{mic}$
$\backslash\mathrm{micaldin}$
$\backslash\mathrm{micaldininclinat}$
$\backslash\mathrm{micinclinat}$
$\backslash\mathrm{micinclinataldin}$
$\backslash\mathrm{micitalic}$

<code>\micriticaldin</code>
<code>\micnormal</code>
<code>\mictype</code>
<code>\middlealigned {...}</code> <code>* CONTENT</code>
<code>\middlebox {...}</code> <code>* CONTENT</code>
<code>\middleparbox [..¹..] {...²}</code> <code>1 global OPT</code> <code>2 CONTENT</code>
<code>\midhbox {...}</code> <code>* CONTENT</code>
<code>\midsubsentence</code>
<code>\minimalhbox ..¹ {...²}</code> <code>1 TEXT OPT</code> <code>2 CONTENT</code>
<code>\mixedcaps {...}</code> <code>* TEXT</code>
<code>\mkvibuffer [...]</code> <code>* BUFFER OPT</code>
<code>\mkvibuffer {...}</code> <code>* BUFFER</code>
<code>\moduleparameter {...¹} {...²}</code> <code>1 FILE</code> <code>2 KEY</code>
<code>\molecule {...}</code> <code>* CONTENT</code>
<code>\mono</code>
<code>\monoaldin</code>
<code>\mononormal</code>
<code>\monthlong {...}</code> <code>* NUMMER</code>
<code>\monthshort {...}</code> <code>* NUMMER</code>
<code>\mordsync {...¹} {...²}</code> <code>1 NAME</code> <code>2 NUMMER</code>

<code>\morehyphens</code>
<code>\movedownsidefloat [...*...]</code> <code>* [-+]linie [-+]2*line [-+]suspenda</code>
<code>\movesidefloat [...*...]</code> <code>* [-+]linie [-+]2*line [-+]suspenda</code>
<code>\movesidefloat [...*...]</code> <code>* x = DIMENSION</code> <code>y = DIMENSION</code>
<code>\mparagraph [...¹...]{...²}</code> <code>1 inherits: \setezainconjurat</code> <code>2 CONTENT</code>
<code>\mplocation {...}</code> <code>* stanga dreapta intern extern</code>
<code>\mprandomnumber</code>
<code>\mrelsync {...¹}{...²}</code> <code>1 NAME</code> <code>2 NUMMER</code>
<code>\mscaledtext {...}</code> <code>* CONTENT</code>
<code>\mstack {...*...}</code> <code>* TEXT</code>
<code>\mtext {...}</code> <code>* CONTENT</code>
<code>\mtp {...}</code> <code>* CONTENT</code>
<code>\mx</code>
<code>\mxx</code>
<code>\m [...¹...]{...²}</code> <code>1 inherits: \TeX\Setupmathematics</code> <code>2 CONTENT</code>
<code>\NormalizeFontHeight \...¹ {...²} {...³} {...⁴}</code> <code>1 CSNAME</code> <code>2 TEXT</code> <code>3 DIMENSION</code> <code>4 FONT</code>
<code>\NormalizeFontWidth \...¹ {...²} {...³} {...⁴}</code> <code>1 CSNAME</code> <code>2 TEXT</code> <code>3 DIMENSION</code> <code>4 FONT</code>

<code>\NormalizeTextHeight</code> <code>{¹...}</code> <code>{²...}</code> <code>{³...}</code> 1 FONT 2 DIMENSION 3 TEXT
<code>\NormalizeTextWidth</code> <code>{¹...}</code> <code>{²...}</code> <code>{³...}</code> 1 FONT 2 DIMENSION 3 TEXT
<code>\Numere</code> <code>{[*]...}</code> * NUMMER
<code>\Numereromane</code> <code>{[*]...}</code> * NUMMER
<code>\namedanchorbox</code> <code>{[*]...}</code> * NAME
<code>\namedboxanchor</code> <code>{[*]...}</code> * NAME NUMMER
<code>\namedCOMANDAhsh</code> <code>{[*]...}</code> * NAME
<code>\namedCOMANDApameter</code> <code>{¹...}</code> <code>{²...}</code> 1 NAME 2 KEY
<code>\namedgoto</code> <code>[¹...]</code> <code>{²...}</code> <code>[³...]</code> 1 NAME 2 CONTENT 3 REFERENCE
<code>\namedheadnumber</code> <code>{[*]...}</code> * ABSCHNITT
<code>\namedstructureheadlocation</code> <code>{[*]...}</code> * ABSCHNITT
<code>\namedstructureuservariable</code> <code>{¹...}</code> <code>{²...}</code> 1 ABSCHNITT 2 KEY
<code>\namedstructurevariable</code> <code>{¹...}</code> <code>{²...}</code> 1 ABSCHNITT 2 KEY
<code>\namedtaggedlabeltexts</code> <code>{¹...}</code> <code>{²...}</code> <code>{³...}</code> <code>{⁴...}</code> <code>{⁵...}</code> 1 NAME 2 NAME 3 NAME 4 NAME 5 CONTENT
<code>\namespacedboxanchor</code> <code>{[*]...}</code> * NAME NUMMER
<code>\naturalhbox</code> <code>¹..._{OPT}</code> <code>{²...}</code> 1 TEXT 2 CONTENT

<code>\naturalhpack</code> $\overset{1}{...}$ $\{ \overset{2}{...} \}$ 1 TEXT OPT 2 CONTENT
<code>\naturaltpack</code> $\overset{1}{...}$ $\{ \overset{2}{...} \}$ 1 TEXT OPT 2 CONTENT
<code>\naturalvbox</code> $\overset{1}{...}$ $\{ \overset{2}{...} \}$ 1 TEXT OPT 2 CONTENT
<code>\naturalvcenter</code> $\overset{1}{...}$ $\{ \overset{2}{...} \}$ 1 TEXT OPT 2 CONTENT
<code>\naturalvpack</code> $\overset{1}{...}$ $\{ \overset{2}{...} \}$ 1 TEXT OPT 2 CONTENT
<code>\naturalvtop</code> $\overset{1}{...}$ $\{ \overset{2}{...} \}$ 1 TEXT OPT 2 CONTENT
<code>\naturalwd</code> $\overset{*}{...}$ * CSNAME NUMBER
<code>\necunoscut</code>
<code>\negatecolorbox</code> $\overset{*}{...}$ * CSNAME NUMBER
<code>\negated</code> $\{ \overset{*}{...} \}$ * TEXT
<code>\negemspace</code>
<code>\negenspace</code>
<code>\negthinspace</code>
<code>\newattribute</code> $\backslash \overset{*}{...}$ * CSNAME
<code>\newboundary</code> $\backslash \overset{*}{...}$ * CSNAME
<code>\newcatcodetable</code> $\backslash \overset{*}{...}$ * CSNAME
<code>\newcounter</code> $\backslash \overset{*}{...}$ * CSNAME
<code>\newevery</code> $\backslash \overset{1}{...}$ $\backslash \overset{2}{...}$ 1 CSNAME 2 CSNAME
<code>\newfrenchspacing</code>

<code>\newluatable</code> <code>*..</code> * CSNAME
<code>\newmode</code> <code>{*..}</code> * NAME
<code>\newrepeatablerandom</code> <code>\¹..</code> <code>{*²..}</code> 1 CSNAME 2 NUMMER
<code>\newsignal</code> <code>*..</code> * CSNAME
<code>\newsystemmode</code> <code>{*..}</code> * NAME
<code>\nextbox</code>
<code>\nextboxdp</code>
<code>\nextboxht</code>
<code>\nextboxhtdp</code>
<code>\nextboxwd</code>
<code>\nextcounter</code> <code>[.¹..]</code> <code>[.²..]</code> 1 NAME OPT 2 NUMMER
<code>\nextcountervalue</code> <code>[*..]</code> * NAME
<code>\nextdepth</code>
<code>\nextparagraphs</code>
<code>\urmatorulPARAGRAPHS</code>
<code>\nextrealpage</code>
<code>\nextrealpagenumber</code>
<code>\nextsubcountervalue</code> <code>[.¹..]</code> <code>[.²..]</code> 1 NAME 2 NUMMER
<code>\nextsubpagenumber</code>
<code>\nextuserpage</code>
<code>\nextuserpagenumber</code>
<code>\nm</code> <code>{*..}</code> * CONTENT

<code>\noapostrophes</code>
<code>\nobar {...}</code> * CONTENT
<code>\nobigmath</code>
<code>\nobreak</code>
<code>\nocasing {...}</code> * CONTENT
<code>\nocharacteralign</code>
<code>\nocitation [...]</code> * REFERENCE
<code>\nocitation {...}</code> * REFERENCE
<code>\nocite [...]</code> * REFERENCE
<code>\nocite {...}</code> * REFERENCE
<code>\nodepthstrut</code>
<code>\nodetostring \.^{.1} {.^{.2}}</code> 1 CSNAME 2 CONTENT
<code>\noexplicithyphens</code>
<code>\nofdetachedinsertions ...</code> * NUMBER
<code>\nofigurepages</code>
<code>\noflines</code>
<code>\noflinesinbox ...</code> * CSNAME NUMBER
<code>\noflocalfloats</code>
<code>\nohbreak</code>
<code>\noheightstrut</code>
<code>\nohyphencollapsing</code>
<code>\nohyphens</code>
<code>\noindentation</code>

<code>\noitaliccorrection</code>
<code>\noitem</code>
<code>\nokap {...}</code> <code>* TEXT</code>
<code>\nokerning</code>
<code>\noleftkerning</code>
<code>\noleftligaturing</code>
<code>\noligaturing</code>
<code>\nonfrenchspacing</code>
<code>\nonmathematics {...}</code> <code>* CONTENT</code>
<code>\nonpenalizedspacing</code>
<code>\nonvalidassignment {...}</code> <code>* TEXT</code>
<code>\noorphans</code>
<code>\norightkerning</code>
<code>\norightligaturing</code>
<code>\normal</code>
<code>\normalboldface</code>
<code>\normalframedwithsettings [...¹...²...] {...}</code> <code>1 inherits: \seteazainconjurat</code> <code>2 CONTENT</code>
<code>\normalitalicface</code>
<code>\normalizebodyfontsize \...¹ {...²}</code> <code>1 CSNAME</code> <code>2 DIMENSION</code>
<code>\normalizedfontsize</code>
<code>\normalizefontdepth \...¹ {...²} {...³} {...⁴}</code> <code>1 CSNAME</code> <code>2 TEXT</code> <code>3 DIMENSION</code> <code>4 FONT</code>

<pre> \normalizefontheight \.^{.2} {.^3} {.^4} 1 CSNAME 2 TEXT 3 DIMENSION 4 FONT </pre>
<pre> \normalizefontline \.^{.2} {.^3} {.^4} 1 CSNAME 2 TEXT 3 DIMENSION 4 FONT </pre>
<pre> \normalizefontwidth \.^{.2} {.^3} {.^4} 1 CSNAME 2 TEXT 3 DIMENSION 4 FONT </pre>
<pre> \normalizetextdepth {...} {...} {...} 1 FONT 2 DIMENSION 3 TEXT </pre>
<pre> \normalizetextheight {...} {...} {...} 1 FONT 2 DIMENSION 3 TEXT </pre>
<pre> \normalizetextline {...} {...} {...} 1 FONT 2 DIMENSION 3 TEXT </pre>
<pre> \normalizetextwidth {...} {...} {...} 1 FONT 2 DIMENSION 3 TEXT </pre>
<pre> \normalslantedface </pre>
<pre> \normaltypeface </pre>
<pre> \nota [...] [...] 1 NAME OPT 2 REFERENCE </pre>
<pre> \NOTE [...,^1,...] {...} 1 REFERENCE OPT 2 TEXT instances: footnote endnote mathnote publicationnote </pre>
<pre> \NOTE [...,.*,...] * titlu = TEXT semncarte = TEXT lista = TEXT referinta = REFERENCE referencetext = TEXT instances: footnote endnote mathnote publicationnote </pre>
<pre> \endnote [...,.*,...] * titlu = TEXT semncarte = TEXT lista = TEXT referinta = REFERENCE referencetext = TEXT </pre>

<code>\footnote</code> [...,.. [*] ...,..] * titlu = TEXT semncarte = TEXT lista = TEXT referinta = REFERENCE referencetext = TEXT
<code>\mathnote</code> [...,.. [*] ...,..] * titlu = TEXT semncarte = TEXT lista = TEXT referinta = REFERENCE referencetext = TEXT
<code>\publicationnote</code> [...,.. [*] ...,..] * titlu = TEXT semncarte = TEXT lista = TEXT referinta = REFERENCE referencetext = TEXT
<code>\endnote</code> [...,.. ¹] {... ² .} 1 REFERENCE OPT 2 TEXT
<code>\footnote</code> [...,.. ¹] {... ² .} 1 REFERENCE OPT 2 TEXT
<code>\mathnote</code> [...,.. ¹] {... ² .} 1 REFERENCE OPT 2 TEXT
<code>\publicationnote</code> [...,.. ¹] {... ² .} 1 REFERENCE OPT 2 TEXT
<code>\notesymbol</code> [... ¹] [... ² .] 1 NAME OPT 2 REFERENCE
<code>\notoddlers</code>
<code>\notragged</code>
<code>\notwins</code>
<code>\novbreak</code>
<code>\ntimes</code> {... ¹ .} {... ² .} 1 TEXT 2 NUMMER
<code>\numarformula</code> [...,.. [*] ...] * REFERENCE OPT
<code>\numarpagina</code>
<code>\numartitlu</code> [... ¹ .] [... ² .] 1 ABSCHNITT OPT 2 precedent curent urmatorul primul ultim

<code>\numartitlucurent</code>
<code>\numberhere [...,*¹...,...]</code> <code>* titlu = TEXT ^{OPT}</code> <code> referinta = + - REFERENCE</code> <code> semncarte = TEXT</code> <code> lista = TEXT</code> <code> suffix = TEXT</code>
<code>\numberhere [...,*¹...,...]</code> <code>* + - REFERENCE ^{OPT}</code>
<code>\numberofpoints {...}</code> <code>* DIMENSION</code>
<code>\numere {...}</code> <code>* NUMMER</code>
<code>\numereromane {...}</code> <code>* NUMMER</code>
<code>\obeydepth</code>
<code>\objectdepth</code>
<code>\objectheight</code>
<code>\objectmargin</code>
<code>\objectreference {...¹} {...²}</code> <code>1 NAME</code> <code>2 NAME</code>
<code>\objectreferencepage {...¹} {...²}</code> <code>1 NAME</code> <code>2 NAME</code>
<code>\objectwidth</code>
<code>\obox {...}</code> <code>* CONTENT</code>
<code>\octnumber {...}</code> <code>* NUMMER</code>
<code>\octstringtonumber {...}</code> <code>* NUMMER</code>
<code>\offset [...,*¹...,...]¹ {...²}</code> <code>1 inherits: \setup^{OPT}offset</code> <code>2 CONTENT</code>
<code>\offsetbox [...,*¹...,...]¹ \...² {...³}</code> <code>1 inherits: \setup^{OPT}offsetbox</code> <code>2 CSNAME</code> <code>3 CONTENT</code>
<code>\olinie [...]</code> <code>* REFERENCE</code>

<code>\onedigitrounding {...}</code> * NUMBER
<code>\optimize [...]</code> * +line -line flushleft flushright normal NAME
<code>\optimize [...,...*=...]</code> * inherits: \setuptoptimize
<code>\optionalword</code>
<code>\ordinaldaynumber {...}</code> * NUMBER
<code>\ordinalstr {...}</code> * TEXT
<code>\ornamenttext [...,...¹...]</code> <code>[...,...²...]</code> <code>{...³}</code> <code>{...⁴}</code> 1 alternativ = a b inherits: \setupcollector 2 stil = STYLE BEFEHL culoare = COLOR inherits: \seteazainconjurat 3 TEXT 4 CONTENT
<code>\ornamenttext [...¹] {...²} {...³}</code> 1 NAME 2 TEXT 3 CONTENT
<code>\ornamenttext [...,...¹...]</code> <code>[...,...²...]</code> <code>{...³}</code> <code>{...⁴}</code> 1 alternativ = a b inherits: \setupplayer 2 inherits: \setuplayeredtext 3 TEXT 4 CONTENT
<code>\ORNAMENT {...¹} {...²}</code> 1 TEXT 2 CONTENT
<code>\outputfilename</code>
<code>\outputstreambox [...]</code> * NAME
<code>\outputstreamcopy [...]</code> * NAME
<code>\outputstreamunvbox [...]</code> * NAME
<code>\outputstreamunvcopy [...]</code> * NAME
<code>\over [...]</code> * REFERENCE

<code>\overlayanchorbox</code> <code>{...}</code> * NAME
<code>\overlaybutton</code> <code>[...]</code> * REFERENCE
<code>\overlaybutton</code> <code>{...}</code> * REFERENCE
<code>\overlaycolor</code>
<code>\overlaydepth</code>
<code>\overlayfigure</code> <code>{...}</code> * FILE
<code>\overlayheight</code>
<code>\overlayimage</code> <code>{...}</code> * FILE
<code>\overlaylinecolor</code>
<code>\overlaylinewidth</code>
<code>\overlayoffset</code>
<code>\overlayrollbutton</code> <code>[¹...]</code> <code>[²...]</code> 1 REFERENCE 2 REFERENCE
<code>\overlaywidth</code>
<code>\overloaderror</code>
<code>\overset</code> <code>{¹...}</code> <code>{²...}</code> 1 TEXT 2 TEXT
<code>\PDFcolor</code> <code>{...}</code> * NAME
<code>\PDFETEX</code>
<code>\PDFhighlight</code> <code>[¹...]</code> <code>[²...]</code> <code>{³...}</code> 1 NAME 2 TEXT 3 TEXT
<code>\PDFTEX</code>
<code>\Periodic</code> <code>{...}</code> * TEXT
<code>\PICTEX</code>

<code>\PiTeX</code>
<code>\PointsToBigPoints {...} \.^{2}...</code> 1 DIMENSION 2 CSNAME
<code>\PointsToReal {...} \.^{2}...</code> 1 DIMENSION 2 CSNAME
<code>\PointsToWholeBigPoints {...} \.^{2}...</code> 1 DIMENSION 2 CSNAME
<code>\PPCHTEX</code>
<code>\PPCHTeX</code>
<code>\PRAGMA</code>
<code>\PtToCm {...}</code> * DIMENSION
<code>\pagearea [...]¹ [...]² [...]³</code> 1 sus antet text subsol ^{OPT} subsol 2 text margine bordura 3 stanga dreapta textstanga middletext textdreapta
<code>\pageblockrealpage {...}</code> * NAME
<code>\pagebreak [...]*;...]</code> * gol antet subsol dummy incadrat NUMMER +NUMMER implicit reset dezactivat da nu marcaj blank preferinta preferintamare stanga dreapta par impar cvadрупul ultim ultimapagina start stop xy note NAME
<code>\pagefigure [...]¹ [...,...]²...]</code> 1 FILE 2 offset = implicit overlay niciunul DIMENSION
<code>\pageinjection [...]¹ [...,...]²...]</code> 1 NAME 2 KEY = VALUE
<code>\pageinjection [...,...]¹...]</code> 1 inherits: \setuppageinjection 2 KEY = VALUE
<code>\pagelayout [...]</code> * pagina paginastanga paginadreapta
<code>\pagestaterealpage {...}¹ {...}²</code> 1 NAME 2 NAME NUMMER
<code>\pagestaterealpageorder {...}¹ {...}²</code> 1 NAME 2 NAME NUMMER

\pagina [...[*]...] * inherits: \page^{OPT}break
\paletsize
\PARAGRAPHS
\parbreak
\PARINSERT [...¹...²...] {...} 1 inherits: \setupparin^{OPT}sert 2 CONTENT instances: leftparinsert rightparinsert
\leftparinsert [...¹...²...] {...} 1 inherits: \setupparinsert^{OPT} 2 CONTENT
\rightparinsert [...¹...²...] {...} 1 inherits: \setupparinsert^{OPT} 2 CONTENT
\pastreazablocuri [...¹...] [...²...]^{OPT} 1 NAME 2 NAME
\pbsp
\pdfactualtext {...¹} {...²} 1 CONTENT 2 TEXT
\pdfalternativetext {...¹} {...²} 1 CONTENT 2 TEXT
\pdfbackendactualtext {...¹} {...²} 1 CONTENT 2 TEXT
\pdfbackendalternativetext {...¹} {...²} 1 CONTENT 2 TEXT
\pdfbackendcurrentresources
\pdfbackendsetcatalog {...¹} {...²} 1 NAME 2 TEXT
\pdfbackendsetcolorspace {...¹} {...²} 1 NAME 2 TEXT
\pdfbackendsettextgstate {...¹} {...²} 1 NAME 2 TEXT

<code>\pdfbackendsetinfo</code> $\{\dots\}$ $\{\dots\}$ 1 NAME 2 TEXT
<code>\pdfbackendsetname</code> $\{\dots\}$ $\{\dots\}$ 1 NAME 2 TEXT
<code>\pdfbackendsetpageattribute</code> $\{\dots\}$ $\{\dots\}$ 1 NAME 2 TEXT
<code>\pdfbackendsetpageresource</code> $\{\dots\}$ $\{\dots\}$ 1 NAME 2 TEXT
<code>\pdfbackendsetpagesattribute</code> $\{\dots\}$ $\{\dots\}$ 1 NAME 2 TEXT
<code>\pdfbackendsetpattern</code> $\{\dots\}$ $\{\dots\}$ 1 NAME 2 TEXT
<code>\pdfbackendsetshade</code> $\{\dots\}$ $\{\dots\}$ 1 NAME 2 TEXT
<code>\pdfcolor</code> $\{\dots\}$ * NAME
<code>\pdfeTeX</code>
<code>\pdfsetuserdata</code>
<code>\pdfTeX</code>
<code>\pelung</code> $\{\dots\}$ * NAME
<code>\penalizedspacing</code>
<code>\percent</code>
<code>\percentdimen</code> $\{\dots\}$ $\{\dots\}$ 1 DIMENSION CSNAME 2 DIMENSION NUMMER%
<code>\periodic</code> $\{\dots\}$ * TEXT
<code>\permitcaretescape</code>
<code>\permitcircumflexescape</code>
<code>\permitspacesbetweengroups</code>

<code>\persiandecimals</code> <code>{...}</code> * NUMBER
<code>\persiannumerals</code> <code>{...}</code> * NUMBER
<code>\phantom</code> <code>{...}</code> * CONTENT
<code>\phantombox</code> <code>[...[*]...]</code> * <code>latime</code> = DIMENSION <code>inaltime</code> = DIMENSION <code>inaltime</code> = DIMENSION
<code>\pickupgroupedcommand</code> <code>{...¹}</code> <code>{...²}</code> <code>{...³}</code> 1 BEFEHL 2 BEFEHL 3 BEFEHL
<code>\pickupgroupedcommandcs</code> <code>\...¹</code> <code>\...²</code> <code>\...³</code> 1 CSNAME 2 CSNAME 3 CSNAME
<code>\pickupparinsert</code>
<code>\placeattachments</code>
<code>\placebalancing</code> <code>[...¹]</code> <code>[...²...]</code> 1 NAME 2 inherits: \setupbalancing
<code>\placebtxrendering</code> <code>[...¹]</code> <code>[...²...]</code> 1 NAME 2 inherits: \setupbtxrendering
<code>\placecitation</code> <code>[...]</code> * REFERENCE
<code>\placecomments</code>
<code>\placecurrentformulanumber</code>
<code>\placedbox</code> <code>{...}</code> * CONTENT
<code>\placefloat</code> <code>[...¹]</code> <code>[...²...]</code> <code>[...³...]</code> <code>{...⁴}</code> <code>{...⁵}</code> 1 SINGULAR 2 <code>split</code> <code>keepetogether</code> <code>totdeauna</code> <code>stanga</code> <code>dreapta</code> <code>intern</code> <code>extern</code> <code>spatiuspate</code> <code>cutspace</code> <code>instanga</code> <code>indreapta</code> <code>inmargine</code> <code>marginestanga</code> <code>marginedreapta</code> <code>bordurastanga</code> <code>borduradreapta</code> <code>innermargin</code> <code>outermargin</code> <code>inneredge</code> <code>outeredge</code> <code>text</code> <code>opus</code> <code>reset</code> <code>inaltime</code> <code>adancime</code> <code>[-+]linie</code> <code>jumatatelinie</code> <code>grila</code> <code>inalt</code> <code>jos</code> <code>ajustat</code> <code>tight</code> <code>tolerant</code> <code>foartetolerant</code> <code>90</code> <code>180</code> <code>270</code> <code>nonumber</code> <code>niciunul</code> <code>local</code> <code>aici</code> <code>fortat</code> <code>margine</code> <code>[-+]suspenda</code> <code>suspendat</code> <code>inalt</code> <code>ambele</code> <code>centru</code> <code>offset</code> <code>sus</code> <code>subsol</code> <code>auto</code> <code>pagina</code> <code>paginastanga</code> <code>paginadreapta</code> <code>paragraf</code> <code>undeva</code> <code>effective</code> <code>antet</code> <code>subsol</code> <code>tblr</code> <code>lrtb</code> <code>tblr</code> <code>rltb</code> <code>fxbt</code> <code>btlr</code> <code>lrbt</code> <code>btrl</code> <code>rlbt</code> <code>fxbt</code> <code>fixd</code> <code>append</code> 3 REFERENCE 4 TEXT 5 CONTENT

\placefloatcaption [...¹] [...,²...,...] [...,³...,...] 1 NAME 2 titlu = TEXT semncarte = TEXT marcaje = TEXT lista = TEXT referinta = REFERENCE referencetext = TEXT 3 KEY = VALUE
\placefloatplaceholder
\placefloatwithsetups [...¹] [...,²...,...] [...,³...,...] {...⁴} {...⁵} 1 NAME 2 split keeptogether totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmargine marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat tight tolerant foartetolerant 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta paragraf undeva effective antet subsol tblr lrtb tblr lrtb fxtb btlr lrbt btrl rlbt fxbt fixd append 3 REFERENCE 4 TEXT 5 CONTENT
\puneFLOAT [...,¹...] [...,²...] {...³} {...⁴} 1 split keeptogether^{OPT}totdeauna stanga^{OPT}dreapta intern extern spatiuspate cutspace instanga indreapta inmargine marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat tight tolerant foartetolerant 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta paragraf undeva effective antet subsol tblr lrtb tblr lrtb fxtb btlr lrbt btrl rlbt fxbt fixd append 2 REFERENCE 3 TEXT 4 CONTENT instances: chemical figure table intermezzo graphic
\punechemical [...,¹...] [...,²...] {...³} {...⁴} 1 split keeptogether totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmargine marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat tight tolerant foartetolerant 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta paragraf undeva effective antet subsol tblr lrtb tblr lrtb fxtb btlr lrbt btrl rlbt fxbt fixd append 2 REFERENCE 3 TEXT 4 CONTENT
\punefigure [...,¹...] [...,²...] {...³} {...⁴} 1 split keeptogether totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmargine marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat tight tolerant foartetolerant 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta paragraf undeva effective antet subsol tblr lrtb tblr lrtb fxtb btlr lrbt btrl rlbt fxbt fixd append 2 REFERENCE 3 TEXT 4 CONTENT
\punegraphic [...,¹...] [...,²...] {...³} {...⁴} 1 split keeptogether totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmargine marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat tight tolerant foartetolerant 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta paragraf undeva effective antet subsol tblr lrtb tblr lrtb fxtb btlr lrbt btrl rlbt fxbt fixd append 2 REFERENCE 3 TEXT 4 CONTENT

\puneintermezzo [...,¹...] [...,²...] {...³} {...⁴} 1 split keep together totde^{OPT}una stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmargin marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat tight tolerant foartetolerant 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta paragraf undeva effective antet subsol tblr lrtb tblr lrtb fxtb btlr lrbt btrl rlbt fxbt fixd append 2 REFERENCE 3 TEXT 4 CONTENT
\punetable [...,¹...] [...,²...] {...³} {...⁴} 1 split keep together^{OPT}totdeauna stanga^{OPT}dreapta intern extern spatiuspate cutspace instanga indreapta inmargin marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat tight tolerant foartetolerant 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta paragraf undeva effective antet subsol tblr lrtb tblr lrtb fxtb btlr lrbt btrl rlbt fxbt fixd append 2 REFERENCE 3 TEXT 4 CONTENT
\placeframed [...¹] [...,²...,...] {...³} 1 NAME ^{OPT} 2 inherits: \seteazainconjurat 3 CONTENT
\placeheadnumber [...] * ABSCHNITT
\placeheadtext [...] * ABSCHNITT
\placehelp
\placeholder [...] * NAME
\placeinitial [...] * NAME ^{OPT}
\placelayer [...] * NAME
\placelayeredtext [...¹] [...,²...,...] [...,³...,...] {...⁴} {...⁵} 1 NAME ^{OPT} ^{OPT} 2 inherits: \setuplayer 3 inherits: \setuplayeredtext 4 TEXT 5 CONTENT
\placelistofFLOATS [...,[*]...,...] * inherits: \seteazalista ^{OPT} instances: chemicals figures tables intermezzi graphics
\placelistofchemicals [...,[*]...,...] * inherits: \seteazalista ^{OPT}
\placelistoffigures [...,[*]...,...] * inherits: \seteazalista ^{OPT}
\placelistofgraphics [...,[*]...,...] * inherits: \seteazalista ^{OPT}

```
* inherits: \seteazalista
```

```
* inherits: \seteazalista
```

```
1 NAME
2 inherits: \setupbtxrendering
```

```
1 SINGULAR
2 inherits: \seteazasortare
```

```
* inherits: \seteazasortare
instances: logos
```

```
* inherits: \seteazasortare
```

```
1 SINGULAR
2 inherits: \seteazasinonime
```

```
* inherits: \seteazasinonime
instances: abbreviations
```

```
* inherits: \seteazasinonime
```

```
1  NAME
2  inherits: \setupnote
```

```
1  NAME
2  inherits: \setupplacement
3  CONTENT
```

```
1 inherits: \setupplacement
2 CONTENT
```

1	NAME
2	REFERENCE

```

1  + - REFERENCE
2  TEXT
3  TEXT

```

```
1  NAME
2  inherits: \setupnote
```

\placepairedbox [¹...] [...,²..._{OPT},...] {...³} {...⁴} 1 NAME 2 inherits: \setuppairedbox 3 CONTENT 4 TEXT
\punePAIREDBOX [...,¹..._{OPT},...] {...²} {...³} 1 inherits: \setuppairedbox_{OPT} 2 CONTENT 3 TEXT instances: legend
\punelegend [...,¹..._{OPT},...] {...²} {...³} 1 inherits: \setuppairedbox_{OPT} 2 CONTENT 3 TEXT
\placeparallel [¹...] [...,²...] [...,³..._{OPT},...] 1 NAME 2 NAME 3 inherits: \setupparallel
\placerawheaddata [...[*]] * ABSCHNITT
\placerawheadnumber [...[*]] * ABSCHNITT
\placerawheadtext [...[*]] * ABSCHNITT
\placerawlist [¹...] [...,²..._{OPT},...] 1 LISTE 2 inherits: \seteazalista
\placereadingwindow [¹...] [...²]_{OPT} 1 NAME 2 NAME
\placesavedfloat [¹...] [...²] [...,³..._{OPT},...] 1 NAME 2 REFERENCE 3 titlu = TEXT semncarte = TEXT marcaje = TEXT lista = TEXT locatie = split keep together totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmargin marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat tight tolerant foartetolerant 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta paragraf undeva effective antet subsol tblr lrtb tblr rltb fxtb btlr lrbt btrl rltb fxbt fixd append referinta = REFERENCE referencetext = TEXT
\placesynchronize [¹...] [...,²..._{OPT},...] 1 NAME 2 inherits: \setupsynchronize
\plainmatrix {...[*]} * CONTENT

<code>\plaseazapeggrid</code> [¹...] {²...} 1 normal standard da strîct tolerant sus subsol ambele broad ajustat primul ultim inalt unu jos niciunul linie strut box min max centru math math:linie math:jumatatelinie math:-line math:-halfline NAME 2 CONTENT
<code>\plaseazapeggrid</code> [...¹;...] {²...} 1 inherits: \definegridsnapping 2 CONTENT
<code>\plaseazasemnecarte</code> [...¹;...] [...²;...] [...³;...] [...⁴;...] 1 ABSCHNITT LISTE OPT OPT OPT 2 ABSCHNITT LISTE 3 inherits: \setupbookmark
<code>\popattribute</code> *... * CSNAME
<code>\popmacro</code> *... * CSNAME
<code>\popmode</code> [...] * NAME
<code>\popsystemmode</code> {...} * NAME
<code>\positionoverlay</code> {...} * NAME
<code>\positionregionoverlay</code> {¹...} {²...} 1 NAME 2 NAME
<code>\postponenotes</code>
<code>\potrivestecamp</code> [...¹] [...²;...] [...³;...] 1 NAME OPT 2 inherits: \setupfieldbody
<code>\pozitie</code> [...¹;...] (...²;...) {³...} 1 inherits: \setarepozitie 2 POSITION 3 CONTENT
<code>\predefinedfont</code> [...] * FONT
<code>\predefinefont</code> [...¹] [...²] 1 NAME 2 FONT
<code>\predefinesymbol</code> [...] * NAME
<code>\prefixedpagenumber</code>
<code>\prependetoks</code> ...¹ \to ...² 1 BEFEHL 2 CSNAME

<pre> \prependgvalue {...} {...} 1 NAME 2 BEFEHL </pre>
<pre> \prependhiddenbackground {...,*,...} * NAME </pre>
<pre> \prependtocommalist {...} \^2.. 1 TEXT 2 CSNAME </pre>
<pre> \prependtoks ... \to \^2.. 1 BEFEHL 2 CSNAME </pre>
<pre> \prependtoksonce ... \to \^2.. 1 BEFEHL 2 CSNAME </pre>
<pre> \prependvalue {...} {...} 1 NAME 2 BEFEHL </pre>
<pre> \prerollblank [...,*,...] * inherits: \blanc </pre>
<pre> \prerolledpages [...,*,...] * NAME </pre>
<pre> \presetdocument [...^1.] [...,...^2...,...] 1 NAME OPT 2 inherits: \setupdocument </pre>
<pre> \presetfieldsymbols [...,*,...] * NAME </pre>
<pre> \presetLABELtext [...^1.] [...,...^2...,...] 1 SPRACHE OPT 2 KEY = VALUE instances: head label mathlabel taglabel unit operator prefix suffix btxlabel </pre>
<pre> \presetbtxlabeltext [...^1.] [...,...^2...,...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \presetheadtext [...^1.] [...,...^2...,...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \presetlabeltext [...^1.] [...,...^2...,...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \presetmathlabeltext [...^1.] [...,...^2...,...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \presetoperatortext [...^1.] [...,...^2...,...] 1 SPRACHE OPT 2 KEY = VALUE </pre>

<pre> \presetprefixtext [...] [...,...²...,...] 1 SPRACHE 2 KEY = VALUE </pre>
<pre> \presetsuffixtext [...] [...,...²...,...] 1 SPRACHE 2 KEY = VALUE </pre>
<pre> \presettaglabeltext [...] [...,...²...,...] 1 SPRACHE 2 KEY = VALUE </pre>
<pre> \presetunittext [...] [...,...²...,...] 1 SPRACHE 2 KEY = VALUE </pre>
<pre> \presetmathematics [...,*...] * NAME </pre>
<pre> \pretocommalist {¹.} \². 1 TEXT 2 CSNAME </pre>
<pre> \prettyprintbuffer {¹.} {².} 1 BUFFER 2 mp lua xml parsed-xml nested tex context niciunul NAME </pre>
<pre> \prevcounter [...] [².] 1 NAME 2 NUMMER </pre>
<pre> \prevcountervalue [[*].] * NAME </pre>
<pre> \preventmode [...,*...] * NAME </pre>
<pre> \precedentCOMANDA </pre>
<pre> \prevrealpage </pre>
<pre> \prevrealpagenumber </pre>
<pre> \prevsubcountervalue [¹.] [².] 1 NAME 2 NUMMER </pre>
<pre> \prevsubpage </pre>
<pre> \prevsubpagenumber </pre>
<pre> \prevuserpage </pre>
<pre> \prevuserpagenumber </pre>
<pre> \primasubpagina </pre>

<pre> \privatecharacter {...} * NAME </pre>
<pre> \privatecharactercode {...} * NAME </pre>
<pre> \procent </pre>
<pre> \processeazabloc [...,¹...] [...,²...] [...,³...,...] 1 NAME OPT OPT 2 NAME 3 criteriu = text ABSCHNITT </pre>
<pre> \processaction [...¹...] [...,...²=>...,...] 1 BEFEHL 2 APPLY </pre>
<pre> \processallactionsinset [...¹...] [...,...²=>...,...] 1 BEFEHL 2 APPLY </pre>
<pre> \processassignlist [...,¹...] \²... 1 TEXT 2 CSNAME </pre>
<pre> \processassignmentcommand [...,...¹=...,...] \²... 1 KEY = VALUE 2 CSNAME </pre>
<pre> \processassignmentlist [...,...¹=...,...] \²... 1 KEY = VALUE 2 CSNAME </pre>
<pre> \processbetween {...¹} \²... 1 NAME 2 CSNAME </pre>
<pre> \processbodyfontenvironmentlist \[*]... * CSNAME </pre>
<pre> \processcolorcomponents {...} * COLOR </pre>
<pre> \processcolumnset </pre>
<pre> \processcommacommand [...,¹...] \²... 1 BEFEHL 2 CSNAME </pre>
<pre> \processcommalist [...,¹...] \²... 1 BEFEHL 2 CSNAME </pre>
<pre> \processcommalistwithparameters [...,¹...] \²... 1 BEFEHL 2 CSNAME </pre>
<pre> \processcontent {...¹} \²... 1 NAME 2 CSNAME </pre>

```
\processdataset      [.1.]      [.2.]      [.3.]
1  FILE
2  NAME
3  NAME
```

```
\processfile  {...}
*  FILE
```

```
\processfilemany  {...}
*  FILE
```

```
\processfilenone    {...}
*   FILE
```

```
\processfileonce    {...}
*   FILE
```

```
\processfirstactioninset    [...]1    [...,...=>...,...]2
1  BEFEHL
2  APPLY
```

<code>\processinsertions</code>

```
\processisolatedchars  {...}  \.^2..
1  TEXT
2  CSNAME
```

```
\processisolatedwords    {...}    \.^2...
1    TEXT
2    CSNAME
```

<pre> \processlinetablebuffer [...] * BUFFER OPT </pre>

```
\processlinetablefile    {...}
*   FILE
```

\processlist	{...} ¹	{...} ²	{...} ³	\... ⁴
1	CHARACTER			
2	CHARACTER			
3	TEXT			
4	CSNAME			

<pre> \processMPbuffer [...,*...] * NAME OPT </pre>

```
\processMPfigurefile    {...}
*   FILE
```

<pre> \processmonth {\..^} {\..^} {\..^} 1 NUMBER 2 NUMBER 3 BEFEHL </pre>

<pre> \processranges [...,¹...] \..² 1 NUMBER NUMBER:NUMBER 2 CSNAME </pre>

```

1  TEXT
2  TEXT
3  CSNAME BEFEHL.

```

* BUFFER

* BUFFER

```

1  BEFEHL
2  BEFEHL
3  BEFEHL
4  BEFEHL
5  TEXT

```

* CSNAME

* NAME

* FILE

* NAME

1	NUMMER
2	BEFEHL
3	BEFEHL
4	BEFEHL

* FILE

* FILE

```

1  niciunul fixat strict halfixed quarterfixed eightsfixed NAME
2  inherits: \setupprofile
3  CONTENT

```

```

1  niciunul fixat strict halfOPTfixed quarterfixed eightsfixed NAME
2  CSNAME NUMBER

```

* NAME

* FILE

* FILE

\pseudoMixedCapped {...} * TEXT
\pseudoSmallCapped {...} * TEXT
\pseudoSmallcapped {...} * TEXT
\pseudosmallcapped {...} * TEXT
\puncte [...] * NUMMER OPT
\puncte [...,*...] * inherits: \setupperiods
\punedeadsuprafiecareia {...¹} {...²} 1 CONTENT 2 CONTENT
\punefatainfata {...¹} {...²} 1 CONTENT 2 CONTENT
\puneformula [...¹,...²] 1 + - REFERENCE OPT OPT 2 TEXT
\punelista [...¹,...²] 1 LISTE OPT 2 inherits: \seteazalista
\punelistacombinata [...¹] [...²,...²,...] 1 LISTE OPT 2 inherits: \seteazalistacombinata
\puneCOMBINEDLIST [...,*...] * inherits: \seteazalistacombinata instances: content
\punecontent [...,*...] * inherits: \seteazalistacombinata
\punenotesubsol [...,*...] * inherits: \setupnote OPT
\punenotesubsollocale [...,*...] * inherits: \setupnote OPT
\punenumarpagina
\puneregistru [...¹] [...²,...²,...] 1 NAME OPT 2 inherits: \seteazaregistru

<code>\puneREGISTER</code> [...,..[*]...,...] * inherits: \seteazaregistr^{OPT} instances: index
<code>\puneindex</code> [...,..[*]...,...] * inherits: \seteazaregistr^{OPT}
<code>\punesubformula</code> [...,..¹...] {...²} 1 + - REFERENCE OPT OPT 2 TEXT
<code>\purenumber</code> {...} * NUMMER
<code>\pusharrangedpages</code> ... <code>\poparrangedpages</code>
<code>\pushattribute</code> *... * CSNAME
<code>\pushbar</code> [...] ... <code>\popbar</code> * NAME
<code>\pushbutton</code> [...] [...] 1 NAME 2 REFERENCE
<code>\pushcatcodetable</code> ... <code>\popcatcodetable</code>
<code>\pushculoare</code> [...] ... <code>\popculoare</code> * COLOR
<code>\pushendofline</code> ... <code>\popendofline</code>
<code>\pushfundal</code> [...] ... <code>\popfundal</code> * NAME
<code>\pushglobalsetups</code> ... <code>\popglobalsetups</code>
<code>\pushindentation</code> ... <code>\popindentation</code>
<code>\pushlocalanchors</code> ... <code>\poplocalanchors</code>
<code>\pushMPdrawing</code> ... <code>\popMPdrawing</code>
<code>\pushmacro</code> *... * CSNAME
<code>\pushmathstyle</code> ... <code>\popmathstyle</code>
<code>\pushmode</code> [...] * NAME
<code>\pushoutputstream</code> [...] * NAME OPT
<code>\pushoverloadmode</code> ... <code>\popoverloadmode</code>

<code>\pushpath</code> [...] ... <code>\poppath</code> * PATH
<code>\pushpunctuation</code> ... <code>\poppunctuation</code>
<code>\pushrandomseed</code> ... <code>\poprandomseed</code>
<code>\pushreferenceprefix</code> {...} ... <code>\popreferenceprefix</code> * + - TEXT
<code>\pushsystemmode</code> {...} * NAME
<code>\putboxincache</code> {...} {...} ... 1 NAME 2 NUMMER TEXT 3 CSNAME NUMBER
<code>\putnextboxincache</code> {...} {...} \^3... {...} 1 NAME 2 NUMMER TEXT 3 CSNAME 4 CONTENT
<code>\qedhere</code> [...] * stanga dreapta înainte dupa intre
<code>\qqquad</code>
<code>\qrcode</code> [..., ...^*, ...] * text = TEXT latime = DIMENSION buffer = NAME culoare = COLOR
<code>\quad</code>
<code>\quads</code> [...] * NUMMER OPT
<code>\quarterstrut</code>
<code>\quitcommalist</code>
<code>\quitprevcommalist</code>
<code>\quittypescriptscanning</code>
<code>\ReadFile</code> {...} * FILE
<code>\raggedbottom</code>
<code>\raggedcenter</code>
<code>\raggedleft</code>

<code>\raggedright</code>
<code>\raggedslanted</code>
<code>\raggedwidecenter</code>
<code>\raisebox {¹...} \²... {³...}</code> 1 DIMENSION 2 CSNAME 3 CONTENT
<code>\randomizetext {[*]...}</code> * TEXT
<code>\randomnumber {¹...} {²...}</code> 1 NUMMER 2 NUMMER
<code>\rawcounter [¹...] [²...]</code> 1 NAME 2 NUMMER OPT
<code>\rawcountervalue [[*]...]</code> * NAME
<code>\rawdate [...,[*]...]</code> * inherits: \datacurenta
<code>\rawdoifelseinset {¹...} {...,²...} {³...} {⁴...}</code> 1 TEXT 2 TEXT 3 TRUE 4 FALSE
<code>\rawdoifinset {¹...} {...,²...} {³...}</code> 1 TEXT 2 TEXT 3 TRUE
<code>\rawdoifinsetelse {¹...} {...,²...} {³...} {⁴...}</code> 1 TEXT 2 TEXT 3 TRUE 4 FALSE
<code>\rawgetparameters [¹...] [...,²...=...]</code> 1 TEXT 2 KEY = VALUE
<code>\rawMPdata</code>
<code>\rawmathematics {[*]...}</code> * CONTENT
<code>\rawparagraphshape {[*]...}</code> * NAME
<code>\rawprocessaction [¹...] [...,²...=>...]</code> 1 BEFEHL 2 APPLY

<code>\rawprocesscommand</code> [... ¹ ,...] \ ² ... 1 BEFEHL 2 CSNAME
<code>\rawprocessmalist</code> [... ¹ ,...] \ ² ... 1 BEFEHL 2 CSNAME
<code>\rawstructurelistuservariable</code> {...} * KEY
<code>\rawsubcountervalue</code> [... ¹] [... ²] 1 NAME 2 NUMMER
<code>\rbox</code> ... ¹ {...} ² 1 TEXT OPT 2 CONTENT
<code>\readfile</code> {... ¹ } {... ² } {... ³ } 1 FILE 2 TRUE 3 FALSE
<code>\readfixfile</code> {... ¹ } {... ² } {... ³ } {... ⁴ } 1 PATH 2 FILE 3 TRUE 4 FALSE
<code>\readjobfile</code> {... ¹ } {... ² } {... ³ } 1 FILE 2 TRUE 3 FALSE
<code>\readlocfile</code> {... ¹ } {... ² } {... ³ } 1 FILE 2 TRUE 3 FALSE
<code>\readsetfile</code> {... ¹ } {... ² } {... ³ } {... ⁴ } 1 PATH 2 FILE 3 TRUE 4 FALSE
<code>\readsysfile</code> {... ¹ } {... ² } {... ³ } 1 FILE 2 TRUE 3 FALSE
<code>\readtexfile</code> {... ¹ } {... ² } {... ³ } 1 FILE 2 TRUE 3 FALSE
<code>\realpagenumber</code>
<code>\realSmallCapped</code> {...} * TEXT
<code>\realSmallcapped</code> {...} * TEXT

\realsmallcapped {...} * TEXT
\recursedepth
\recurselevel
\recursestring
\redoconvertfont
\ref [. ¹ .] [. ² .] 1 implicit text titlu numar pagina realpage 2 REFERENCE
\referencecolumnnumber
\REFERENCEFORMAT {... ¹ } {... ² } [... ³ .] 1 TEXT OPT OPT 2 TEXT 3 REFERENCE
\referencepagedetail
\referencepagestate
\referenceprefix
\referencerealpage
\referencesymbol
\referencewildcard
\referinta [... ¹ ,...] {... ² .} 1 REFERENCE 2 TEXT
\referintapagina [...*,...] * REFERENCE
\referintatext [... ¹ ,...] {... ² .} 1 REFERENCE 2 TEXT
\referring (... ¹ ,...) (... ² ,...) [... ³ .] 1 POSITION 2 POSITION 3 REFERENCE
\reflexie {...} * CONTENT
\registerattachment [... ¹ .] [... ² ...,...] 1 NAME 2 inherits: \setupattachment

<code>\registerboxanchor</code>
<code>\registerctxluafile {¹...} {²...}</code> 1 FILE 2 NUMMER
<code>\registerexternalfigure [¹...] [²...] [...,³...,...]</code> 1 FILE 2 NAME 3 inherits: \setupexternalfigure
<code>\registerfallbackfont [¹...] [...,²...,...]</code> 1 serif sans mono 2 FONT
<code>\registerfiguremask [¹...] {²...}</code> 1 NAME 2 CONTENT
<code>\registerfigurerange [¹...] {²...}</code> 1 NAME 2 CONTENT
<code>\registerfontclass {[*]...}</code> * NAME
<code>\registerhyphenationexception [¹...] [²...]</code> 1 SPRACHE 2 TEXT
<code>\registerhyphenationpattern [¹...] [²...]</code> 1 SPRACHE 2 TEXT
<code>\registermathfunction [[*]...]</code> * NAME
<code>\registermathsymbol [¹...] [²...] [³...] [⁴...]</code> 1 NAME 2 SPRACHE 3 NAME 4 TEXT
<code>\registermenubuttons [¹...] [²...]</code> 1 NAME 2 TEXT
<code>\registeroverloads [[*]...]</code> * NAME
<code>\registerparwrapper {¹...} {²...} {³...}</code> 1 NAME 2 CONTENT 3 CONTENT
<code>\registerparwrapperreverse {¹...} {²...} {³...}</code> 1 NAME 2 CONTENT 3 CONTENT

<pre> \registerpattern [...¹] [...,...²...,...] {...³} 1 NAME OPT OPT 2 nume = NAME latime = auto DIMENSION inaltime = auto DIMENSION hoffset = auto -auto DIMENSION voffset = auto -auto DIMENSION 3 CONTENT </pre>
<pre> \registersort [...¹] [...²] 1 SINGULAR 2 NAME </pre>
<pre> \registersortpage [...¹] [...²] 1 SINGULAR 2 NAME </pre>
<pre> \registersynonym [...¹] [...²] 1 SINGULAR 2 NAME </pre>
<pre> \registertopcontent [...¹] \...² {...³} 1 NUMMER 2 CSNAME 3 CONTENT </pre>
<pre> \registerunit [...¹] [...,...²...,...] 1 prefix unitate operator suffix simbol packaged 2 KEY = VALUE </pre>
<pre> \registerunitshortcut [...¹] [...,...²...,...] 1 prefix unitate operator suffix^{OPT}simbol packaged 2 KEY = VALUE </pre>
<pre> \REGISTER [...¹] {...+...²+...} 1 TEXT PROCESSOR^{OPT}->TEXT 2 INDEX instances: index </pre>
<pre> \index [...¹] {...+...²+...} 1 TEXT PROCESSOR^{OPT}->TEXT 2 INDEX </pre>
<pre> \REGISTER [...¹] {...²} {...+...³+...} 1 TEXT PROCESSOR^{OPT}->TEXT 2 TEXT 3 INDEX instances: index </pre>
<pre> \index [...¹] {...²} {...+...³+...} 1 TEXT PROCESSOR^{OPT}->TEXT 2 TEXT 3 INDEX </pre>
<pre> \regular </pre>
<pre> \relatemarking [...¹] [...²] 1 BESCHRIFTUNG 2 BESCHRIFTUNG </pre>

\relateparameterhandlers { ¹ ...} { ² ...} { ³ ...} { ⁴ ...} 1 NAME 2 NAME 3 NAME 4 NAME
\relateparameterhandlersbyns \ ¹ ... { ² ...} \ ³ ... { ⁴ ...} 1 CSNAME 2 NAME 3 CSNAME 4 NAME
\relaxvalueifundefined { [*] ...} * NAME
\remainingcharacters
\remarca (..., ¹ ...) (..., ² ...) [..., ³ ... ^{OPT} ...] { ⁴ ...} 1 POSITION 2 POSITION 3 inherits: \seteazainconjurat 4 TEXT
\removebottomthings
\removedepth
\removefromcommalist { ¹ ...} \ ² ... 1 TEXT 2 CSNAME
\removelastskip
\removelastspace
\removemarkedcontent [[*] ...] * NAME
\removemissingcharacters
\removepunctuation
\removesubstring ¹ ... \from ² ... \to \ ³ ... 1 TEXT 2 TEXT 3 CSNAME
\removetoks ¹ ... \from \ ² ... 1 BEFEHL 2 CSNAME
\removeunwantedspaces
\reorderfloats [..., [*] ...] * NAME
\repeathead [[*] ...] * ABSCHNITT

<pre>\replacefeature [...] * NAME</pre>
<pre>\replacefeature {...} * NAME</pre>
<pre>\replaceincommalist \¹... {²...} 1 CSNAME 2 NUMMER</pre>
<pre>\replacemissingcharacters</pre>
<pre>\replaceword [¹...] [²...] [³...] 1 NAME OPT 2 TEXT 3 TEXT</pre>
<pre>\rescan {...} * CONTENT</pre>
<pre>\rescanwithsetup {¹...} {²...} 1 NAME 2 CONTENT</pre>
<pre>\reservecolumnset</pre>
<pre>\resetalignmentcharacter</pre>
<pre>\resetallattributes</pre>
<pre>\resetalternate</pre>
<pre>\resetandaddfeature [...] * NAME</pre>
<pre>\resetandaddfeature {...} * NAME</pre>
<pre>\resetbar</pre>
<pre>\resetboxesincache {...} * NAME</pre>
<pre>\resetbreakpoints</pre>
<pre>\resetbuffer [...] * BUFFER</pre>
<pre>\resetcharacteralign</pre>
<pre>\resetcharacterkerning</pre>
<pre>\resetcharacterspacing</pre>
<pre>\resetcharacterstripping</pre>

<code>\resetcollector</code> [...] * NAME
<code>\resetCOMANDAp parameter</code> {...} * KEY
<code>\resetcomparingtext</code>
<code>\resetcounter</code> [...] 1 NAME 2 NUMBER
<code>\resetctxscanner</code> *.. * CSNAME
<code>\resetdigitsmanipulation</code>
<code>\resetdirection</code>
<code>\resetdummyparameter</code> {...} *.. 1 KEY 2 CSNAME
<code>\reseteazamarcaje</code> [...] * BESCHRIFTUNG
<code>\resetexpansion</code>
<code>\resetextrafontkerns</code>
<code>\resetfeature</code>
<code>\resetflag</code> {...} * NAME
<code>\resetfontcolorscheme</code>
<code>\resetfontfallback</code> [...] 1 NAME 2 FONT
<code>\resetfontsolution</code>
<code>\resethyphenationfeatures</code>
<code>\resetinjector</code> [...] * NAME
<code>\resetinteractionmenu</code> [...] * NAME
<code>\resetitaliccorrection</code>
<code>\resetlayer</code> [...] * NAME

\resetsetups [...] * NAME
\resetshownsynonyms [...] * SINGULAR
\resetsubpagenumber
\resetsymbolset
\resetsynchronizemarking [...] * BESCHRIFTUNG
\resetsynonyms [...] * SINGULAR
\resetsynonymsprogress [...] * SINGULAR
\resetsystemmode {...} * NAME
\resettimer
\resettokenlist [...] * NAME
\resettrackers
\resettransliteration
\resettrialtypesetting
\resetusedsortings [...] * SINGULAR
\resetusedsynonyms [...] * SINGULAR
\resetuserpagenumber
\resetvalue {...} * NAME
\resetvisualizers
\reshapebox {...} * BEFEHL
\resolvedglyphdirect {...} {...} 1 FONT 2 e:NAME x:NUMMER d:NUMMER s:NUMMER i:NUMMER n:NAME c:NAME u:NAME a:NAME
\resolvedglyphstyled {...} {...} 1 FONT 2 e:NAME x:NUMMER d:NUMMER s:NUMMER i:NUMMER n:NAME c:NAME u:NAME a:NAME

<pre> \restartcounter [...] [...] [...] 1 NAME 2 NUMMER 3 NUMMER </pre>
<pre> \restorebox {...} {...} 1 NAME 2 NAME </pre>
<pre> \restorecatcodes </pre>
<pre> \restorecounter [...] * NAME </pre>
<pre> \restorecurrentattributes {...} * NAME </pre>
<pre> \restoreendofline </pre>
<pre> \restoreglobalbodyfont </pre>
<pre> \retestfeature </pre>
<pre> \reusableMPgraphic {...} {...,...²...,...} 1 NAME 2 KEY = VALUE </pre>
<pre> \reusableMPgraphic [...,...¹...,...] {...} 1 instance = metafun^{OPT}minifun extrafun lessfun scaledfun doublefun binaryfun decimalfun positfun mprun metapost nofun scaledpost doublepost binarypost decimalpost simplefun descriptiontext = TEXT alternativetext = TEXT 2 NAME </pre>
<pre> \reuseMPgraphic {...} {...,...²...,...} 1 NAME 2 KEY = VALUE </pre>
<pre> \reuseMPgraphic [...,...¹...,...] {...} 1 instance = metafun^{OPT}minifun extrafun lessfun scaledfun doublefun binaryfun decimalfun positfun mprun metapost nofun scaledpost doublepost binarypost decimalpost simplefun descriptiontext = TEXT alternativetext = TEXT 2 NAME </pre>
<pre> \reuserandomseed </pre>
<pre> \reversehbox .¹... {...} 1 TEXT 2 CONTENT </pre>
<pre> \reversehpack .¹... {...} 1 TEXT 2 CONTENT </pre>
<pre> \reversetpack .¹... {...} 1 TEXT 2 CONTENT </pre>

$\backslash$ reversevbox $\dots$ ¹ $\{...\}$ ² 1 TEXT OPT 2 CONTENT
$\backslash$ reversevboxcontent $\dots$ * CSNAME NUMBER
$\backslash$ reversevpack $\dots$ ¹ $\{...\}$ ² 1 TEXT OPT 2 CONTENT
$\backslash$ reversevtop $\dots$ ¹ $\{...\}$ ² 1 TEXT OPT 2 CONTENT
$\backslash$ revivefeature
$\backslash$ rfence $\dots$ * $\backslash$ } $\backslash$] $\backslash$) $\backslash$ $\backslash$ egroup $\backslash$ rparent $\backslash$ rparenthesis " $\backslash$ rparen " $\backslash$ rbracket $\backslash$ rbrack " $\backslash$ rbrace $\backslash$ rceil $\backslash$ rceiling $\backslash$ rfloor $\backslash$ urcorner $\backslash$ lrcorner $\backslash$ rmoustache $\backslash$ rrbracket $\backslash$ rangle $\backslash$ rrangle $\backslash$ rgroup $\backslash$ vert $\backslash$ singleverticalbar $\backslash$ doubleverticalbar $\backslash$ tripleverticalbar $\backslash$ rvert $\backslash$ rVert $\backslash$ rointerval $\backslash$ rlinterval CHARACTER
$\backslash$ rhbox $\{...\}$ * CONTENT
$\backslash$ riggedcenter
$\backslash$ riggedleft
$\backslash$ riggedright
$\backslash$ rightbottombox $\{...\}$ * CONTENT
$\backslash$ rightbox $\{...\}$ * CONTENT
$\backslash$ righthbox $\{...\}$ * CONTENT
$\backslash$ rightLABELtext $\{...\}$ * KEY instances: head label mathlabel
$\backslash$ rightheadtext $\{...\}$ * KEY
$\backslash$ rightlabeltext $\{...\}$ * KEY
$\backslash$ rightmathlabeltext $\{...\}$ * KEY
$\backslash$ rightline $\{...\}$ * CONTENT

$\backslash\mathrm{rightorleftpageaction}$ $\{.^1.\}$ $\{.^2.\}$ 1 BEFEHL 2 BEFEHL
$\backslash\mathrm{rightpageorder}$
$\backslash\mathrm{rightparbox}$ $[.^1.]$ $\{.^2.\}$ 1 global OPT 2 CONTENT
$\backslash\mathrm{rightskipadaption}$
$\backslash\mathrm{rightsubguillemot}$
$\backslash\mathrm{righttopleft}$
$\backslash\mathrm{righttopleftthbox}$ $.^1$ $\{.^2.\}$ 1 TEXT OPT 2 CONTENT
$\backslash\mathrm{righttopleftvbox}$ $.^1$ $\{.^2.\}$ 1 TEXT OPT 2 CONTENT
$\backslash\mathrm{righttopleftvtop}$ $.^1$ $\{.^2.\}$ 1 TEXT OPT 2 CONTENT
$\backslash\mathrm{righttopbox}$ $\{.^*.\}$ * CONTENT
$\backslash\mathrm{riglatext}$ $[.^1.]$ $\{.^2.\}$ 1 sus centru subs ^{OPT} OPT 2 TEXT
$\backslash\mathrm{rigleumplere}$ $[...^1=...]$ $\{.^2.\}$ $\{.^3.\}$ 1 inherits: \seteazarigleumplere ^{OPT} OPT OPT 2 TEXT 3 TEXT
$\backslash\mathrm{rlap}$ $\{.^*.\}$ * CONTENT
$\backslash\mathrm{robustaddtocommalist}$ $\{.^1.\}$ $\backslash.^2.$ 1 TEXT 2 CSNAME
$\backslash\mathrm{robustdoifelseinset}$ $\{.^1.\}$ $\{...^2,...\}$ $\{.^3.\}$ $\{.^4.\}$ 1 TEXT 2 TEXT 3 TRUE 4 FALSE
$\backslash\mathrm{robustdoifinsetelse}$ $\{.^1.\}$ $\{...^2,...\}$ $\{.^3.\}$ $\{.^4.\}$ 1 TEXT 2 TEXT 3 TRUE 4 FALSE

<code>\robustpretocommalist</code> $\{...\}$ $\backslash^2...$ 1 TEXT 2 CSNAME
<code>\rollbutton</code> $[...,\overset{1}{=},...]$ $...^2$ $[...^3]$ 1 inherits: \setupbutton 2 TEXT 3 REFERENCE
<code>\rollbutton</code> $[...^1]$ $[...,\overset{2}{=},...]$ $...^3$ $[...^4]$ 1 NAME OPT OPT 2 inherits: \setezameniuinteractiune 3 TEXT 4 REFERENCE
<code>\roman</code>
<code>\rootCOMANDApameter</code> $\{...\}$ * KEY
<code>\roteste</code> $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: \setezazafotare 2 CONTENT
<code>\rtlhbox</code> $...^1$ $\{...\}^2$ 1 TEXT OPT 2 CONTENT
<code>\rtltext</code> $\{...\}^*$ * CONTENT
<code>\rtlvbox</code> $...^1$ $\{...\}^2$ 1 TEXT OPT 2 CONTENT
<code>\rtlvtop</code> $...^1$ $\{...\}^2$ 1 TEXT OPT 2 CONTENT
<code>\rtop</code> $...^1$ $\{...\}^2$ 1 TEXT OPT 2 CONTENT
<code>\ruby</code> $[...^1]$ $\{...\}^2$ $\{...\}^3$ 1 NAME OPT 2 TEXT 3 TEXT
<code>\ruledddbox</code> $...^1$ $\{...\}^2$ 1 TEXT OPT 2 CONTENT
<code>\ruledddpack</code> $...^1$ $\{...\}^2$ 1 TEXT OPT 2 CONTENT
<code>\ruledhbox</code> $...^1$ $\{...\}^2$ 1 TEXT OPT 2 CONTENT

\ruledhpack ¹ ... { ² ...} 1 TEXT OPT 2 CONTENT
\ruledmbox {...} * CONTENT
\ruledtpack ¹ ... { ² ...} 1 TEXT OPT 2 CONTENT
\ruledvbox ¹ ... { ² ...} 1 TEXT OPT 2 CONTENT
\ruledvpack ¹ ... { ² ...} 1 TEXT OPT 2 CONTENT
\ruledvtop ¹ ... { ² ...} 1 TEXT OPT 2 CONTENT
\runbuffer [¹ ...] [² ...] 1 BUFFER OPT 2 NAME
\runMPbuffer [...*...] OPT * NAME
\runninghbox {...} * CONTENT
\russianNumerals {...} * NUMMER
\russiannumerals {...} * NUMMER
\ScaledPointsToBigPoints { ¹ ...} \ ² ... 1 DIMENSION 2 CSNAME
\ScaledPointsToWholeBigPoints { ¹ ...} \ ² ... 1 DIMENSION 2 CSNAME
\Smallcapped {...} * TEXT
\safechar {...} * NUMMER
\samplefile {...} * FILE
\sans
\sansaldin

<code>\sansnormal</code>
<code>\sansserif</code>
<code>\savebox {¹...} {²...} {³...}</code> 1 NAME 2 NAME 3 CONTENT
<code>\savebtxdataset [¹...] [²...] [³...³...]</code> 1 NAME OPT OPT OPT 2 FILE 3 dataset = NAME type = bib lua xml fisier = FILE criteriu = tot text intro referinta curent aici precedent local componenta SECTIONBLOCK:tot SECTIONBLOCK:referinta SECTIONBLOCK:curent SECTIONBLOCK:precedent optiune = TEXT
<code>\savebuffer [...¹,...] [...²...]</code> 1 BUFFER OPT 2 inherits: \setupsavebuffer
<code>\savebuffer [...¹,...] [²...]</code> 1 BUFFER 2 FILE
<code>\savecounter [...]</code> * NAME
<code>\saveculoare ... \restoreculoare</code>
<code>\savecurrentattributes {...}</code> * NAME
<code>\savemathexport [...[*]...]</code> * inherits: \setupmathexport OPT
<code>\savenormalmeaning \...</code> * CSNAME
<code>\sbox {...}</code> * CONTENT
<code>\scala [¹...] [...²...]</code> {³...} 1 NAME OPT OPT 2 inherits: \setupscale 3 CONTENT
<code>\scaps {...}</code> * TEXT
<code>\scriebuffer [...¹,...] [...²...]</code> 1 BUFFER OPT OPT 2 inherits: \seteazatyping
<code>\typeBUFFER [...[*]...]</code> * inherits: \seteazatyping OPT

<pre> \sctieinlista [...]¹ [...,...²...,...]_{OPT} {...}³ {...}⁴ 1 LISTE 2 inherits: \seteazalista 3 NUMMER 4 TEXT </pre>
<pre> \sctieintreliste [...]¹ [...,...²...,...]_{OPT} {...}³ 1 LISTE 2 inherits: \seteazalista 3 BEFEHL </pre>
<pre> \SCRIPT instances: hangul hanzi nihongo ethiopic thai latin test </pre>
<pre> \ethiopic </pre>
<pre> \hangul </pre>
<pre> \hanzi </pre>
<pre> \latin </pre>
<pre> \nihongo </pre>
<pre> \test </pre>
<pre> \thai </pre>
<pre> \scrismanual </pre>
<pre> \secondoffivearguments {...}¹ {...}² {...}³ {...}⁴ {...}⁵ 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT </pre>
<pre> \secondoffourarguments {...}¹ {...}² {...}³ {...}⁴ 1 TEXT 2 TEXT 3 TEXT 4 TEXT </pre>
<pre> \secondofsixarguments {...}¹ {...}² {...}³ {...}⁴ {...}⁵ {...}⁶ 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT </pre>
<pre> \secondofthreearguments {...}¹ {...}² {...}³ 1 TEXT 2 TEXT 3 TEXT </pre>
<pre> \secondofthreeunexpanded {...}¹ {...}² {...}³ 1 TEXT 2 TEXT 3 TEXT </pre>

`\secondoftwoarguments    {...}    {...}`

1 TEXT
2 TEXT

`\secondoftwounexpanded    {...}    {...}`

1 TEXT
2 TEXT

`\SECTION    [...,1...]    {...}`

1 REFERENCE OPT
2 TEXT

instances: part chapter section subsection subsubsection subsubsubsection
subsubsubsubsection title subject subsubject subsubsubject subsubsubsubject
subsubsubsubsubject

`\SECTION    [...,..*...,..]`

* titlu = TEXT
 semncarte = TEXT
 marcaje = TEXT
 lista = TEXT
 referinta = REFERENCE
 referencetext = TEXT
 numarpropriu = TEXT
 placeholder = TEXT

instances: part chapter section subsection subsubsection subsubsubsection
subsubsubsubsection title subject subsubject subsubsubject subsubsubsubject
subsubsubsubsubject

`\chapter    [...,..*...,..]`

* titlu = TEXT
 semncarte = TEXT
 marcaje = TEXT
 lista = TEXT
 referinta = REFERENCE
 referencetext = TEXT
 numarpropriu = TEXT
 placeholder = TEXT

`\part       [...,..*...,..]`

* titlu = TEXT
 semncarte = TEXT
 marcaje = TEXT
 lista = TEXT
 referinta = REFERENCE
 referencetext = TEXT
 numarpropriu = TEXT
 placeholder = TEXT

`\section    [...,..*...,..]`

* titlu = TEXT
 semncarte = TEXT
 marcaje = TEXT
 lista = TEXT
 referinta = REFERENCE
 referencetext = TEXT
 numarpropriu = TEXT
 placeholder = TEXT

`\subject    [...,..*...,..]`

* titlu = TEXT
 semncarte = TEXT
 marcaje = TEXT
 lista = TEXT
 referinta = REFERENCE
 referencetext = TEXT
 numarpropriu = TEXT
 placeholder = TEXT

`\subsection` [`..,..*``..,..`]

* `titlu` = TEXT
`semncarte` = TEXT
`marcaje` = TEXT
`lista` = TEXT
`referinta` = REFERENCE
`referencetext` = TEXT
`numarpropriu` = TEXT
`placeholder` = TEXT

`\subsubject` [`..,..*``..,..`]

* `titlu` = TEXT
`semncarte` = TEXT
`marcaje` = TEXT
`lista` = TEXT
`referinta` = REFERENCE
`referencetext` = TEXT
`numarpropriu` = TEXT
`placeholder` = TEXT

`\subsubsection` [`..,..*``..,..`]

* `titlu` = TEXT
`semncarte` = TEXT
`marcaje` = TEXT
`lista` = TEXT
`referinta` = REFERENCE
`referencetext` = TEXT
`numarpropriu` = TEXT
`placeholder` = TEXT

`\subsubsubject` [`..,..*``..,..`]

* `titlu` = TEXT
`semncarte` = TEXT
`marcaje` = TEXT
`lista` = TEXT
`referinta` = REFERENCE
`referencetext` = TEXT
`numarpropriu` = TEXT
`placeholder` = TEXT

`\subsubsubsection` [`..,..*``..,..`]

* `titlu` = TEXT
`semncarte` = TEXT
`marcaje` = TEXT
`lista` = TEXT
`referinta` = REFERENCE
`referencetext` = TEXT
`numarpropriu` = TEXT
`placeholder` = TEXT

`\subsubsubsubject` [`..,..*``..,..`]

* `titlu` = TEXT
`semncarte` = TEXT
`marcaje` = TEXT
`lista` = TEXT
`referinta` = REFERENCE
`referencetext` = TEXT
`numarpropriu` = TEXT
`placeholder` = TEXT

`\subsubsubsubsection` [`..,..*``..,..`]

* `titlu` = TEXT
`semncarte` = TEXT
`marcaje` = TEXT
`lista` = TEXT
`referinta` = REFERENCE
`referencetext` = TEXT
`numarpropriu` = TEXT
`placeholder` = TEXT

`\subsubsubsubsubject` [...,..¹...,...]

* titlu = TEXT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
referencetext = TEXT
numarpropriu = TEXT
placeholder = TEXT

`\title` [...,..¹...,...]

* titlu = TEXT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
referencetext = TEXT
numarpropriu = TEXT
placeholder = TEXT

`\chapter` [...,..¹...] {...².}

1 REFERENCE OPT
2 TEXT

`\SECTION` [...,..¹...] {...².} {...³.}

1 REFERENCE OPT
2 NUMMER
3 TEXT

instances: part chapter section subsection subsubsection subsubsubsection
subsubsubsubsection title subject subsubject subsubsubject subsubsubsubject
subsubsubsubsubject

`\chapter` [...,..¹...] {...².} {...³.}

1 REFERENCE OPT
2 NUMMER
3 TEXT

`\part` [...,..¹...] {...².} {...³.}

1 REFERENCE OPT
2 NUMMER
3 TEXT

`\section` [...,..¹...] {...².} {...³.}

1 REFERENCE OPT
2 NUMMER
3 TEXT

`\subject` [...,..¹...] {...².} {...³.}

1 REFERENCE OPT
2 NUMMER
3 TEXT

`\subsection` [...,..¹...] {...².} {...³.}

1 REFERENCE OPT
2 NUMMER
3 TEXT

`\subsubject` [...,..¹...] {...².} {...³.}

1 REFERENCE OPT
2 NUMMER
3 TEXT

`\subsubsection` [...,..¹...] {...².} {...³.}

1 REFERENCE OPT
2 NUMMER
3 TEXT

<pre> \subsubsubject [...]{}{} 1 REFERENCE 2 NUMMER 3 TEXT </pre>
<pre> \subsubsubsection [...]{}{} 1 REFERENCE 2 NUMMER 3 TEXT </pre>
<pre> \subsubsubsubject [...]{}{} 1 REFERENCE 2 NUMMER 3 TEXT </pre>
<pre> \subsubsubsubsection [...]{}{} 1 REFERENCE 2 NUMMER 3 TEXT </pre>
<pre> \subsubsubsubsubject [...]{}{} 1 REFERENCE 2 NUMMER 3 TEXT </pre>
<pre> \title [...]{}{} 1 REFERENCE 2 NUMMER 3 TEXT </pre>
<pre> \part [...]{} 1 REFERENCE 2 TEXT </pre>
<pre> \section [...]{} 1 REFERENCE 2 TEXT </pre>
<pre> \subject [...]{} 1 REFERENCE 2 TEXT </pre>
<pre> \subsection [...]{} 1 REFERENCE 2 TEXT </pre>
<pre> \subsubject [...]{} 1 REFERENCE 2 TEXT </pre>
<pre> \subsubsection [...]{} 1 REFERENCE 2 TEXT </pre>
<pre> \subsubsubject [...]{} 1 REFERENCE 2 TEXT </pre>
<pre> \subsubsubsection [...]{} 1 REFERENCE 2 TEXT </pre>

\subsubsubsubject [..., ¹ ...] {...} 1 REFERENCE OPT 2 TEXT
\subsubsubsubsection [..., ¹ ...] {...} 1 REFERENCE OPT 2 TEXT
\subsubsubsubsubject [..., ¹ ...] {...} 1 REFERENCE OPT 2 TEXT
\title [..., ¹ ...] {...} 1 REFERENCE OPT 2 TEXT
\veziREGISTER [... ¹] {...+... ² +...} {... ³ } 1 TEXT PROCESSOR->TEXT ^{OPT} 2 INDEX 3 TEXT PROCESSOR->TEXT instances: index
\veziindex [... ¹] {...+... ² +...} {... ³ } 1 TEXT PROCESSOR->TEXT ^{OPT} 2 INDEX 3 TEXT PROCESSOR->TEXT
\select {... ¹ } {... ² } {... ³ } {... ⁴ } {... ⁵ } {... ⁶ } 1 NAME OPT OPT OPT OPT OPT 2 CONTENT 3 CONTENT 4 CONTENT 5 CONTENT 6 CONTENT
\selecteazablocuri [..., ¹ ...] [..., ² ...] [..., ³ ...,...] 1 NAME OPT OPT 2 NAME 3 criteriu = text ABSCHNITT
\semncarte [... ¹] {... ² } 1 ABSCHNITT LISTE ^{OPT} 2 TEXT
\serializecommalist [...,*...] * BEFEHL
\serializedcommalist
\serif
\serifbold
\serifnormal
\setalignmentcharacter
\setalignmentswitch {...*} * stanga centru dreapta

\setalternate {...}

* TEXT

\setanchorbox [...]¹ [...,...²...]² \...³ {...}⁴

1 NAME

2 inherits: \setupboxanchor

3 CSNAME

4 CONTENT

\setare [...]

* NAME

\setareitemization [...]¹ [...,...²...]²

1 NAME NAME:NUMBER

2 inainte = BEFEHL

dupa = BEFEHL

intre = BEFEHL

inaintetitlu = BEFEHL

dupatitlu = BEFEHL

textstanga = BEFEHL

textdreapta = BEFEHL

stanga = BEFEHL

dreapta = BEFEHL

factor = NUMBER

pas = DIMENSION

latime = DIMENSION

distanta = DIMENSION

optiune = intro aleator continuu impachetat autointro broad text inainte dupa faraalb margine
inmargine lamargine intext headintext larg ajustat nofit paragraf unit notjoinedup
serried stopper despachetat repetat norepeat reverse coloane overlay unu doi trei patru
cinci six seven eight nine standard NUMBER*broad NUMBER*serried orizontal NAME

margine = da nu standard DIMENSION

marginestanga = da nu standard DIMENSION

marginedreapta = da nu standard DIMENSION

distantamarginestanga = da nu standard DIMENSION

distantamarginedreapta = da nu standard DIMENSION

aliniere = inherits: \seteazaaliniere

aliniat = inherits: \seteazaaliniat

start = NUMBER

symaliniere = stanga centru dreapta flushleft center flushright

simbol = NAME

n = NUMBER

aliniaturmator = da nu auto

intern = BEFEHL

comanda = CSNAME

elemente = NUMBER

latimemaxima = DIMENSION

itemalign = stanga dreapta centru flushleft flushright intern extern

alignsymbol = da nu

textdistance = mic mediu mare niciunul spatiu DIMENSION

separatortext = BEFEHL

lasttextseparator = BEFEHL

punestopper = da nu display inline

stil = STYLE BEFEHL

culoare = COLOR

stiltitlu = STYLE BEFEHL

culoaretitlu = COLOR

stilmarcaj = STYLE BEFEHL

culoaremarcaj = COLOR

stilsimbol = STYLE BEFEHL

culoaresimbol = COLOR

grid = inherits: \definegridsnapping

packcriterium = NUMBER

distantacoloane = DIMENSION

inherits: \setupcounter

```

\setarelimba [...] [...]
1 SPRACHE implicit 1 OPT
2 implicit = SPRACHE
  stare = start stop
  data = inherits: \datacurenta
  time = inherits: \currenttime
  patterns = FILE
  lefthyphenmin = NUMBER
  righthyphenmin = NUMBER
  lefthyphenchar = NUMBER
  righthyphenchar = NUMBER
  explicitlefthyphenchar = NUMBER
  explicitrighthyphenchar = NUMBER
  setups = NAME
  spatiere = broad impachetat
  font = auto NAME
  bidi = stanga dreapta l2r r2l
  text = TEXT
  limittext = TEXT
  hyphen = TEXT
  compoundhyphen = TEXT
  leftcompoundhyphen = TEXT
  rightcompoundhyphen = TEXT
  minicitatstanga = BEFEHL
  minicitatdreapta = BEFEHL
  citatstanga = BEFEHL
  citatdreapta = BEFEHL
  leftspeech = BEFEHL
  rightspeech = BEFEHL
  propozitiestanga = BEFEHL
  middlespeech = BEFEHL
  propozitiedreapta = BEFEHL
  midsentence = BEFEHL
  subpropozitiestanga = BEFEHL
  subpropozitiedreapta = BEFEHL
  factor = da nu
  goodies = FILE

```

```

\setareoutput [...]
* implicit pdf lua json js mps niciunul gol

```

```

\setarepozitie [...] 1 [...] OPT [...] 2 [...]
1 NAME
2 offset = da nu
  unitate = ex em pt in cm mm sp bp pc dd cc nc
  stare = start overlay
  xoffset = DIMENSION
  yoffset = DIMENSION
  xstep = absolut relativ
  ystep = absolut relativ
  xscala = NUMBER
  yscala = NUMBER
  xfactor = NUMBER
  yfactor = NUMBER
  factor = NUMBER
  scala = NUMBER

```

```

\setare {...}
* NAME

```

```

\setautopagestaterealpageno {...}
* NAME

```

```

\setbar [...]
* NAME

```

```

\setbigbodyfont

```

<pre> \setboxanchor [...]¹ [...]² [...,...³...,...]³ {...}⁴ 1 NAME 2 NAME 3 inherits: \setupboxanchorcontent 4 CONTENT </pre>
<pre> \setboxllx ...¹ {...}² 1 CSNAME NUMBER 2 DIMENSION </pre>
<pre> \setboxlly ...¹ {...}² 1 CSNAME NUMBER 2 DIMENSION </pre>
<pre> \setbreakpoints [...][*] * reset NAME </pre>
<pre> \setbuffer [...][*] ... \endbuffer * NAME </pre>
<pre> \setcapstrut </pre>
<pre> \setcatcodetable \...[*] * CSNAME </pre>
<pre> \setcharacteralign {...}¹ {...}² 1 NUMBER 2 TEXT number->TEXT text->TEXT </pre>
<pre> \setcharacteraligndetail {...}¹ {...}² {...}³ {...}⁴ 1 NUMBER 2 TEXT number->TEXT text->TEXT 3 DIMENSION 4 DIMENSION </pre>
<pre> \setcharactercasing [...][*] * reset CUVANT cuvant Cuvant Cuvinte majuscula Majuscula aleator mixed camel Camel cap Cap </pre>
<pre> \setcharactercleaning [...][*] * reset 1 </pre>
<pre> \setcharacterkerning [...][*] * reset NAME </pre>
<pre> \setcharacterspacing [...][*] * reset NAME </pre>
<pre> \setcharacterstripping [...][*] * reset 1 </pre>
<pre> \setcharstrut {...}[*] * TEXT </pre>
<pre> \setcollector [...]¹ [...,...²...,...]² {...}³ 1 NAME 2 inherits: \setupcollector 3 CONTENT </pre>
<pre> \setcolormodel [...][*] * black bw gri rgb cmyk tot niciunul </pre>

<pre> \setcolumnset [...,..¹...,...] {...} 1 c = NUMMER r = NUMMER nc = NUMMER nr = NUMMER metoda = aici fixat sus subsol tblr lrtb tblr rltb btlr lrbt btrl rlbt fxtb fxbt optiune = pagina nsus = NUMMER njos = NUMMER 2 CONTENT </pre>
<pre> \setCOMANDApameter {...} {...} 1 KEY 2 CONTENT </pre>
<pre> \setcomparingtext [...] * reset NAME </pre>
<pre> \setcounter [...¹] [...²] [...³] 1 NAME 2 NUMMER 3 NUMMER </pre>
<pre> \setcounterown [...¹] [...²] [...³] 1 NAME 2 NUMMER 3 TEXT </pre>
<pre> \setctxluafunction {...¹} {...²} 1 NAME 2 NUMMER </pre>
<pre> \setcurrentfontclass {...} * NAME </pre>
<pre> \setcurrentinsection {...} * NAME </pre>
<pre> \setdataset [...¹] [...²] [...,..³...,...] 1 NAME 2 NAME 3 KEY = VALUE </pre>
<pre> \setdatavalue {...¹} {...²} 1 NAME 2 NUMMER </pre>
<pre> \setdate [...,..[*]...,...] * d = NUMMER m = NUMMER y = NUMMER </pre>
<pre> \setdefaultpenalties </pre>
<pre> \setdigitsmanipulation [...] * reset NUMMER </pre>
<pre> \setdirection [...] * NUMMER </pre>
<pre> \setdirectsymbolicfont {...} * FONT </pre>

\setdocumentargument { ¹ ...} { ² ...} 1 NAME 2 TEXT
\setdocumentargumentdefault { ¹ ...} { ² ...} 1 NAME 2 TEXT
\setdocumentfilename { ¹ ...} { ² ...} 1 NUMMER 2 TEXT
\setdummyparameter { ¹ ...} { ² ...} 1 KEY 2 BEFEHL
\seteazaaliniat [...,*...] * [-+]mic [-+]mediu [-+]mar ^{OPT} e niciunul nu nu primul urmatorul da totdeauna niciodata impar par normal reset toggle DIMENSION NAME
\seteazaalinierea [...,*...] * broad larg squeeze subsol inaltime adancime linie inalt jos lohi flushright flushleft centru da nu latime normal reset intern extern flushinner flushouter stanga dreapta center dezactivat ultim end paragraf lefttoright righttoleft l2r r2l tabelul lesshyphenation morehyphenation suspendat hangingboth nothanging hz fullhz nohz despsilabe nedespsilabe collapsed notcollapsed explicit tolerant foartetolerant dilatat extremestretch final 1*final 2*final 3*final 4*final more 1*more 2*more hangleft hangright flushforward flushbackward totdeauna profile ajustat noorphans keeporphans notwins keeptwins notoddlers keeptoddlers tight inclinat granular lesswidows lessclubs lessbroken lessorphans lessorphans:2 lessorphans:3 lessorphans:4 defaultwidows defaultclubs defaultbroken strictwidows strictwidows:2 strictwidows:3 strictwidows:4 strictclubs strictclubs:2 strictclubs:3 strictclubs:4 strictbroken defaultmath strictmath nonstrictmath implicit snapping nosnapping snapping:yes snapping:normal snapping:0 snapping:1 snapping:2 snapping:0:10 snapping:1:10 snapping:2:10 snapping:2:20 snapping:1:top snapping:1:bottom snapping:2:top snapping:2:bottom
\seteazaantet [¹ ...] [..., ² ...,...] 1 text margine bordur ^{EF} 2 stare = start stop gol inalt niciunul normal faramarcare NAME stil = STYLE BEFEHL culoare = COLOR strut = da nu n = NUMMER inainte = BEFEHL dupa = BEFEHL textstanga = TEXT textmijloc = TEXT textdreapta = TEXT stilstanga = STYLE BEFEHL middlestyle = STYLE BEFEHL stildreapta = STYLE BEFEHL culoarestanga = COLOR middlecolor = COLOR culoaredreapta = COLOR latime = DIMENSION latimestanga = DIMENSION middlewidth = DIMENSION margin dreapta = DIMENSION
\seteazaaranjareapag [...,*...] * dezactivat oglindit douafete negativ 90 180 270 reset fundal normal 2*16 2*8 2*4 2*2 2**2 2SIDE 2TOP 2UP 2DOWN 2*4*2 2*2*4 2TOPSIDE 2*8*Z 2*6*Z 1*8 1*4 3SIDE TRYPTICHON ZFLYER-8 ZFLYER-10 ZFLYER-12 MAPFLYER-12 DOUBLEWINDOW 1*2-Conference 1*4-Conference 2*2*2 2*2*3 XY FLASHCARD NAME

\setezaaspect ¹[...] ²[...,...,...]

1	NAME	OPT	
2	stare	=	start stop normal repetat
	margin	=	DIMENSION
	bordura	=	DIMENSION
	distantamargin	=	DIMENSION
	distantabordura	=	DIMENSION
	distantabordurastanga	=	DIMENSION
	distantacoltdreapta	=	DIMENSION
	distantamarginestanga	=	DIMENSION
	distantamarginedreapta	=	DIMENSION
	distantasus	=	DIMENSION
	distantaantet	=	DIMENSION
	distantasubsol	=	DIMENSION
	distantajos	=	DIMENSION
	preset	=	NAME
	marginestanga	=	DIMENSION
	marginedreapta	=	DIMENSION
	bordurastanga	=	DIMENSION
	borduradreapta	=	DIMENSION
	antet	=	DIMENSION
	subsol	=	DIMENSION
	sus	=	DIMENSION
	jos	=	DIMENSION
	spatiuspate	=	DIMENSION
	spatiusus	=	DIMENSION
	setups	=	NAME
	cutspace	=	DIMENSION
	latime	=	DIMENSION centru ajustat
	spatiujos	=	DIMENSION
	linii	=	NUMMER
	inaltime	=	DIMENSION centru ajustat
	offsetoriz	=	DIMENSION
	veroffset	=	DIMENSION
	coloane	=	NUMMER
	distantacoloane	=	DIMENSION
	metoda	=	implicit normal NAME
	locatie	=	stanga centru dreapta sus subsol ofata douafete
	latimetext	=	DIMENSION
	inaltimetext	=	DIMENSION
	nx	=	NUMMER
	ny	=	NUMMER
	dx	=	DIMENSION
	dy	=	DIMENSION
	scala	=	NUMMER
	sx	=	NUMMER
	sy	=	NUMMER
	marcaje	=	on dezactivat pagina gol culoare unu doi patru
	grid	=	da nu snapping dezactivat
	textdistance	=	DIMENSION
	alternativ	=	implicit normal marcaj NAME
	clipoffset	=	DIMENSION
	cropoffset	=	DIMENSION auto
	trimoffset	=	DIMENSION
	bleedoffset	=	DIMENSION
	artoffset	=	DIMENSION
	directie	=	normal reverse
	limitstretch	=	da auto DIMENSION
	vz	=	da NUMMER
	adaptive	=	DIMENSION
	rows	=	NUMMER
	rowdistance	=	DIMENSION
	snapping	=	da normal 0 1 2 0:10 1:10 2:10 2:20 1:top 1:bottom 2:top 2:bottom

\setezaaspect [...]

* reset NAME

\seteazabarainteractiune [...] ¹ [...] ² [...]

1 NAME OPT
2 alternativ = a b c d e f g
stare = start stop
comanda = CSNAME
latime = DIMENSION
inaltime = DIMENSION max broad
inaltime = DIMENSION max
distanta = DIMENSION
pas = mic mediu mare
culoarefundal = COLOR
stil = STYLE BEFEHL
culoare = COLOR
culoarecontrast = COLOR
simbol = da nu
inherits: \seteazainconjurat

\seteazablanc [...] ^{*}

* inherits: \blanc OPT

\seteazabloc [...] ¹ [...] ² [...]

1 NAME OPT
2 inainte = BEFEHL
dupa = BEFEHL
stanga = BEFEHL
dreapta = BEFEHL
alternativ = paragraf text
intern = BEFEHL
setups = NAME
alinie = inherits: \seteazaalinie
stil = STYLE BEFEHL
culoare = COLOR

\seteazablocsectiune [...] ¹ [...] ² [...]

1 NAME OPT
2 pagina = inherits: \pagina
inainte = BEFEHL
dupa = BEFEHL
numar = da nu

\seteazabuffer [...] ¹ [...] ² [...]

1 BUFFER OPT
2 define = da nu
inainte = BEFEHL
dupa = BEFEHL
strip = da nu

\seteazacamp [...] ¹ [...] ² [...] ³ [...] ⁴ [...] ⁵ [...]

1 NAME OPT
2 reset eticheta incadrat orizontal vertical
3 inherits: \setupfieldtotalframed
4 inherits: \setupfieldlabelframed
5 inherits: \setupfieldcontentframed

\seteazacampuri [...] ¹ [...] ² [...] ³ [...] ⁴ [...]

1 reset eticheta incadrat ~~or~~izional vertical OPT
2 inherits: \setupfieldtotalframed
3 inherits: \setupfieldlabelframed
4 inherits: \setupfieldcontentframed

\seteazaclipping [...,..^{*}...,...]

* stare = start stop
latime = DIMENSION
inaltime = DIMENSION
hoffset = DIMENSION
voffset = DIMENSION
x = NUMMER
y = NUMMER
nx = NUMMER
ny = NUMMER
sx = NUMMER
sy = NUMMER
offsetstanga = DIMENSION
offsetdreapta = DIMENSION
offsetsus = DIMENSION
offsetjos = DIMENSION
mp = NAME
n = NUMMER
offset = DIMENSION

\seteazacoloane [...,..^{*}...,...]

* inherits: \setupmixedcolumns

\seteazacomentariu [...,¹...] [...,²...,...]

1 NAME OPT
2 stare = start stop niciunul
metoda = normal ascuns
simbol = Comment Ajutor Insert Cheie Newparagraph Note Paragraf Default
latime = ajustat DIMENSION
inaltime = ajustat DIMENSION
inaltime = ajustat DIMENSION
titlu = TEXT
subtitlu = TEXT
autor = TEXT
nx = NUMMER
ny = NUMMER
culoare = COLOR
optiune = xml max
textlayer = NAME
locatie = bordurastanga borduradreapta inmargine marginestanga marginedreapta text inalt niciunul
distanta = DIMENSION
spatiu = da
buffer = BUFFER

\seteazacomentariupagina [...,..^{*}...,...]

* locatie = stanga dreapta sus subsol niciunul
stare = start stop niciunul
offset = DIMENSION
distanta = DIMENSION
latime = DIMENSION
inaltime = DIMENSION

\seteazaculoare [...^{*}...]

* FILE

\seteazaculori [...,..^{*}...,...]

* stare = start stop
spot = da nu
expansiune = da nu
factor = da nu
rgb = da nu
cmyk = da nu
conversie = da nu totdeauna
pagecolormodel = auto niciunul NAME
culoaretext = COLOR
intent = overprint knockout niciunul

\seteazadescriere [...,¹...] [...,²...,...]

1 NAME OPT
2 inherits: \setupdescription

```

\seteazadimensiunihartie [...] [...]
1 NAME OPT
2 sus = BEFEHL
  jos = BEFEHL
  stanga = BEFEHL
  dreapta = BEFEHL
  metoda = normal niciunul NAME
  scala = NUMMER
  nx = NUMMER
  ny = NUMMER
  dx = DIMENSION
  dy = DIMENSION
  latime = DIMENSION
  inaltime = DIMENSION
  spatiusus = DIMENSION
  spatiuspate = DIMENSION
  offset = DIMENSION
  pagina = reset vedere oglindit negativ rotat 90 180 270 NAME
  hartie = reset vedere oglindit negativ rotat 90 180 270 NAME
  optiune = ajustat max
  distanta = DIMENSION

```

```

\seteazadimensiunihartie [...] [...]
1 reset vedere oglindit negativ rotat 90 180 270 NAME OPT
2 reset vedere oglindit negativ rotat 90 180 270 NAME

```

```

\seteazaecraninteractiune [...]
* latime = ajustat max tight DIMENSION
  inaltime = ajustat max tight DIMENSION
  spatiuspate = DIMENSION
  offsetoriz = DIMENSION
  veroffset = DIMENSION
  spatiusus = DIMENSION
  optiune = ajustat max ofata douafete semncarte auto niciunul implicit fixat vedere portrait pagina foaie
  attachment layer titlu lefttoright righttopleft nomenubar
  copies = NUMMER
  print = LISTE
  intarziere = niciunul NUMMER

```

```

\seteazaelemente [...] [...]
1 NAME OPT
2 alternativ = stanga dreapta sus subsol inmarginie
  latimetext = DIMENSION
  latime = DIMENSION
  distanta = DIMENSION
  simbol = niciunul NAME
  aliniere = stanga centru dreapta flushleft flushright intern extern marginie
  textalign = stanga centru dreapta flushleft flushright intern extern
  n = NUMMER
  inainte = BEFEHL
  dupa = BEFEHL
  intre = BEFEHL

```

```

\seteazaenumerare [...] [...]
1 NAME OPT
2 inherits: \setupenumeration

```

```

\seteazafiguriexterne [...] [...]
1 NAME OPT
2 inherits: \setupexternalfigure

```

```

\seteazaafloat [...1,...] [...2,...]
1 SINGULAR OPT
2 aliniaturmator = da nu auto
implicit = inherits: \placefloat
fallback = inherits: \placefloat
intern = BEFEHL
criteriu = DIMENSION
metoda = NUMMER
sidemethod = NUMMER
textmethod = NUMMER
sidealign = inaltime adancime linie jumatatelinie grila normal
grid = inherits: \snaptogrid
local = da nu
comanda = \...#1
availablewidth = DIMENSION
availableheight = DIMENSION
latimeminima = DIMENSION
latimemaxima = DIMENSION
locatie = stanga dreapta centru flushleft flushright center max intern extern innermargin outermargin
inneredge outeredge spatiuspace cutspace marginestanga marginedreapta bordurastanga
borduradreapta

distantamarginestanga = DIMENSION
distantamarginedreapta = DIMENSION
marginestanga = DIMENSION
marginedreapta = DIMENSION
innermargin = DIMENSION
outermargin = DIMENSION
bottombefore = BEFEHL
bottomafter = BEFEHL
expansiune = da nu xml
referenceprefix = + - TEXT
xmlsetup = NAME
catcodes = NAME
freeregion = da nu
distantasus = DIMENSION NUMMER
distantajos = DIMENSION NUMMER
spatiuinainte = niciunul inherits: \blanc
spatiudupa = niciunul inherits: \blanc
latime = DIMENSION
inaltime = DIMENSION
offset = DIMENSION niciunul overlay
spatiulateralinainte = niciunul inherits: \blanc
spatiulateraldupa = niciunul inherits: \blanc
spacebeforeside = niciunul inherits: \blanc
spaceafterside = niciunul inherits: \blanc
sidethreshold = old dimension
margine = DIMENSION
nsus = NUMMER
njos = NUMMER
pas = mic mediu mare linie adancime
nlinii = NUMMER
cache = da nu
compress = da nu
compressdistance = DIMENSION
inherits: \seteazainconjurat

```

```

\seteazafloats [...1,...] [...2,...]
1 SINGULAR OPT
2 inherits: \seteazaafloat

```

```

\seteazafonttext [...*,...]
* DIMENSION NAME global resOT mentine x xx mic mare script scriptscript rm ss tt hw cg roman serif regular sans
sansserif suport type teletype mono scrismmanual caligrafic

```

```

\seteazaformulare [...*,...]
* metoda = XML HTML PDF
export = da nu

```

```

\seteazaformule [...] 1 [...] 2 [...]
1 NAME OPT
2 locatie = stanga dreapta atleftmargin atrightmargin intern extern
alinie = stanga centru dreapta flushleft flushright inclinat
split = da nu linie NAME
strut = da nu
numberstrut = da nu totdeauna
stanga = BEFEHL
dreapta = BEFEHL
spatiuinainte = niciunul inherits: \blanc
spatiudupa = niciunul inherits: \blanc
spaceinbetween = inherits: \seteazaspatiualb
comandanumar = \...#1
stilnumar = STYLE BEFEHL
culoarenumar = COLOR
optiune = impachetat tight centru adancime linie jumatatelinie -linie -jumatatelinie incadrat mic
DIMENSION
margine = da nu standard DIMENSION
marginestanga = da nu standard DIMENSION
marginedreapta = da nu standard DIMENSION
distantamargine = numar DIMENSION
distantamarginestanga = numar DIMENSION
rightmargidistance = numar DIMENSION
alternativ = implicit single multi NAME
aliniaturmator = da nu auto
grid = inherits: \snaptogrid
referenceprefix = + - TEXT
numberthreshold = DIMENSION
order = reverse
numberlocation = overlay
numbermethod = down
textmargin = DIMENSION
penalties = NAME
spatiereinterliniara = DIMENSION
textdistance = DIMENSION
splitmethod = primul ultim ambele
setups = NAME
snap = da nu
snapstep = reset mic mediu mare linie
fonttext = inherits: \seteazafonttext
stil = STYLE BEFEHL
culoare = COLOR
functionstyle = STYLE BEFEHL
functioncolor = COLOR
latime = DIMENSION
numberdistance = DIMENSION
numberstate = auto
mathematics = NAME
gridcorrection = inherits: \setgridcorrection
inherits: \setupcounter

```

```

\seteazafundal [...] 1 [...] 2 [...]
1 NAME OPT
2 stare = start stop
offsetstanga = DIMENSION
offsetdreapta = DIMENSION
offsetsus = DIMENSION
offsetjos = DIMENSION
inainte = BEFEHL
dupa = BEFEHL
inherits: \seteazainconjurat

```

```

\seteazafundaluri [...] 1 [...] 2 [...] 3 [...]
1 sus antet text subsol subsol OPT
2 bordurastanga marginestanga text marginedreapta borduradreapta
3 inherits: \seteazainconjurat

```

```

\seteazafundaluri [...] 1 [...] 2 [...]
1 foaie pagina paginastanga 3 paginadreapta text ascuns
2 stare = start stop repetat
offset = DIMENSION
inaltime = DIMENSION
inherits: \seteazainconjurat

```

```

\seteazagrosimelinie [...]
* mic mediu mare DIMENSION

```

\seteazaimpartireafloat [...¹...²...]

* inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL
linii = auto NUMMER
conversie = NAME

\seteazainconjurat [...¹...] [...²...]

1 NAME OPT
2 colt = rectangular rotund NUMMER l r b t lr rl tb bt rt tr rb br bl lb tl lt trb rtl tlb blt ltr rtl
lbr rbl ltrb trbl rblt bltr
coltframe = rectangular rotund NUMMER l r b t lr rl tb bt rt tr rb br bl lb tl lt trb rtl tlb blt ltr rtl
lbr rbl ltrb trbl rblt bltr
coltfundal = rectangular rotund NUMMER l r b t lr rl tb bt rt tr rb br bl lb tl lt trb rtl tlb blt ltr rtl
lbr rbl ltrb trbl rblt bltr
raza = DIMENSION
razaframe = DIMENSION
razafundal = DIMENSION
inaltime = DIMENSION
adancimeframe = DIMENSION
adancimefundal = DIMENSION
culoareframe = COLOR
framesus = on dezactivat mic dash NAME
framejos = on dezactivat mic dash NAME
framestanga = on dezactivat mic dash NAME
framedreapta = on dezactivat mic dash NAME
region = da nu
grosimerigla = DIMENSION
offsetframe = DIMENSION
frame = on dezactivat overlay mic dash closed niciunul
fundal = primplan culoare NAME
offsetfundal = incadrat DIMENSION
culoarefundal = COLOR
component = NAME
extras = BEFEHL
foregroundstyle = STYLE BEFEHL
foregroundcolor = COLOR
setups = NAME
offset = implicit overlay niciunul DIMENSION
latime = local ajustat max broad fixat DIMENSION
inaltime = ajustat max broad DIMENSION
inaltimeminima = DIMENSION
aliniere = inherits: \seteazaalinierea
strut = da nu niciunul local global
autostrut = da nu
locatie = inaltime adancime inalt jos sus centru subsol linie lohi suspendat mentine formula matematica
normal inline
autolatime = da nu fortat
linii = NUMMER
sus = BEFEHL
jos = BEFEHL
blanc = da nu
profile = NAME
gol = da nu
loffset = DIMENSION
roffset = DIMENSION
toffset = DIMENSION
boffset = DIMENSION
orientation = NUMMER
anchoring = normal up down stanga dreapta sus subsol NAME
xanchor = DIMENSION
yanchor = DIMENSION
linedirection = normal reverse
dashstep = DIMENSION
synchronize = da nu text fundal
adaptive = da delay NUMMER
freezespaceing = NUMMER

\seteazaingust [...¹...] [...²...]

1 NAME OPT
2 stanga = DIMENSION
mijloc = DIMENSION
dreapta = DIMENSION
implicit = [-+]stanga [-+]centru [-+]dreapta NUMMER*stanga NUMMER*centru NUMMER*dreapta reset
inainte = BEFEHL
dupa = BEFEHL

```

\seteazainteractiunea [...] [...]
1 NAME OPT
2 stare = start stop
  stil = STYLE BEFEHL
  culoare = COLOR
  culoarecontrast = COLOR
  titlu = TEXT
  subtitlu = COLOR
  autor = TEXT
  data = TEXT
  keyword = TEXT
  focus = standard incadrat latime latimeminima inaltime inaltimeminima ajustat tight
  meniu = on dezactivat
  fieldlayer = auto NAME
  calculeaza = REFERENCE
  click = da nu
  display = normal nou
  pagina = da nu pagina nume auto
  actiunedeschidere = REFERENCE
  actiuneinchidere = REFERENCE
  actiunedeschiderepagina = REFERENCE
  actiuneinchiderepagina = REFERENCE
  setsimbol = NAME
  inaltime = DIMENSION
  inaltime = DIMENSION
  focusoffset = DIMENSION
  prefix = TEXT

```

```

\seteazainteractiunea [...]
* NAME OPT

```

```

\seteazajos [...] [...]
1 text margine bordura
2 stare = start stop gol inalt niciunul normal faramarcare NAME
  stil = STYLE BEFEHL
  culoare = COLOR
  strut = da nu
  n = NUMMER
  inainte = BEFEHL
  dupa = BEFEHL
  textstanga = TEXT
  textmijloc = TEXT
  textdreapta = TEXT
  stilstanga = STYLE BEFEHL
  middlestyle = STYLE BEFEHL
  stildreapta = STYLE BEFEHL
  culoarestanga = COLOR
  middlecolor = COLOR
  culoaredreapta = COLOR
  latime = DIMENSION
  latimestanga = DIMENSION
  middlewidth = DIMENSION
  marginedreapta = DIMENSION

```

```

\seteazalegenda    [...,1...]    [...,2...,...]
1  NAME              OPT
2  suffix             = BEFEHL
   suffixseparator    = BEFEHL
   suffixstopper      = BEFEHL
   locatie            = stanga dreapta centru jos inalt grila linii overlay intern extern innermargin outermargin
                       marginestanga marginedreapta lefthanging righthanging suspenda sus subsol dilatat tolerant
                       foartetolerant niciunul implicit

   comanda            = \...#1
   comandanumar       = \...#1
   comandatext        = \...#1
   spatiuinainte      = inherits: \blanc
   spaceinbetween     = inherits: \blanc
   spatiudupa         = inherits: \blanc
   distanta           = DIMENSION
   stiltitlu          = STYLE BEFEHL
   culoaretitlu       = COLOR
   headseparator      = TEXT
   intre              = BEFEHL
   stil               = STYLE BEFEHL
   culoare            = COLOR
   offsetsus          = DIMENSION
   offsetjos          = DIMENSION
   numar             = da nu niciunul
   group              = TEXT
   marginestanga      = DIMENSION
   marginedreapta     = DIMENSION
   innermargin        = DIMENSION
   outermargin        = DIMENSION
   aliniere           = inherits: \seteazaalinierea
   latime             = ajustat max DIMENSION
   latimeminima       = ajustat DIMENSION
   latimemaxima       = DIMENSION
   suspenda           = da nu
   mode               = NAME
   inherits: \setupcounterinherits: \seteazainconjurat

```

```

\seteazalegendele  [...,1...]    [...,2...,...]
1  NAME              OPT
2  inherits: \seteazalegenda

```

```

\seteazaliniesilabe  [...,*...,...]
*  semn = normal larg

```

```

\seteazaliniesubtire  [...,*...,...]
*  inaltime          = max DIMENSION
   inaltime          = max DIMENSION
   fundal            = culoare
   frame             = on dezactivat
   grosimerigla      = DIMENSION
   alternativ         = a b c niciunul
   culoarefundal     = COLOR
   culoare           = COLOR
   spatiereinterliniara = mic mediu mare NUMMER
   inainte           = BEFEHL
   dupa              = BEFEHL
   intre             = BEFEHL
   n                 = NUMMER
   on                = DIMENSION
   dezactivat        = DIMENSION

```

```

1  NAME                                OPT
2  optiune                            =  impachetat
   inainte                           =  BEFEHL
   dupa                              =  BEFEHL
   intre                             =  BEFEHL
   aliniat                           =  inherits: \seteazaaliniat
   aliniere                          =  inherits: \seteazaalinierea
   spatiu                            =  da on dezactivat fixat implicit
   comanda                           =  BEFEHL
   stil                              =  STYLE BEFEHL
   culoare                           =  COLOR
   stanga                            =  BEFEHL
   dreapta                           =  BEFEHL
   indentlist                        =  DIMENSION *
   keptogether                       =  paragraf

```

```
1  NUMMER
2  inherits: \setupmarginrule
```

```
*      latime      = max DIMENSION
      inaltime    = max DIMENSION
      inaltime    = max DIMENSION
      distanta    = DIMENSION
      n           = NUMMER
      alternativ   = a b
      stil        = STYLE BEFEHL
      culoare     = COLOR
      type        = mp da nu
      mp          = NAME
      grosimerigla = DIMENSION
      shrink      = DIMENSION
      dilatat     = DIMENSION
      on          = DIMENSION
      dezactivat  = DIMENSION
      snapping    = da normal 0 1 2 0:10 1:10 2:10 2:20 1:top 1:bottom 2:top 2:bottom
```

*	inainte	=	BEFEHL
	dupa	=	BEFEHL
	margin	=	DIMENSION
	latime	=	DIMENSION
	distanta	=	DIMENSION
	grosimerigla	=	DIMENSION
	culoare	=	COLOR

```

\seteazalista    [...,1...]    [...,2...,...]
1  LISTE
2  stare          = start stop
    locatie       = niciunul aici
    type          = simple comanda userdata
    criteriu      = local intro referinta SECTIONBLOCK:referinta tot SECTIONBLOCK:tot text SECTIONBLOCK:text
                  curent SECTIONBLOCK:curent aici precedent SECTIONBLOCK:precedent componenta ABSCHNITT
                  SECTIONBLOCK:ABSCHNITT
    lista         = NAME
    latime        = ajustat broad DIMENSION
    inaltime      = ajustat broad DIMENSION
    inaltime      = ajustat broad DIMENSION
    simbol        = unu doi trei niciunul implicit
    eticheta      = da nu niciunul NAME
    starter       = BEFEHL
    stopper       = BEFEHL
    comanda       = \...#1#2#3
    comandanumar  = \...#1
    comandatext   = \...#1
    comandapagina = \...#1
    numarpagina   = da nu totdeauna realpage
    numartitlu    = da nu totdeauna
    inainte       = BEFEHL
    dupa          = BEFEHL
    intre         = BEFEHL
    margine       = niciunul DIMENSION
    marginestanga = DIMENSION
    marginedreapta = DIMENSION
    distanta      = niciunul DIMENSION
    alinieretitlu = da nu
    numberalign   = stanga dreapta centru flushleft flushright intern extern
    aliniere      = inherits: \seteazaalinierea
    suspenda      = da nu
    stanga        = BEFEHL
    dreapta       = BEFEHL
    interactiune  = da nu tot numar text titlu pagina numarsetiune numarpagina
    limittext     = da nu TEXT
    stil          = STYLE BEFEHL
    culoare       = COLOR
    stilnumar     = STYLE BEFEHL
    culoarenumar  = COLOR
    stiltext      = STYLE BEFEHL
    culoaretext   = COLOR
    stilpagina    = STYLE BEFEHL
    culoarepagina = COLOR
    referinta     = NUMMER
    extras         = NAME
    order         = comanda tot titlu
    nivele        = NUMMER
    alternativ     = a b c d e f g stanga dreapta sus subsol comanda niciunul interactive paragraf orizontal
                  vertical NAME
    latimemaxima  = DIMENSION
    pageprefix    = da nu
    pageprefixseparatorset = NAME
    pageprefixconversionset = NAME
    pageprefixset = NAME
    pageprefixsegments = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
                  ABSCHNITT:tot curent
    pageprefixconnector = BEFEHL PROCESSOR->BEFEHL
    pageconversionset = NAME
    pagestarter   = BEFEHL PROCESSOR->BEFEHL
    pagestopper   = BEFEHL PROCESSOR->BEFEHL
    inherits: \setupcounterinherits: \seteazainconjurat

```

```

\seteazalistacombinata [...,1...]    [...,2...,...]
1  LISTE
2  criteriu      = local intro referinta SECTIONBLOCK:referinta tot SECTIONBLOCK:tot text SECTIONBLOCK:text curent
                  SECTIONBLOCK:curent aici precedent SECTIONBLOCK:precedent componenta ABSCHNITT SECTIONBLOCK:ABSCHNITT
    referinta    = NUMMER
    extras       = NAME
    order        = comanda tot titlu
    alternativ    = a b c d e f g stanga dreapta sus subsol comanda niciunul interactive paragraf orizontal vertical
                  NAME

```

```

\setareCOMBINEDLIST [...,*...,...]
* inherits: \seteazalistacombinata
instances: content

```

```
\setarecontent    [...,\stackrel{*}{=},...]
* inherits: \seteazalistacombinata
```

```
\seteazamajuscule  [...,\stackrel{1}{=},...]  [...,\stackrel{2}{=},...]
1  NAME                                OPT
2  category = NUMMER
   xscala   = NUMMER
   yscala   = NUMMER
   weight    = NUMMER
   titlu     = da nu
   sc        = da nu
   stil      = STYLE BEFEHL
```

```
\seteazamakeup     [...,\stackrel{1}{=},...]  [...,\stackrel{2}{=},...]
1  NAME                                OPT
2  pagina     = inherits: \pagina
   comanda    = BEFEHL
   latime     = DIMENSION
   inaltime   = DIMENSION
   aliniere   = inherits: \seteazaalinierea
   setups     = NAME
   sus        = BEFEHL
   jos        = BEFEHL
   inainte    = BEFEHL
   dupa       = BEFEHL
   locatie    = sus
   referinta  = REFERENCE
   pagestate  = start stop
   stareantet = start stop inalt gol niciunul normal
   staresubsol = start stop inalt gol niciunul normal
   staresus   = start stop inalt gol niciunul normal
   starejos   = start stop inalt gol niciunul normal
   staretext  = start stop inalt gol niciunul normal
   douafete   = da nu gol
   stil       = STYLE BEFEHL
   culoare    = COLOR
   eticheta   = TEXT
```

```
\seteazamarcaje    [...,\stackrel{1}{=},...]  [...,\stackrel{2}{=},...]
1  BESCHRIFTUNG                        OPT
2  stare      = start stop
   expansiune = da nu
   separator  = BEFEHL
   filtercommand = \...#1
```

```
\seteazamediulfonttext  [...,\stackrel{1}{=},...]  [...,\stackrel{2}{=},...]  [...,\stackrel{3}{=},...]
1  NAME                                OPT                                OPT
2  implicit DIMENSION
3  inherits: \definestemediulfonttext
```

```

\seteazameniuiinteractiune  [...] 1 [...] [...] 2 [...]
1  NAME                      OPT
2  alternativ                  = vertical orizontal ascuns
   category                   = NAME
   offsetstanga               = overlay incadrat niciunul implicit DIMENSION
   offsetdreapta              = overlay incadrat niciunul implicit DIMENSION
   offsetsus                  = overlay incadrat niciunul implicit DIMENSION
   offsetjos                  = overlay incadrat niciunul implicit DIMENSION
   latimemaxima               = DIMENSION
   inaltimemaxima             = DIMENSION
   itemalign                  = stanga centru dreapta flushleft flushright jos inalt lohi
   stare                      = start gol local
   stanga                     = BEFEHL
   dreapta                    = BEFEHL
   distanta                   = overlay DIMENSION
   inainte                    = BEFEHL
   dupa                       = BEFEHL
   intre                      = BEFEHL
   pozitie                    = da nu
   mijloc                     = BEFEHL
   stil                       = STYLE BEFEHL
   culoare                    = COLOR
   aceeasipagina              = da nu gol niciunul normal implicit
   culoarecontrast            = COLOR
   inherits: \seteazainconjurat

```

```
\seteazaminicitat    [...,...*=...,...]
* inherits: \setupdelimitedtext
```

```
\seteazanotasubsol    [...,..*=...,...]
* inherits: \setupnote
```

```
\setezanumarpagina    [...,*...,...]  
*   viewerprefix      = TEXT  
    stare              = start stop niciunul mentine gol  
    eticheta           = TEXT  
    inherits: \setupcounter
```

```
\setezanumarsubpagina    [...*=*,...]
* inherits: \setupcounter
```

```
\setezanumartitlu      [..1]      [..2]
1  ABSCHNITT
2  [-+]NUMBER
```

```

\seteazanumerotarelinii    [...] 1 [...] [...] 2 [...]
                                OPT
1  NAME
2  start      =  NUMMER
   pas       =  NUMMER
   metoda    =  pagina primul urmatorul
   conversie =  NAME
   continua  =  da nu
   locatie   =  text begin end implicit stanga dreapta intern extern instanga indreapta margine inmarginare
   distanta  =  DIMENSION
   aliniere  =  intern extern flushleft flushright stanga dreapta centru auto
   comanda   =  \...#1
   stanga    =  BEFEHL
   dreapta   =  BEFEHL
   margine   =  DIMENSION
   latime    =  margine DIMENSION
   stil      =  STYLE BEFEHL
   culoare   =  COLOR

```

\seteazanumerotarepagina [...^{*}...]

* alternativ = ofata douafete
pagina = inherits: \pagina
strut = da nu
comanda = \...#1
stanga = BEFEHL
dreapta = BEFEHL
stare = start stop
latime = DIMENSION
locatie = antet subsol stanga centru dreapta instanga indreapta margine inmargin lamargine marginebordura
niciunul
stil = STYLE BEFEHL
culoare = COLOR

\seteazanumerotareparagrafe [...^{*}...]

* stare = start stop linie reset
distanta = DIMENSION
stil = STYLE BEFEHL
culoare = COLOR

\seteazapaleta [...]

* NAME

\seteazaparafrage [...¹...] [...²...] [...³...]

1 NAME OPT OPT
2 fiecare NUMBER
3 n = NUMBER
inainte = BEFEHL
dupa = BEFEHL
latime = DIMENSION
distanta = DIMENSION
inaltime = DIMENSION ajustat
sus = BEFEHL
jos = BEFEHL
aliniere = inherits: \seteazaalinierea
intern = BEFEHL
comanda = BEFEHL
rigla = on dezactivat
grosimerigla = DIMENSION
culoareringla = COLOR
stil = STYLE BEFEHL
culoare = COLOR
directie = normal reverse

\seteazaparafrage [...¹...] [...²...]

1 NAME NAME:NUMBER OPT
2 n = NUMBER
inainte = BEFEHL
dupa = BEFEHL
latime = DIMENSION
distanta = DIMENSION
inaltime = DIMENSION ajustat
sus = BEFEHL
jos = BEFEHL
aliniere = inherits: \seteazaalinierea
intern = BEFEHL
comanda = BEFEHL
rigla = on dezactivat
grosimerigla = DIMENSION
culoareringla = COLOR
stil = STYLE BEFEHL
culoare = COLOR

\seteazaplasareaopozita [...^{*}...]

* stare = start stop
inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL

\seteazaprograme [...^{*}...]

* stil = STYLE BEFEHL
culoare = COLOR

\seteazareferinte [...] ¹ [...] ² [...]

* stare = start stop
 expansiune = da nu xml
 autofile = da nu
 export = da nu
 stanga = BEFEHL
 dreapta = BEFEHL
 latime = DIMENSION
 douafete = da nu
 interactiune = eticheta text simbol tot
 separator = BEFEHL
 prefix = + - TEXT
 labelalternative = inmarginestanga inmarginestanga inoutermargin ininnermargin inpartestanga inpartestanga inouteredge ininneredge atleftmargin atrightmargin instanga indreapta inouter ininner inmargin
 labelstyle = STYLE BEFEHL
 labelcolor = COLOR

\seteazaregistru [...] ¹ [...] ² [...]

1 NAME NAME:NUMMER OPT
 2 referencemethod = avans
 expansiune = da nu xml
 numarpropriu = da nu
 xmlsetup = NAME
 alternativ = a b A B
 metoda = implicit inainte dupa primul ultim ch mm zm pm mc zc pc uc
 compress = da nu tot impachetat text
 check = da nu
 criteriu = local text curent precedent tot ABSCHNITT
 pageprefixseparatorset = BEFEHL
 pageprefixconversionset = NAME
 pageprefixstarter = BEFEHL PROCESSOR->BEFEHL
 pageprefixstopper = BEFEHL PROCESSOR->BEFEHL
 pageprefixset = NAME
 pageprefixsegments = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
 ABSCHNITT:tot curent
 pageprefixconnector = BEFEHL
 pageprefix = da nu
 pageseparatorset = NAME
 pageconversionset = NAME
 pagestarter = BEFEHL PROCESSOR->BEFEHL
 pagestopper = BEFEHL PROCESSOR->BEFEHL
 pagesegments = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot
 latimemaxima = DIMENSION
 indicator = da nu
 inainte = BEFEHL
 dupa = BEFEHL
 comanda = \...#1
 comandatext = \...#1
 deeptextcommand = \...#1
 comandapagina = \...#1
 distanta = DIMENSION
 interactiune = text numarpagina
 numarpagina = da nu
 simbol = a n niciunul 1 2 BEFEHL
 language = implicit DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scen SPRACHE
 stil = STYLE BEFEHL
 culoare = COLOR
 stiltext = STYLE BEFEHL
 culoaretex = COLOR
 stilpagina = STYLE BEFEHL
 culoarepagina = COLOR
 pageleft = BEFEHL
 pageright = BEFEHL
 n = NUMMER
 balanta = da nu
 aliniere = inherits: \seteazaalinierea
 numberorder = numere
 pagemethod = pagina sectiune

	$\dots^1, \dots$	$\dots^2, \dots$	$\dots^3, \dots$
1 NAME	OPT	OPT	
2 NUMMER			
3 referencemethod	=	avans	
expansiune	=	da nu xml	
numarpropriu	=	da nu	
xmlsetup	=	NAME	
alternativ	=	a b A B	
metoda	=	implicit inainte dupa primul ultim ch mm zm pm mc zc pc uc	
compress	=	da nu tot impachetat text	
check	=	da nu	
criteriu	=	local text curent precedent tot ABSCHNITT	
pageprefixseparatorset	=	BEFEHL	
pageprefixconversionset	=	NAME	
pageprefixstarter	=	BEFEHL PROCESSOR->BEFEHL	
pageprefixstopper	=	BEFEHL PROCESSOR->BEFEHL	
pageprefixset	=	NAME	
pageprefixsegments	=	NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:* ABSCHNITT:tot curent	
pageprefixconnector	=	BEFEHL	
pageprefix	=	da nu	
pageseparatorset	=	NAME	
pageconversionset	=	NAME	
pagestarter	=	BEFEHL PROCESSOR->BEFEHL	
pagestopper	=	BEFEHL PROCESSOR->BEFEHL	
pagesegments	=	NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot	
latimemaxima	=	DIMENSION	
indicator	=	da nu	
inainte	=	BEFEHL	
dupa	=	BEFEHL	
comanda	=	\...#1	
comandatext	=	\...#1	
deeptextcommand	=	\...#1	
comandapagina	=	\...#1	
distanta	=	DIMENSION	
interactiune	=	text numarpagina	
numarpagina	=	da nu	
simbol	=	a n niciunul 1 2 BEFEHL	
language	=	implicit DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scen SPRACHE	
stil	=	STYLE BEFEHL	
culoare	=	COLOR	
stiltext	=	STYLE BEFEHL	
culoaretext	=	COLOR	
stilpagina	=	STYLE BEFEHL	
culoarepagina	=	COLOR	
pageleft	=	BEFEHL	
pageright	=	BEFEHL	
n	=	NUMMER	
balanta	=	da nu	
alinie	=	inherits: \seteazaalinie	
numberorder	=	numere	
pagemethod	=	pagina sectiune	

```

\setareREGISTER      [...,1...]      [...,2...,...]
1  NUMMER              OPT
2  referencemethod     = avans
   expansiune          = da nu xml
   numarpropriu        = da nu
   xmlsetup            = NAME
   alternativ           = a b A B
   metoda              = implicit inainte dupa primul ultim ch mm zm pm mc zc pc uc
   compress            = da nu tot impachetat text
   check               = da nu
   criteriu            = local text curent precedent tot ABSCHNITT
   pageprefixseparatorset = BEFEHL
   pageprefixconversionset = NAME
   pageprefixstarter   = BEFEHL PROCESSOR->BEFEHL
   pageprefixstopper   = BEFEHL PROCESSOR->BEFEHL
   pageprefixset       = NAME
   pageprefixsegments  = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
                        ABSCHNITT:tot curent
   pageprefixconnector = BEFEHL
   pageprefix          = da nu
   pageseparatorset    = NAME
   pageconversionset    = NAME
   pagestarter         = BEFEHL PROCESSOR->BEFEHL
   pagestopper         = BEFEHL PROCESSOR->BEFEHL
   pagesegments        = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot
   latimemaxima        = DIMENSION
   indicator           = da nu
   inainte             = BEFEHL
   dupa                = BEFEHL
   comanda             = \...#1
   comandatext         = \...#1
   deeptextcommand     = \...#1
   comandapagina       = \...#1
   distanta            = DIMENSION
   interactiune        = text numarpagina
   numarpagina         = da nu
   simbol              = a n niciunul 1 2 BEFEHL
   language            = implicit DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scn SPRACHE
   stil                = STYLE BEFEHL
   culoare             = COLOR
   stiltext            = STYLE BEFEHL
   culoaretext         = COLOR
   stilpagina          = STYLE BEFEHL
   culoarepagina       = COLOR
   pageleft            = BEFEHL
   pageright           = BEFEHL
   n                   = NUMMER
   balanta             = da nu
   aliniere            = inherits: \seteazaalinierea
   numberorder         = numere
   pagemethod          = pagina sectiune

instances: index

```

\setareindex [...¹,...] [...²,...]

1	NUMMER	OPT	
2	referencemethod	=	avans
	expansiune	=	da nu xml
	numarpropriu	=	da nu
	xmlsetup	=	NAME
	alternativ	=	a b A B
	metoda	=	implicit inainte dupa primul ultim ch mm zm pm mc zc pc uc
	compress	=	da nu tot impachetat text
	check	=	da nu
	criteriu	=	local text curent precedent tot ABSCHNITT
	pageprefixseparatorset	=	BEFEHL
	pageprefixconversionset	=	NAME
	pageprefixstarter	=	BEFEHL PROCESSOR->BEFEHL
	pageprefixstopper	=	BEFEHL PROCESSOR->BEFEHL
	pageprefixset	=	NAME
	pageprefixsegments	=	NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:* ABSCHNITT:tot curent
	pageprefixconnector	=	BEFEHL
	pageprefix	=	da nu
	pageseparatorset	=	NAME
	pageconversionset	=	NAME
	pagestarter	=	BEFEHL PROCESSOR->BEFEHL
	pagestopper	=	BEFEHL PROCESSOR->BEFEHL
	pagesegments	=	NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot
	latimemaxima	=	DIMENSION
	indicator	=	da nu
	inainte	=	BEFEHL
	dupa	=	BEFEHL
	comanda	=	\...#1
	comandatext	=	\...#1
	deeptextcommand	=	\...#1
	comandapagina	=	\...#1
	distanța	=	DIMENSION
	interactiune	=	text numarpagina
	numarpagina	=	da nu
	simbol	=	a n niciunul 1 2 BEFEHL
	language	=	implicit DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scن SPRACHE
	stil	=	STYLE BEFEHL
	culoare	=	COLOR
	stiltext	=	STYLE BEFEHL
	culoarettext	=	COLOR
	stilpagina	=	STYLE BEFEHL
	culoarepagina	=	COLOR
	pageleft	=	BEFEHL
	pageright	=	BEFEHL
	n	=	NUMMER
	balanta	=	da nu
	alinie	=	inherits: \seteazaalinie
	numberorder	=	numere
	pagemethod	=	pagina sectiune

\seteazarigletext [...^{*},...]

*	inainte	=	BEFEHL
	dupa	=	BEFEHL
	intre	=	BEFEHL
	grosimerigla	=	DIMENSION
	locatie	=	stanga inmarginie
	stil	=	STYLE BEFEHL
	culoare	=	COLOR
	culoarerigla	=	COLOR
	latime	=	DIMENSION
	inaltime	=	DIMENSION
	distanța	=	DIMENSION
	corectieadancime	=	on dezactivat
	fonttext	=	inherits: \seteazafonttext
	on	=	DIMENSION
	dezactivat	=	DIMENSION

\seteazarigleumplere [...,*=...,...]

* inainte = BEFEHL
dupa = BEFEHL
n = NUMBER
spatiereinterliniara = mic mediu mare NUMBER
distanta = DIMENSION
latime = ajustat broad DIMENSION
separator = BEFEHL
stil = STYLE BEFEHL
culoare = COLOR

\seteazarotare [...,*=...,...]

* locatie = ajustat broad adancime inalt centru implicit normal
rotatie = stanga dreapta intern extern NUMBER
inherits: \seteazainconjurat

\seteazasimbol [...]

* NAME

\seteazasinonime [...,¹...] [...,*=²...,...]

1 SINGULAR OPT
2 expansiune = da nu xml
alternativ = primul ultim normal NAME
urmatorul = BEFEHL
comanda = \...#1#2#3
comandatext = \...#1
synonymcommand = \...#1
language = implicit DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scن SPRACHE
metoda = implicit inainte dupa primul ultim ch mm zm pm mc zc pc uc
criteriu = curent precedent local text tot ABSCHNITT
stil = STYLE BEFEHL
culoare = COLOR
stiltext = STYLE BEFEHL
culoarettext = COLOR
stilsinonim = STYLE BEFEHL
culoaresinonim = COLOR
stanga = BEFEHL
dreapta = BEFEHL
inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL
hyphens = da nu
comanda = \...#1#2#3

\seteazasistem [...,*=...,...]

* n = NUMBER

\seteazasortare [...,¹...] [...,*=²...,...]

1 SINGULAR OPT
2 expansiune = da nu xml
alternativ = primul ultim normal NAME
urmatorul = BEFEHL
comanda = \...#1#2#3
comandatext = \...#1
synonymcommand = \...#1
language = implicit DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scن SPRACHE
metoda = implicit inainte dupa primul ultim ch mm zm pm mc zc pc uc
criteriu = curent precedent local text tot ABSCHNITT
stil = STYLE BEFEHL
culoare = COLOR
stiltext = STYLE BEFEHL
culoarettext = COLOR
stilsinonim = STYLE BEFEHL
culoaresinonim = COLOR
inainte = BEFEHL
dupa = BEFEHL

\seteazaspatiu [...]

* fixat impachetat broad fixed:small broad:small

\seteazaspatialb [...,*=...,...]

* fix fixat flexibil linie jumtatelinie quarterline niciunul mic mediu mare implicit DIMENSION

`\seteazaspatiuinterliniar` [¹...;...]_{OPT} [²...;...]

```
1 NAME
2 linie          = DIMENSION
  inaltime       = NUMBER
  inaltime       = NUMBER
  inaltime minima = NUMBER
  mindepth       = NUMBER
  distanta       = DIMENSION
  sus            = NUMBER inaltime
  jos            = NUMBER
  nsus           = NUMBER
  dilatata       = NUMBER
  shrink         = NUMBER
```

`\seteazaspatiuinterliniar` [...;...]

* on dezactivat reset auto mic mediu ma^{OPT}re NUMBER DIMENSION

`\seteazaspatiuinterliniar` [...]

* NAME

`\seteazastrut` [...]

* da nu auto cap aju^{OPT}stă linie implicit CHARACTER

`\seteazasubsol` [¹...] [²...;...]

```
1 text margine borduraOPT
2 stare          = start stop gol inaltime niciunul normal faramarcare NAME
  stil           = STYLE BEFEHL
  culoare        = COLOR
  strut          = da nu
  n              = NUMBER
  inainte        = BEFEHL
  dupa           = BEFEHL
  textstanga     = TEXT
  textmijloc     = TEXT
  textdreapta    = TEXT
  stilstanga     = STYLE BEFEHL
  middlestyle    = STYLE BEFEHL
  stildreapta    = STYLE BEFEHL
  culoarestanga  = COLOR
  middlecolor    = COLOR
  culoaredreapta = COLOR
  latime         = DIMENSION
  latimestanga   = DIMENSION
  middlewidth    = DIMENSION
  marginedreapta = DIMENSION
```

`\seteazasus` [¹...] [²...;...]

```
1 text margine borduraOPT
2 stare          = start stop gol inaltime niciunul normal faramarcare NAME
  stil           = STYLE BEFEHL
  culoare        = COLOR
  strut          = da nu
  n              = NUMBER
  inainte        = BEFEHL
  dupa           = BEFEHL
  textstanga     = TEXT
  textmijloc     = TEXT
  textdreapta    = TEXT
  stilstanga     = STYLE BEFEHL
  middlestyle    = STYLE BEFEHL
  stildreapta    = STYLE BEFEHL
  culoarestanga  = COLOR
  middlecolor    = COLOR
  culoaredreapta = COLOR
  latime         = DIMENSION
  latimestanga   = DIMENSION
  middlewidth    = DIMENSION
  marginedreapta = DIMENSION
```

\seteazatabele [...] ^{*}...]

* latimetext = DIMENSION max
 split = da nu repetat auto
 frame = on dezactivat
 NL = inherits: \blanc
 VL = mic mediu mare niciunul NUMMER
 HL = mic mediu mare niciunul NUMMER
 distanta = mic mediu mare niciunul
 aliniere = stanga centru dreapta
 comenzi = BEFEHL
 fonttext = inherits: \seteazafonttext
 grosimerigla = DIMENSION
 inaltime = strut NUMMER
 inaltime = strut NUMMER
 openup = DIMENSION

\seteazatabulatori [...] ¹ [...] ² [...] ³...]

1 NAME OPT OPT
 2 NAME
 3 format = TEMPLATE niciunul
 inainte = BEFEHL
 dupa = BEFEHL
 distanta = mic mediu mare niciunul blank adancime grila DIMENSION
 blanc = preferinta aceasipagina max fortat enable dezactivat faraalb impachetat inapot overlay
 totdeauna mentine weak strong implicit inainte intre dupa fixat flexibil niciunul mic mediu
 mare linie jumatatelinie halflinbefore halflinafter quarterline formula alb inaltime adancime
 standard NUMMER*mic NUMMER*mediu NUMMER*mare NUMMER*linie NUMMER*jumatatelinie NUMMER*quarterline
 NUMMER*formula NUMMER*alb NUMMER*inaltime NUMMER*adancime category:NUMMER order:NUMMER penalty:NUMMER
 DIMENSION NAME
 stiltitlu = STYLE BEFEHL
 culoaretitlu = COLOR
 fundal = NAME
 culoarefundal = COLOR
 foregroundstyle = STYLE BEFEHL
 foregroundcolor = COLOR
 aliniere = stanga centru dreapta dimension
 rigla = linie normal
 culoarerigla = COLOR
 grosimerigla = DIMENSION
 fonttext = inherits: \seteazafonttext
 aliniat = da nu
 split = da nu repetat auto
 unitate = DIMENSION
 margine = DIMENSION
 intern = BEFEHL
 EQ = BEFEHL
 antet = da repetat text
 frame = on dezactivat
 titlu = TEXT
 keeptogether = da nu
 dashstep = DIMENSION

\seteazatext [...] ¹ [...] ²...]

1 text margine bordura ^{OFF}
 2 stare = start stop gol inalt niciunul normal faramarcare NAME
 stil = STYLE BEFEHL
 culoare = COLOR
 strut = da nu
 n = NUMMER
 inainte = BEFEHL
 dupa = BEFEHL
 textstanga = TEXT
 textmijloc = TEXT
 textdreapta = TEXT
 stilstanga = STYLE BEFEHL
 middlestyle = STYLE BEFEHL
 stildreapta = STYLE BEFEHL
 culoarestanga = COLOR
 middlecolor = COLOR
 culoaredreapta = COLOR
 latime = DIMENSION
 latimestanga = DIMENSION
 middlewidth = DIMENSION
 marginedreapta = DIMENSION

<pre> \seteazatexteantet [...¹] [...²] [...³] [...⁴] [...⁵] 1 text margine bordura OPT OPT OPT OPT OPT 2 data numarpagina BESCHRIFTUNG TEXT BEFEHL 3 data numarpagina BESCHRIFTUNG TEXT BEFEHL 4 data numarpagina BESCHRIFTUNG TEXT BEFEHL 5 data numarpagina BESCHRIFTUNG TEXT BEFEHL </pre>
<pre> \seteazatextejos [...¹] [...²] [...³] [...⁴] [...⁵] 1 text margine bordura OPT OPT OPT OPT OPT 2 data numarpagina BESCHRIFTUNG TEXT BEFEHL 3 data numarpagina BESCHRIFTUNG TEXT BEFEHL 4 data numarpagina BESCHRIFTUNG TEXT BEFEHL 5 data numarpagina BESCHRIFTUNG TEXT BEFEHL </pre>
<pre> \seteazatextesubsol [...¹] [...²] [...³] [...⁴] [...⁵] 1 text margine bordura OPT OPT OPT OPT OPT 2 data numarpagina BESCHRIFTUNG TEXT BEFEHL 3 data numarpagina BESCHRIFTUNG TEXT BEFEHL 4 data numarpagina BESCHRIFTUNG TEXT BEFEHL 5 data numarpagina BESCHRIFTUNG TEXT BEFEHL </pre>
<pre> \seteazatextesus [...¹] [...²] [...³] [...⁴] [...⁵] 1 text margine bordura OPT OPT OPT OPT OPT 2 data numarpagina BESCHRIFTUNG TEXT BEFEHL 3 data numarpagina BESCHRIFTUNG TEXT BEFEHL 4 data numarpagina BESCHRIFTUNG TEXT BEFEHL 5 data numarpagina BESCHRIFTUNG TEXT BEFEHL </pre>
<pre> \seteazatextetext [...¹] [...²] [...³] [...⁴] [...⁵] 1 text margine bordura OPT OPT OPT OPT OPT 2 data numarpagina BESCHRIFTUNG TEXT BEFEHL 3 data numarpagina BESCHRIFTUNG TEXT BEFEHL 4 data numarpagina BESCHRIFTUNG TEXT BEFEHL 5 data numarpagina BESCHRIFTUNG TEXT BEFEHL </pre>
<pre> \setareLABELtext [...¹] [...²,...²,...] 1 SPRACHE OPT 2 KEY = VALUE instances: head label mathlabel taglabel unit operator prefix suffix btxlabel </pre>
<pre> \setarebtxlabeltext [...¹] [...²,...²,...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \setareheadtext [...¹] [...²,...²,...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \setarelabeltext [...¹] [...²,...²,...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \setaremathlabeltext [...¹] [...²,...²,...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \setareoperatorortext [...¹] [...²,...²,...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \setareprefixtext [...¹] [...²,...²,...] 1 SPRACHE OPT 2 KEY = VALUE </pre>

```
\setaresuffixtext    [...]1    [...,...2...,...]  
1    SPRACHE                    OPT  
2    KEY   =   VALUE
```

```
\setaretaglabeltext    [...]1    [...,...2...,...]  
1    SPRACHE                    OPT  
2    KEY   =   VALUE
```

```
\setareunittext    [...]1    [...,...2...,...]  
1    SPRACHE                    OPT  
2    KEY   =   VALUE
```

```

\seteazatitlu [...] 1 [...] 2 [...]
1 ABSCHNITT OPT
2 frontpartlabel = NAME
  bodypartlabel = NAME
  appendixlabel = NAME
  backpartlabel = NAME
  expansiune = da nu xml
  catcodes = NAME
  sectionresetset = NAME
  sectionseparatorset = NAME
  sectionconversionset = NAME
  conversie = NAME
  sectionstarter = BEFEHL PROCESSOR->BEFEHL
  sectionstopper = BEFEHL PROCESSOR->BEFEHL
  sectionset = NAME
  sectionsegments = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
                    ABSCHNITT:tot curent

  referenceprefix = + - TEXT
  stil = STYLE BEFEHL
  culoare = COLOR
  stiltext = STYLE BEFEHL
  culoaretex = COLOR
  stilnumar = STYLE BEFEHL
  culoarenumar = COLOR
  cuplare = ABSCHNITT
  numarpropriu = da nu
  beforesection = BEFEHL
  aftersection = BEFEHL
  insidesection = BEFEHL
  inaintetitlu = BEFEHL
  dupatitlu = BEFEHL
  numarincrement = da nu lista gol
  punetitlu = da nu ascuns gol sectiune
  numar = da nu
  pagina = inherits: \pagina
  marcaje = pagina reset nou
  antet = start stop inalt niciunul normal gol faramarcare NAME
  text = start stop inalt niciunul normal gol faramarcare NAME
  subsol = start stop inalt niciunul normal gol faramarcare NAME
  inainte = BEFEHL
  dupa = BEFEHL
  intre = BEFEHL
  continua = da nu
  alinieretitlu = da nu obiectmobil
  spatiereinterliniara = NAME
  interactiune = lista referinta
  internalgrid = NAME
  grid = normal standard da strict tolerant sus subsol ambele broad ajustat primul ultim inalt unu
        jos niciunul linie strut box min max centru math math:linie math:jumatatelinie math:-line
        math:-halflin NAME

  aliniere = inherits: \seteazaalinieria
  toleranta = inherits: \seteazatoleranta
  strut = da nu
  suspenda = linie broad ajustat niciunul NUMBER
  margine = DIMENSION
  aliniaturmator = da nu auto
  alternativ = text paragraf normal margine inmargine sus centru subsol reverse textmarginal NAME
  latime = DIMENSION
  numberwidth = DIMENSION
  latimetext = DIMENSION
  distanta = DIMENSION
  textdistance = DIMENSION
  comandainainte = BEFEHL
  comandadupa = BEFEHL
  comanda = \...#1#2
  comandatext = \...#1
  deeptextcommand = \...#1
  comandanumar = \...#1
  deepnumbercommand = \...#1
  locatie = NAME
  criteriu = strict pozitiv tot
  hidenumber = da nu
  extradata = BEFEHL
  snapping = da normal 0 1 2 0:10 1:10 2:10 2:20 1:top 1:bottom 2:top 2:bottom

```

```

\seteazatitluri [...] 1 [...] 2 [...]
1 ABSCHNITT OPT
2 inherits: \seteazatitlu

```

`\seteazatoleranta [...;...]`
 * orizontal vertical foarteststrict strict tolerant foartetolerant spatiu dilatat

`\seteazatranzitiepagina [...]`
 * reset auto start aleator NUMBER

`\seteazatype [...1;...] [...;...2...]`
 1 NAME OPT
 2 optiune = mp lua xml parsed-xml nested tex context niciunul NAME
 comanda = CSNAME
 stanga = BEFEHL
 dreapta = BEFEHL
 tab = da nu NUMBER
 compact = absolut ultim tot
 escape = da TEXT PROCESSOR->TEXT
 stil = STYLE BEFEHL
 culoare = COLOR
 linii = da nu normal despsilabe
 spatiu = on dezactivat normal fixat dilatat
 setups = NAME

`\seteazatyping [...1;...] [...;...2...]`
 1 NAME OPT
 2 margineimpara = DIMENSION
 marginepara = DIMENSION
 margine = da nu standard DIMENSION
 optiune = mp lua xml parsed-xml nested tex context niciunul NAME
 stil = STYLE BEFEHL
 culoare = COLOR
 aliniere = inherits: \seteazaalinierea
 linii = da nu normal despsilabe
 spatiu = on dezactivat normal fixat dilatat
 keepetogether = da nu paragraf
 inainte = BEFEHL
 dupa = BEFEHL
 strip = da nu NUMBER
 range = NUMBER NAME
 tab = da nu NUMBER
 paragraf = da nu
 escape = da TEXT PROCESSOR->TEXT
 aliniaturmator = da nu auto
 continua = da nu
 start = NUMBER
 stop = NUMBER
 pas = NUMBER
 numerotare = fisier linie nu
 blanc = inherits: \blanc
 fonttext = inherits: \seteazafonttext

`\seteazaur1 [...;...*...]`
 * stil = STYLE BEFEHL
 culoare = COLOR

`\setelementbackendtag [...1] [...2]`
 1 NAME
 2 BlockQuote Caption Code Div Formula H L Lbl LBody LI Link P Quote Reference Sect Span Table TBODY TD TFOOT TH
 THEAD TOC TOCI TR

`\setelementexporttag [...1] [...2] [...3]`
 1 NAME OPT
 2 export nature pdf
 3 inline display mixed

`\setelementexporttag [...1] [...2] [...3]`
 1 NAME
 2 nature
 3 inline display mixed

<code>\setelementexporttag</code> <code>[¹...]</code> <code>[²...]</code> <code>[³...]</code> 1 NAME 2 pdf 3 BlockQuote Caption Code Div Formula H L Lbl LBody LI Link P Quote Reference Sect Span Table TBody TD TFOOT TH THEAD TOC TOCI TR
<code>\setelementnature</code> <code>[¹...]</code> <code>[²...]</code> 1 NAME 2 inline display mixed
<code>\setemeasure</code> <code>{¹...}</code> <code>{²...}</code> 1 NAME 2 DIMENSION
<code>\setevalue</code> <code>{¹...}</code> <code>{²...}</code> 1 NAME 2 CONTENT
<code>\setevariable</code> <code>{¹...}</code> <code>{²...}</code> <code>{³...}</code> 1 NAME 2 KEY 3 VALUE
<code>\setevariables</code> <code>[¹...]</code> <code>[...²...]</code> 1 NAME 2 set = BEFEHL reset = BEFEHL KEY = VALUE
<code>\setexcept</code> <code>[¹...]</code> <code>{²...}</code> 1 stanga dreapta ^{OPT} 2 CONTENT
<code>\setexpandedCOMANDApameter</code> <code>{¹...}</code> <code>{²...}</code> 1 KEY 2 CONTENT
<code>\setexpandeddummysparameter</code> <code>{¹...}</code> <code>{²...}</code> 1 KEY 2 BEFEHL
<code>\setexpansion</code> <code>[[*]...]</code> * NAME ^{OPT}
<code>\setextrafontkerns</code> <code>[...]</code> * niciunul min max mixed reset ^{DEF}
<code>\setfirstline</code> <code>[[*]...]</code> * NAME ^{OPT}
<code>\setfirstpasscharacteralign</code>
<code>\setflag</code> <code>{[*]...}</code> * NAME
<code>\setfont</code> <code>[*]...</code> * FONT
<code>\setfontcolorscheme</code> <code>[[*]...]</code> * NAME

\setfontfeature {...} * NAME
\setfontsolution [...] * NAME
\setfontstrut
\setfractions
\setglobalscript [...] * hangul hanzi nihongo ethiopic thai test NAME
\setgmeasure {...} {...} 1 NAME 2 DIMENSION
\setgvalue {...} {...} 1 NAME 2 CONTENT
\setgvariable {...} {...} {...} 1 NAME 2 KEY 3 VALUE
\setgvariables [...] 1 NAME 2 set = BEFEHL reset = BEFEHL KEY = VALUE
\sethboxregister ... {...} 1 CSNAME NUMMER 2 CONTENT
\sethyphenatedurlafter {...} * TEXT
\sethyphenatedurlbefore {...} * TEXT
\sethyphenatedurlnormal {...} * TEXT
\sethyphenationfeatures [...,*...] * NAME reset OPT
\setinitial [...] 1 NAME OPT OPT 2 inherits: \setupinitial
\setinjector [...] 1 NAME 2 NUMMER 3 BEFEHL
\setinteraction [...] * ascuns NAME

<pre> \setinterfacecommand {...} {...} 1 NAME 2 NAME </pre>
<pre> \setinterfaceconstant {...} {...} 1 NAME 2 NAME </pre>
<pre> \setinterfaceelement {...} {...} 1 NAME 2 NAME </pre>
<pre> \setinterfacemessage {...} {...} {...} 1 NAME 2 titlu NAME NUMBER 3 TEXT </pre>
<pre> \setinterfacevariable {...} {...} 1 NAME 2 NAME </pre>
<pre> \setinternalrendering [...] [...] {...} 1 NAME 2 auto embed 3 CONTENT </pre>
<pre> \setitaliccorrection [...] * da nu reset mic mediu mare </pre>
<pre> \setJSreamble {...} {...} 1 NAME 2 CONTENT </pre>
<pre> \setlayer [...] [...]² [...,...³...,...]³ {...}⁴ 1 NAME 2 stanga dreapta par impar 3 inherits: \setuplayer 4 CONTENT </pre>
<pre> \setlayerframed [...] [...,...²...,...]² [...,...³...,...]³ {...}⁴ 1 NAME 2 inherits: \setuplayer 3 inherits: \seteazainconjurat 4 CONTENT </pre>
<pre> \setlayerframed [...] [...,...²...,...]² {...}³ 1 NAME 2 inherits: \setuplayerinherits: \seteazainconjurat 3 CONTENT </pre>
<pre> \setlayertext [...] [...,...²...,...]² [...,...³...,...]³ {...}⁴ 1 NAME 2 inherits: \setuplayer 3 aliniere = inherits: \seteazaalinierea latime = DIMENSION stil = STYLE BEFEHL culoare = COLOR 4 TEXT </pre>
<pre> \setlinefiller [...] * filler NAME </pre>
<pre> \setlineprofile [...] * NAME </pre>

<code>\setlocalalignanchor</code> $\{.^1.\}$ $.^2.$ $.^3.$ $\{.^4.\}$ 1 NAME 2 NUMMER 3 NUMMER 4 r dreapta c m centru
<code>\setlocalanchoring</code>
<code>\setlocalhsize</code> $[.^*.]$ * $[-+]DIMENSION$ OPT
<code>\setlocalmarkanchor</code> $\{.^1.\}$ $.^2.$ $.^3.$ 1 NAME 2 NUMMER 3 NUMMER
<code>\setlocalscript</code> $[.^*.]$ * hangul hanzi nihongo ethiopic thai test NAME
<code>\setlocalshowmakeup</code>
<code>\setlocalsyncanchor</code> $\{.^1.\}$ $.^2.$ $.^3.$ 1 NAME 2 NUMMER 3 NUMMER
<code>\setluatable</code> $\backslash.^1.$ $\{.^2.\}$ 1 CSNAME 2 CONTENT
<code>\setMPlayer</code> $[.^1.]$ $[.^2.]$ $[...^3...]$ $\{.^4.\}$ 1 NAME 2 NAME 3 inherits: \setupplayer 4 CONTENT
<code>\setMPpositiongraphic</code> $\{.^1.\}$ $\{.^2.\}$ $\{...^3...^4...\}$ 1 NAME 2 NAME 3 KEY = VALUE
<code>\setMPpositiongraphicrange</code> $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ $\{...^4...^5...\}$ 1 NAME 2 NAME 3 NAME 4 KEY = VALUE
<code>\setMPtext</code> $\{.^1.\}$ $\{.^2.\}$ 1 NAME 2 TEXT
<code>\setMPvariable</code> $[.^1.]$ $[..^2..]$ 1 NAME 2 KEY = VALUE
<code>\setMPvariables</code> $[.^1.]$ $[...^2...]$ 1 NAME 2 KEY = VALUE
<code>\setmainbodyfont</code>
<code>\setmainlineprofile</code>

$\backslash\text{setmainparbuilder}$ [$\dots$] $\ast$ implicit oneline basic NAME
$\backslash\text{setmarker}$ [$\overset{1}{\dots}$] [$\overset{2}{\dots}$] 1 NAME 2 NUMMER
$\backslash\text{setmarking}$ [$\overset{1}{\dots}$] [$\overset{2}{\dots}$] 1 BESCHRIFTUNG 2 TEXT
$\backslash\text{setmathgroupset}$ [$\dots$] $\ast$ NAME
$\backslash\text{setmathmatrixanchoring}$ [$\dots$] $\ast$ da ambele
$\backslash\text{setmathstyle}$ [$\dots^{\ast}$, $\dots$] $\ast$ display text script scriptscript cramped uncramped normal impachetat mic mare NAME
$\backslash\text{setmeasure}$ [$\overset{1}{\dots}$] [$\overset{2}{\dots}$] 1 NAME 2 DIMENSION
$\backslash\text{setmessagetext}$ [$\overset{1}{\dots}$] [$\overset{2}{\dots}$] 1 NAME 2 NAME NUMMER
$\backslash\text{setmode}$ [$\dots$] $\ast$ NAME
$\backslash\text{setmxscale}$
$\backslash\text{setmxxscale}$
$\backslash\text{setnostrut}$
$\backslash\text{setnote}$ [$\overset{1}{\dots}$] [$\overset{2}{\dots},\overset{2}{\dots}$] [$\overset{3}{\dots}$] 1 NAME 2 REFERENCE 3 TEXT
$\backslash\text{setnotetext}$ [$\overset{1}{\dots}$] [$\overset{2}{\dots},\overset{2}{\dots}$] [$\overset{3}{\dots}$] 1 NAME 2 REFERENCE 3 TEXT
$\backslash\text{setnotetext}$ [$\overset{1}{\dots}$] [$\dots,\dots^{\frac{2}{2}}\dots,\dots$] 1 NAME 2 titlu = TEXT semncarte = TEXT lista = TEXT referinta = REFERENCE referencetext = TEXT
$\backslash\text{setnote}$ [$\overset{1}{\dots}$] [$\dots,\dots^{\frac{2}{2}}\dots,\dots$] 1 NAME 2 titlu = TEXT semncarte = TEXT lista = TEXT referinta = REFERENCE referencetext = TEXT

\setobject {...} {...} \... {...} 1 NAME 2 NAME 3 CSNAME 4 CONTENT
\setoldstyle
\setoverloads [...] * NAME
\setpagelooseness [...] * NUMMER
\setpagelooseness [...,... [*] ...,...] * linii = DIMENSION inalttime = DIMENSION dilatat = DIMENSION shrink = DIMENSION
\setpagereference {...} {..., ² ...} 1 NAME 2 REFERENCE
\setpagestate [...] ¹ [...] ² 1 NAME OPT 2 NAME NUMMER
\setpagestaterealpageno {...} {...} ² 1 NAME 2 NAME NUMMER
\setparagraphfreezing
\setparagraphshape [...] * NAME
\setpenalties \... {...} {...} ³ 1 CSNAME 2 NUMMER 3 NUMMER
\setpercentdimen {...} {...} ² 1 DIMENSION CSNAME 2 DIMENSION NUMMER%
\setperiodkerning [...] * reset NAME
\setposition {...} * NAME
\setpositionbox {...} \... {...} ³ 1 NAME 2 CSNAME 3 CONTENT
\setpositiondata {...} {...} {...} {...} ⁴ 1 NAME 2 DIMENSION 3 DIMENSION 4 DIMENSION

<pre> \setpositiondataplus {...} {...} {...} {...} {...,⁵...} 1 NAME 2 DIMENSION 3 DIMENSION 4 DIMENSION 5 TEXT </pre>
<pre> \setpositiononly {...} * NAME </pre>
<pre> \setpositionplus {...} {...,²...} \... {...} 1 NAME 2 TEXT 3 CSNAME 4 CONTENT </pre>
<pre> \setpositionstrut {...} * NAME </pre>
<pre> \setprofile [...] * niciunul fixat strict halffixed quarterfixed eightsfixed NAME </pre>
<pre> \setrandomseed {...} * NUMMER </pre>
<pre> \setreference [...,¹...] [...,²...,...] 1 REFERENCE 2 KEY = VALUE </pre>
<pre> \setreferencedobject {...} {...} \... {...} 1 NAME 2 NAME 3 CSNAME 4 CONTENT </pre>
<pre> \setregisterentry [...] [...,²...,...] [...,³...,...] 1 NAME 2 eticheta = NAME keys = TEXT PROCESSOR->TEXT entries = TEXT PROCESSOR->TEXT processors = PROCESSOR keys:1 = TEXT keys:2 = TEXT keys:3 = TEXT entries:1 = TEXT entries:2 = TEXT entries:3 = TEXT alternativ = TEXT processors:1 = PROCESSOR processors:2 = PROCESSOR processors:3 = PROCESSOR 3 KEY = VALUE </pre>
<pre> \setreplacements [...] [...] 1 reset NAME 2 NAME </pre>
<pre> \setrigidcolumnbalance ... * CSNAME NUMMER </pre>
<pre> \setrigidcolumnhsize {...} {...} {...} 1 DIMENSION 2 DIMENSION 3 NUMMER </pre>

$\backslash\text{setscaleddirectsymbolicfont}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ 1 DIMENSION 2 NUMMER 3 FONT
$\backslash\text{setscaledstyledsymbolicfont}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ 1 DIMENSION 2 NUMMER 3 FONT
$\backslash\text{setscript}$ $\{.^*.\}$ * hangul hanzi nihongo ethiopic thai test NAME
$\backslash\text{setsecondpasscharacteralign}$
$\backslash\text{setsectionblock}$ $[.^1.]$ $[.^2.\dots]$ 1 NAME OPT 2 semncarte = TEXT
$\backslash\text{setsimplecolumnshsize}$ $[.^*\dots]$ * n = NUMMER latime = DIMENSION distanta = DIMENSION linii = NUMMER
$\backslash\text{setsmallbodyfont}$
$\backslash\text{setsmallcaps}$
$\backslash\text{setstackbox}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ 1 NAME 2 NAME 3 CONTENT
$\backslash\text{setstructurepageregister}$ $[.^1.]$ $[.^2.\dots]$ $[.^3.\dots]$ 1 NAME OPT 2 eticheta = NAME keys = TEXT PROCESSOR->TEXT entries = TEXT PROCESSOR->TEXT processors = PROCESSOR keys:1 = TEXT keys:2 = TEXT keys:3 = TEXT entries:1 = TEXT entries:2 = TEXT entries:3 = TEXT alternativ = TEXT processors:1 = PROCESSOR processors:2 = PROCESSOR processors:3 = PROCESSOR 3 KEY = VALUE
$\backslash\text{setstrut}$
$\backslash\text{setstyledsymbolicfont}$ $\{.^*.\}$ * FONT
$\backslash\text{setsuperiors}$
$\backslash\text{setsystemmode}$ $\{.^*.\}$ * NAME
$\backslash\text{settabular}$

* KEY = VALUE

`\settextcontent` ^[1] ^[2] ^[3] ^[4] ^[5]

```

1  sus antet text subsol subsol
2  text margine bordura
3  stanga centru dreapta
4  data numarpagina BESCHRIFTUNG TEXT BEFEHL
5  data numarpagina BESCHRIFTUNG TEXT BEFEHL

```

1	NAME
2	NAME
3	CSNAME
4	CONTENT

1	NAME
2	NAME
3	CSNAME
4	CONTENT

1	NAME
2	NAME
3	CSNAME
4	CONTENT

```

1  NAME
2  TEXT

```

* NAME

* NAME

1	NAME
2	CONTENT

1	NAME
2	CONTENT

```

1  NAME
2  NAME
3  CSNAME
4  CONTENT

```

\setupadaptive [...¹,...] [...²,...]

1 NAME OPT
2 setups = NAME
foregroundstyle = STYLE BEFEHL
foregroundcolor = COLOR
strut = da nu
metoda = NUMMER
culoare = COLOR
alternativ = NAME
grosimerigla = DIMENSION
margine = DIMENSION
dilatat = DIMENSION
shrink = DIMENSION
locatie = stanga dreapta

\setupalignpass [...]

* niciunul granular decent quality NAME

\setupalternativestyles [...^{*},...]

* metoda = normal auto

\setupattachment [...¹,...] [...²,...]

1 NAME OPT
2 titlu = TEXT
subtitlu = TEXT
autor = TEXT
fisier = FILE
nume = NAME
buffer = BUFFER
type = NAME
stare = start stop
metoda = normal ascuns
simbol = Graph Paperclip Pushpin Default
latime = ajustat DIMENSION
inaltime = ajustat DIMENSION
inaltime = ajustat DIMENSION
culoare = COLOR
textlayer = NAME
locatie = bordurastanga borduradreapta inmarginestanga marginedreapta text inalt niciunul
distanta = DIMENSION

\setupattachments [...¹,...] [...²,...]

1 NAME OPT
2 inherits: \setupattachment

\setupbackend [...^{*},...]

* export = da FILE
xhtml = FILE
fisier = FILE
intent = Coated_FOGRA39_(ISO_12647-2:2004) GRACoL2006_Coated1v2.icc ISO_Coated_v2_300%(ECI) ISO_Coated_v2_(ECI)
ISOnewspaper26v4 ISOnewspaper26v4_gr ISO_Uncoated ISO_Uncoated_Yellowish ISO_Web_Coated Japan_Color_2001_Coated
Japan_Color_2002_Newspaper Japan_Web_Coated_(Ad) SNAP_2007 SWOP2006_Coated3v2.icc SWOP2006_Coated5v2.icc
Uncoated_FOGRA29_(ISO_12647-2:2004) Web_Coated_FOGRA28_(ISO_12647-2:2004) PSR_LWC_PLUS_V2_PT PSR_LWC_STD_V2_PT
PSR_SC_PLUS_V2_PT PSR_SC_STD_V2_PT PSRgravureMF
spatiu = da nu
hyphen = da nu
xmpfile = FILE
format = version implicit PDF/X-1a:2001 PDF/X-1a:2003 PDF/X-3:2002 PDF/X-3:2003 PDF/X-4 PDF/X-4p PDF/X-5g
PDF/X-5pg PDF/X-5n PDF/A-1a:2005 PDF/A-1b:2005 PDF/A-2a PDF/A-3a PDF/UA-1
nivel = NUMMER
optiune = totdeauna niciodata
profile = FILE

\setupbalancing [...¹,...] [...²,...]

1 NAME OPT
2 distanta = DIMENSION
inaltime = DIMENSION
inainte = BEFEHL
dupa = BEFEHL
setups = NAME
aliniere = inherits: \seteazaalinierea

\setupbar [...,¹...] [...,²...]

```

1 NAME OPT
2 culoare = COLOR
  continua = da nu tot totdeauna
  gol = da nu
  unitate = ex em pt in cm mm sp bp pc dd cc nc
  order = primplan fundal
  grosimerigla = DIMENSION
  metoda = NUMMER
  offset = NUMMER DIMENSION
  inaltime = DIMENSION
  inaltime = DIMENSION
  dy = NUMMER
  max = NUMMER
  foregroundstyle = STYLE BEFEHL
  foregroundcolor = COLOR
  mp = NAME
  stanga = TEXT
  dreapta = TEXT
  repeta = da nu
  text = TEXT

```

\setupbars [...,¹...] [...,²...]

```

1 NAME OPT
2 inherits: \setupbar

```

\setupbleeding {...,¹...} {...,²...}

```

1 NAME OPT
2 define = da nu
  latime = DIMENSION
  inaltime = DIMENSION
  offset = DIMENSION
  hoffset = DIMENSION
  voffset = DIMENSION
  locatie = t b l r bl lb br rb tl lt tr rt
  dilatat = da nu
  pagina = da nu

```

\setupbookmark [...,^{*}...]

```

* fortat = da nu
  numar = da nu
  numberseparatorset = NAME
  numberconversionset = NAME
  numberstarter = BEFEHL
  numberstopper = BEFEHL
  numbersegments = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:* ABSCHNITT:tot
  curent
  sectionblock = da nu

```

\setupboxanchor [...,^{*}...]

```

* xoffset = DIMENSION
  yoffset = DIMENSION
  target = linie inaltime adancime stanga left,height left,top left,depth left,bottom dreapta right,height
    right,top right,depth right,bottom centru middle,height middle,top middle,depth middle,bottom middle,left
    middle,right
  source = linie inaltime adancime stanga left,height left,top left,depth left,bottom dreapta right,height
    right,top right,depth right,bottom centru middle,height middle,top middle,depth middle,bottom middle,left
    middle,right

```

```

\setupboxanchorcontent  [...,1...]  [...,2...]
1  NAME
2  xoffset      = DIMENSION
   yoffset      = DIMENSION
   colt         = linie inaltime adancime stanga left,height left,top left,depth left,bottom dreapta right,height
                  right,top right,depth right,bottom centru middle,height middle,top middle,depth middle,bottom
                  middle,left middle,right
   locatie      = linie inaltime adancime stanga left,height left,top left,depth left,bottom dreapta right,height
                  right,top right,depth right,bottom centru middle,height middle,top middle,depth middle,bottom
                  middle,left middle,right
   distanta     = DIMENSION
   dash         = NUMMER
   sageata      = da nu reverse ambele
   alternativ     = stanga centru dreapta sus subsol
   text         = TEXT
   grosimerigla = DIMENSION
   culoarerigla = COLOR
   mp          = NAME
   pagina       = da nu

```

```

\setupboxexport  [...,*...]
*  buffer = NAME
   fisier  = FILE

```

```

\setupbtx  [...]1  [...,2...]
1  NAME
2  specification = implicit apa aps NAME
   dataset      = implicit NAME
   comanda       = \...#1
   stanga        = BEFEHL
   dreapta       = BEFEHL
   authorconversion = normal normalshort normalinverted invertedshort short
   etallimit     = NUMMER
   etaldisplay   = NUMMER
   etaloption    = ultim
   stopper       = initials
   interactiune  = start stop numar text pagina tot
   alternativ     = implicit category entry short pagina num textnum an index tag keywords autor authoryears
                  authornum authoryear
   sorttype      = normal reverse
   compress      = da nu
   implicit      = implicit NAME
   stil          = STYLE BEFEHL
   culoare       = COLOR

```

```

\setupbtxdataset  [...,1...]  [...,2...]
1  NAME
2  language = SPRACHE

```

```

\setupbtxlist  [...]1  [...,2...]
1  NAME
2  inherits: \seteazalista

```

```

\setupbtxregister  [...,1...]  [...,2...]
1  NAME
2  stare          = start stop
   dataset        = NAME
   field          = keyword range numarpagina autor
   register       = NAME
   metoda        = once
   alternativ      = normalshort invertedshort
   stil           = STYLE BEFEHL
   culoare        = COLOR

```

```

\setupbtxrendering [...1,...] [...2,...]
1 NAME OPT
2 staretext = start stop
  pagestate = start stop
  separator = BEFEHL
  criteriu = precedent cite aici tot niciunul
  filter = TEXT
  specification = NAME
  titlu = TEXT
  inainte = BEFEHL
  dupa = BEFEHL
  dataset = NAME
  metoda = dataset eticheta fortat local global niciunul
  sorttype = short dataset lista referinta folosit implicit cite index
  repeta = da nu
  group = NAME
  numerotare = da nu num index tag short pagina
  fisier = FILE

```

```

\setupbtx [...]
* NAME

```

```

\setupbutton [...1,...] [...2,...]
1 NAME OPT
2 stare = start stop
  aceeasipagina = da nu gol niciunul normal implicit
  stil = STYLE BEFEHL
  culoare = COLOR
  culoarecontrast = COLOR
  alternativ = ascuns
  inherits: \seteazainconjurat

```

```

\setupcharacteralign [...*,...]
* latimestanga = DIMENSION
  marginedreapta = DIMENSION
  leftsample = TEXT
  rightsample = TEXT
  character = TEXT number->TEXT text->TEXT

```

```

\setupcharacterkerning [...1,...] [...2,...]
1 NAME OPT
2 factor = max NUMMER
  latime = DIMENSION
  features = NAME
  stil = STYLE BEFEHL
  culoare = COLOR

```

```

\setupcharacterspacing [...1] [...2] [...3,...]
1 NAME OPT
2 NUMMER
3 stanga = NUMMER
  dreapta = NUMMER
  alternativ = 0 1
  language = SPRACHE

```

```

\setupchemical [...1,...] [...2,...,...]
1 NAME OPT
2 strut = da nu auto cap ajustat linie implicit CHARACTER
latime = ajustat niciunul NUMBER
inaltime = ajustat niciunul NUMBER
stanga = ajustat niciunul NUMBER
dreapta = ajustat niciunul NUMBER
sus = ajustat niciunul NUMBER
jos = ajustat niciunul NUMBER
scala = mic mediu mare normal NUMBER
rotatie = NUMBER
symalinie = auto
axa = on dezactivat
culoareframe = COLOR
grosimerigla = DIMENSION
offset = DIMENSION
unitate = DIMENSION
factor = NUMBER
frame = on dezactivat
culoarerigla = COLOR
fonttext = inherits: \seteazafonttext
dimensiune = mic mediu mare
stil = STYLE BEFEHL
culoare = COLOR

```

```

\setupchemicalframed [...1,...] [...2,...,...]
1 NAME OPT
2 inherits: \seteazainconjurat

```

```

\setupchemistry [...1,...] [...2,...,...]
1 NAME OPT OPT
2 spatiere = inherits: \setupmathspacing
scala = NUMBER
filter = da nu

```

```

\setupcollector [...1,...] [...2,...,...]
1 NAME OPT
2 rotatie = stanga dreapta intern extern NUMBER
colt = stanga centru dreapta sus subsol
x = DIMENSION
y = DIMENSION
hoffset = DIMENSION
voffset = DIMENSION
locatie = stanga centru dreapta sus subsol linie l c r m t b g
stare = start stop

```

```

\setupcolumnset [...1,...] [...2,...,...]
1 NAME OPT
2 linii = NUMBER
n = NUMBER
nstanga = NUMBER
ndreapta = NUMBER
stare = start stop
distanta = DIMENSION
latime = DIMENSION
pagina = inherits: \pagina
latimemaxima = DIMENSION
inaltimemaxima = DIMENSION
limit = NUMBER
language = SPRACHE
region = NAME
directie = normal reverse
locatie = stanga dreapta
alinie = inherits: \seteazaalinie
inherits: \seteazainconjurat

```

\setupcolumnsetarea [...¹,...] [...²,...]

1 NAME OPT
2 type = sheet
sheet = NUMBER
stare = repetat stop
x = NUMBER
y = NUMBER
nx = NUMBER
ny = NUMBER
text = TEXT
latime = DIMENSION
inaltime = DIMENSION
clipoffset = DIMENSION
offsetstanga = DIMENSION
offsetdreapta = DIMENSION
stil = STYLE BEFEHL
culoare = COLOR
inherits: \seteazainconjurat

\setupcolumnsetareatext [...¹] [...²]

1 NAME
2 TEXT

\setupcolumnsetlines [...¹] [...²] [...³] [...⁴]

1 NAME
2 NUMMER
3 NUMMER
4 NUMMER

\setupcolumnsetspan [...¹,...] [...²,...]

1 NAME OPT
2 n = NUMBER
inainte = BEFEHL
dupa = BEFEHL
stil = STYLE BEFEHL
culoare = COLOR
inherits: \seteazainconjurat

\setupcolumnsetstart [...¹] [...²] [...³] [...⁴]

1 NAME
2 NUMMER
3 NUMMER
4 NUMMER

\setupcombination [...¹,...] [...²,...]

1 NAME OPT
2 nx = NUMBER
ny = NUMBER
latime = ajustat DIMENSION
inaltime = ajustat DIMENSION
locatie = stanga centru dreapta sus subsol
distanta = DIMENSION
alternativ = eticheta text
aliniere = inherits: \seteazaalinierea
continua = da nu
inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL
stil = STYLE BEFEHL
culoare = COLOR
metoda = formula
strut = da nu

\setareCOMANDA [...¹,...] [...²,...]

1 NAME OPT
2 KEY = VALUE

\setupcomparingtext [...¹,...] [...²,...]

1 NAME OPT
2 metoda = caracter cuvant
culoare = COLOR

```

\setupcounter    [...,1...]    [...,2...,...]
1  NAME          OPT
2  start          = NUMBER
   numar          = NUMBER
   counter        = NAME
   metoda         = pagina
   stare          = start stop
   mod            = bypagina byblock bytext byantet byABSCHNITT
   prefix         = da nu
   prefixseparatorset = NAME
   prefixconversion = NAME
   prefixconversionset = NAME
   prefixstarter  = BEFEHL PROCESSOR->BEFEHL
   prefixstopper  = BEFEHL PROCESSOR->BEFEHL
   prefixset      = NAME
   prefixsegments = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:* ABSCHNITT:tot
   curent
   numberorder    = reverse
   numberseparatorset = NAME
   numberconversion = NAME
   numberconversionset = NAME
   numberstarter  = BEFEHL PROCESSOR->BEFEHL
   numberstopper  = BEFEHL PROCESSOR->BEFEHL
   numbersegments = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:tot
   type          = primul precedent urmatorul ultim numar
   criteriu       = strict positiv tot
   prefixconnector = BEFEHL PROCESSOR->BEFEHL

```

```

\setupcurrentCOMANDA    [...,*...,...]
*  KEY = VALUE

```

```

\setupdataset    [...,1...]    [...,2...,...]
1  NAME          OPT
2  intarziere    = da nu

```

```

\setupdelimitedtext    [...,1...]    [...,2...,...]
1  NAME NAME:NUMBER    OPT
2  inainte             = BEFEHL
   dupa                = BEFEHL
   language            = local global SPRACHE
   metoda              = font text paragraf
   repeta              = da nu
   locatie             = text paragraf margine
   stanga              = BEFEHL
   mijloc              = BEFEHL
   dreapta             = BEFEHL
   nextleft            = BEFEHL
   nextright           = BEFEHL
   spatiuinainte       = inherits: \blanc
   spatiudupa          = inherits: \blanc
   marginestanga       = da nu standard DIMENSION
   marginedreapta      = da nu standard DIMENSION
   aliniat             = inherits: \seteazaaliniat
   aliniaturmator      = da nu auto
   stil                = STYLE BEFEHL
   culoare             = COLOR
   stilsimbol          = STYLE BEFEHL
   culoaresimbol       = COLOR
   aliniere            =

```

\setupdescription [...¹,...] [...²,...]

1 NAME OPT
 2 titlu = da nu
 define = da nu
 nivel = NUMMER
 text = TEXT
 headcommand = \...#1
 inainte = BEFEHL
 dupa = BEFEHL
 intre = BEFEHL
 alternativ = stanga dreapta inmargin instanga indreapta margine marginestanga marginedreapta innermargin
 outermargin serried suspendat sus gol comanda NAME
 aliniere = inherits: \seteazaalinierea
 headalign = inherits: \seteazaalinierea
 aliniat = inherits: \seteazaaliniat
 display = da nu
 aliniaturmator = da nu auto
 latime = ajustat broad linie DIMENSION
 distanta = niciunul DIMENSION
 dilatat = NUMMER
 shrink = NUMMER
 suspenda = ajustat broad niciunul margine NUMMER
 closesymbol = BEFEHL
 closecommand = \...#1
 expansiune = da nu xml
 referenceprefix = + - TEXT
 exemplu = TEXT
 margine = da nu standard DIMENSION
 stil = STYLE BEFEHL
 culoare = COLOR
 stiltitlu = STYLE BEFEHL
 culoaretitlu = COLOR
 alinieretitlu = da nu
 headindenting = da nu
 intarziere = text

\setupdirections [...^{*},...]

* bidi = on dezactivat local global
 metoda = unu doi implicit
 fences = da nu
 break = ambele inainte

\setupdocument [...¹,...] [...²,...]

1 NAME OPT
 2 inainte = BEFEHL
 dupa = BEFEHL
 metadata:author = TEXT
 metadata:title = TEXT
 metadata:subject = TEXT
 metadata:keywords = TEXT
 KEY = VALUE

\setupeffect [...¹,...] [...²,...]

1 NAME OPT
 2 metoda = niciunul comanda
 dilatat = NUMMER
 grosimerigla = DIMENSION
 alternativ = normal intern extern ambele ascuns clip dilatat

```

\setupenumeration    [...,1...]    [...,2≡...,...]
1  NAME              OPT
2  titlu              = da nu
   numar              = da nu
   comandanumar       = \...#1
   stilnumar          = STYLE BEFEHL
   culoarenumar       = COLOR
   distantatitlu      = DIMENSION
   stiltitlu          = STYLE BEFEHL
   culoaretitlu       = COLOR
   titlecommand       = \...#1
   titleleft          = BEFEHL
   titleright         = BEFEHL
   stanga             = BEFEHL
   dreapta            = BEFEHL
   simbol             = BEFEHL
   starter            = BEFEHL
   stopper            = BEFEHL
   cuplare            = NAME
   counter            = NAME
   define             = da nu
   eticheta           = NAME
   nivel              = NUMMER
   text               = TEXT
   headcommand        = \...#1
   inainte            = BEFEHL
   dupa               = BEFEHL
   intre              = BEFEHL
   alternativ          = stanga dreapta inmargin instanga indreapta margine marginestanga marginedreapta innermargin
                       outermargin serried suspendat sus gol comanda NAME

   aliniere           = inherits: \seteazaalinierea
   headalign          = inherits: \seteazaalinierea
   aliniat            = inherits: \seteazaaliniat
   display            = da nu
   aliniaturmator     = da nu auto
   latime             = ajustat broad linie DIMENSION
   distanta           = niciunul DIMENSION
   dilatata           = NUMMER
   shrink             = NUMMER
   suspenda           = ajustat broad niciunul margine NUMMER
   closesymbol        = BEFEHL
   closecommand       = \...#1
   expansiune         = da nu xml
   referenceprefix    = + - TEXT
   exemplu            = TEXT
   margine            = da nu standard DIMENSION
   stil               = STYLE BEFEHL
   culoare            = COLOR
   stiltitlu          = STYLE BEFEHL
   culoaretitlu       = COLOR
   alinieretitlu      = da nu
   headindenting      = da nu
   intarziere         = text
   inherits: \setupcounter

```

```

\setupenv    [...,*...]
*  set       = BEFEHL
   reset     = BEFEHL
   KEY       = VALUE

```

```

\setupexpansion    [...,1...]    [...,2≡...,...]
1  NAME              OPT
2  pas              = NUMMER
   dilatata        = NUMMER
   shrink          = NUMMER

```

\setupexport [...,*=...]

```
* aliniere      = flushleft centru flushright normal
fonttext       = DIMENSION
latime         = DIMENSION
titlu          = TEXT
subtitlu       = TEXT
autor          = TEXT
alternativ     = html div
properties     = da nu
hyphen         = da nu
cssfile        = FILE
primapagina    = FILE
ultimapagina   = FILE
```

\setupexternalfigure [...¹,...] [...²,=...]

```
1 NAME
2 latime        = DIMENSION
inalttime      = DIMENSION
eticheta       = NAME
pagina         = NUMMER
obiect         = da nu
prefix         = TEXT
metoda         = pdf mps jpg png jp2 jbig svg eps gif tif mov buffer tex cld auto
controale     = da nu
previzualizare = da nu
mask           = niciunul NAME
rezolutie      = NUMMER
culoare        = COLOR
cmyk           = da nu auto
gray           = da nu auto
arguments      = TEXT
repetat        = da nu
factor         = ajustat broad max auto implicit
hfactor        = ajustat broad max auto implicit
factorw        = ajustat broad max auto implicit
latimemaxima   = DIMENSION
inaltimemaxima = DIMENSION
equalwidth     = DIMENSION
equalheight    = DIMENSION
scala          = NUMMER
xscala         = NUMMER
yscala         = NUMMER
s              = NUMMER
sx             = NUMMER
sy             = NUMMER
linii          = NUMMER
locatie        = local global implicit
director       = PATH
optiune        = test incadrat gol
foregroundcolor = COLOR
reset          = da nu
fundal         = culoare primplan NAME
frame          = on dezactivat
culoarefundal  = COLOR
xmax           = NUMMER
ymax           = NUMMER
frames         = on dezactivat
interactiune   = da tot niciunul referinta layer semncarte
fonttext       = DIMENSION
comment        = BEFEHL TEXT
dimensiune     = niciunul media crop trim art
cache          = PATH
resources      = PATH
display        = FILE
conversie      = TEXT
order          = LISTE
crossreference  = da nu NUMMER
transform       = auto NUMMER
userpassword   = TEXT
ownerpassword  = TEXT
orientation    = NUMMER
compact        = da nu merge tikz NAME
metadata       = da nu pagina document
defaultwidth   = DIMENSION
defaultheight  = DIMENSION
range          = niciunul NAME
```

```

1  NAME                                OPT
2  intre                               = BEFEHL
   pagina                             = inherits: \pagina
   spaceinbetween                     = inherits: \blanc
   stil                               = STYLE BEFEHL
   culoare                             = COLOR
   latime                             = ajustat incadrat DIMENSION
   inherits: \seteazainconjurat

```

```

1  NAME                                OPT
2  category = NAME
   inherits: \setupfieldcategory

```

1	NAME		OPT
2	start	=	NUMMER
	stil	=	STYLE BEFEHL
	culoare	=	COLOR
	type	=	radio sub text linie push check signature
	values	=	TEXT
	implicit	=	TEXT
	culoareframecamp	=	COLOR
	culoarefundalcamp	=	COLOR
	latime	=	DIMENSION
	inaltime	=	DIMENSION
	inaltime	=	DIMENSION
	aliniere	=	stanga centru dreapta flushleft center flushright
	n	=	NUMMER
	simbol	=	NAME
	fieldlayer	=	NAME
	optiune	=	readonly obligatoriu protejat sortat nedisponibil nocheck fixat fisier ascuns tiparibil auto
	clickintru	=	REFERENCE
	clickies	=	REFERENCE
	regiuneintrare	=	REFERENCE
	regiuneiesire	=	REFERENCE
	dupatasta	=	REFERENCE
	format	=	REFERENCE
	verifica	=	REFERENCE
	calculeaza	=	REFERENCE
	focusin	=	REFERENCE
	focusout	=	REFERENCE
	openpage	=	REFERENCE
	closepage	=	REFERENCE

```
1  NAME OPT
2  inherits: \seteazainconjuratinherits: \setupfieldcategory
```

```
1 NAME OPT
2 inherits: \seteazainconjurat
```

```

1  NAME                                OPT
2  inainte      = BEFEHL
   dupa         = BEFEHL
   intre        = BEFEHL
   distanta     = DIMENSION
   alternativ    = reset eticheta incadrat orizontal vertical
   inherits:    \seteazainconjurat

```

1	NAME	OPT
2	marginestanga	= DIMENSION
	marginedreapta	= DIMENSION
	stanga	= BEFEHL
	dreapta	= BEFEHL
	alternativ	= simbol dilatat rigla spatii
	metoda	= local global centru broad
	latime	= DIMENSION
	inaltime	= DIMENSION
	inaltime	= DIMENSION
	offset	= DIMENSION
	distanța	= DIMENSION
	alinieri	= stanga dreapta centru flushleft flushright intern extern
	simbol	= BEFEHL
	stil	= STYLE BEFEHL
	culoare	= COLOR

```

1  NAME                                OPT
2  n      =  NUMMER
    alternativ = implicit linie cuvanta
    stil     = STYLE BEFEHL
    culoare  = COLOR

```

```

1  NAME                                OPT
2  pagestate = start stop
   comanda  = \...#1
   margine  = pagina
   scala    = NUMMER
   hartie   = auto implicit NAME
   instance = metafun minifun extrafun lessfun scaledfun doublefun binaryfun decimalfun positfun mprun metapost
              nofun scaledpost doublepost binarypost decimalpost simplefun
   stacking = TEXT
   eticheta = TEXT
   inherits: \seteazainconjurat

```

```
1 NAME OP
2 inherits: \seteazainconjurat
```

```

1  NAME
2  vector  =  NAME
   factor  =  NUMMER
   dilatat =  NUMMER
   shrink  =  NUMMER
   pas     =  NUMMER

```

```

1  NAME
2  vector  =  NAME
   factor  =  NUMBER
   stanga  =  NUMBER
   dreapta =  NUMBER

```

```
* language = nu auto
  serif    = FONT
  sans     = FONT
  mono     = FONT
```

```

1 NAME OPT
2 goodies = FILE
  solution = NAME
  less = NAME
  more = NAME
  metoda = preroll split normal reverse aleator
  criteriu = NUMBER

```

<pre> \setupformula [...¹,...] [...²...,...] 1 NAME OPT 2 inherits: \seteazaformule </pre>
<pre> \setupformulaframed [...¹,...] [...²...,...] 1 NAME OPT 2 inherits: \seteazainconjurat </pre>
<pre> \setupframedcontent [...¹,...] [...²...,...] 1 NAME 2 stanga = BEFEHL dreapta = BEFEHL offsetstanga = DIMENSION offsetdreapta = DIMENSION offsetsus = DIMENSION offsetjos = DIMENSION corectielinie = da nu inherits: \seteazainconjurat </pre>
<pre> \setupframedtable [...¹.] [...²...,...] 1 NAME OPT 2 inainte = BEFEHL dupa = BEFEHL intre = BEFEHL distanta = DIMENSION inherits: \seteazainconjurat </pre>
<pre> \setupframedtablecolumn [...¹.] [...².] [...³...,...] 1 NAME OPT 2 NUMMER fiecare 3 inherits: \seteazainconjurat </pre>
<pre> \setupframedtablerow [...¹.] [...².] [...³...,...] 1 NAME OPT 2 NUMMER fiecare 3 inherits: \seteazainconjurat </pre>
<pre> \setupframedtext [...¹,...] [...²...,...] 1 NAME OPT 2 stanga = BEFEHL dreapta = BEFEHL intern = BEFEHL locatie = stanga dreapta centru niciunul corectieadancime = on dezactivat fonttext = inherits: \seteazafonttext aliniat = inherits: \seteazaaliniat stil = STYLE BEFEHL culoare = COLOR inherits: \seteazainconjuratinherits: \setupplacement </pre>
<pre> \setupglobalreferenceprefix [...[*].] * + - TEXT </pre>
<pre> \setuphanging [...[*]...,...] * distanta = DIMENSION n = NUMMER offsetsus = DIMENSION offsetjos = DIMENSION locatie = stanga dreapta </pre>
<pre> \setupheadalternative [...¹,...] [...²...,...] 1 NAME OPT 2 alternativ = orizontal vertical undeva renderingsetup = NAME </pre>
<pre> \setuphelp [...¹,...] [...²...,...] 1 NAME OPT 2 inherits: \seteazainconjurat </pre>

`\setuphigh` [...,¹...] [...,²...,...]

1 NAME OPT
2 distanta = DIMENSION
 up = DIMENSION
 stil = STYLE BEFEHL
 culoare = COLOR

`\setuphighlight` [...,¹...] [...,²...,...]

1 NAME OPT
2 comanda = da nu
 language = SPRACHE
 stil = STYLE BEFEHL
 culoare = COLOR

`\setuphorizontalbox` [...,¹...] [...,²...,...]

1 NAME OPT OPT
2 latime = max local DIMENSION
 dilatata = DIMENSION
 directie = normal reverse lefttoright righttoleft
 xoffset = DIMENSION
 yoffset = DIMENSION
 stil = STYLE BEFEHL
 culoare = COLOR
 stanga = BEFEHL
 dreapta = BEFEHL
 strut = da nu

`\setuphyphenation` [...,^{*}...,...]

* metoda = original tex implicit hyphenate expanded traditional niciunul
 hyphens = da nu

`\setupindentedtext` [...,¹...] [...,²...,...]

1 NAME OPT
2 inainte = BEFEHL
 dupa = BEFEHL
 distanta = DIMENSION
 exemplu = TEXT
 text = TEXT
 latime = ajustat broad DIMENSION
 separator = BEFEHL
 stil = STYLE BEFEHL
 culoare = COLOR
 stiltitlu = STYLE BEFEHL
 culoaretitlu = COLOR

`\setupinitial` [...,¹...] [...,²...,...]

1 NAME OPT
2 n = NUMBER
 m = NUMBER
 inainte = BEFEHL
 distanta = DIMENSION
 hoffset = DIMENSION
 voffset = linie DIMENSION
 stil = STYLE BEFEHL
 culoare = COLOR
 font = FONT
 text = TEXT
 locatie = margine text
 metoda = primul ultim auto niciunul
 continua = da nu

`\setupinsertion` [...,¹...] [...,²...,...]

1 NAME OPT
2 locatie = pagina text coloane firstcolumn lastcolumn
 anchoring = auto

`\setupitaliccorrection` [...]

* inherits: \setitaliccorrection

```

\setupitemgroup  [...1]  [...,2...]  [...,3...]  [...,4...,...]
1  NAME
2  fiecare NUMMER
3  intro nointro aleator continuu impachetat autointro broad text inainte dupa faraalb margine inmargine lamargine
   intext headintext larg ajustat nofit paragraf unit notjoinedup serried stopper nostopper despachetat repetat
   norepeat reverse coloane overlay unu doi trei patru cinci six seven eight nine standard NUMMER*broad NUMMER*serried
   orizontal NAME
4  inainte = BEFEHL
   dupa = BEFEHL
   intre = BEFEHL
   inaintetitlu = BEFEHL
   dupatitlu = BEFEHL
   textstanga = BEFEHL
   textdreapta = BEFEHL
   stanga = BEFEHL
   dreapta = BEFEHL
   factor = NUMMER
   pas = DIMENSION
   latime = DIMENSION
   distanta = DIMENSION
   margine = da nu standard DIMENSION
   marginestanga = da nu standard DIMENSION
   marginedreapta = da nu standard DIMENSION
   distantamarginestanga = da nu standard DIMENSION
   distantamarginedreapta = da nu standard DIMENSION
   aliniere = inherits: \seteazaalinierea
   aliniat = inherits: \seteazaaliniat
   start = NUMMER
   symaliniere = stanga centru dreapta flushleft center flushright
   simbol = NAME
   n = NUMMER
   aliniaturmator = da nu auto
   intern = BEFEHL
   comanda = CSNAME
   elemente = NUMMER
   latimemaxima = DIMENSION
   itemalign = stanga dreapta centru flushleft flushright intern extern
   alignsymbol = da nu
   textdistance = mic mediu mare niciunul spatiu DIMENSION
   separatortext = BEFEHL
   lasttextseparator = BEFEHL
   punestopper = da nu display inline
   stil = STYLE BEFEHL
   culoare = COLOR
   stiltitlu = STYLE BEFEHL
   culoaretitlu = COLOR
   stilmarcaj = STYLE BEFEHL
   culoaremarcaj = COLOR
   stilsimbol = STYLE BEFEHL
   culoaresimbol = COLOR
   grid = inherits: \definegridsnapping
   packcriterium = NUMMER
   distantacoloane = DIMENSION
   inherits: \setupcounter

```

```

\setupitemgroup [...,1...] [...,2...,...]
1 NAME NAME:NUMBER OPT
2 inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL
inaintetitlu = BEFEHL
dupatitlu = BEFEHL
textstanga = BEFEHL
textdreapta = BEFEHL
stanga = BEFEHL
dreapta = BEFEHL
factor = NUMMER
pas = DIMENSION
latime = DIMENSION
distanta = DIMENSION
optiune = intro aleator continuu impachetat autointro broad text inainte dupa faraalb margine
inmargine lamargine intext headintext larg ajustat nofit paragraf unit notjoinedup
serried stopper despachetat repetat norepeat reverse coloane overlay unu doi trei patru
cinci six seven eight nine standard NUMMER*broad NUMMER*serried orizontal NAME

margine = da nu standard DIMENSION
marginestanga = da nu standard DIMENSION
marginedreapta = da nu standard DIMENSION
distantamarginestanga = da nu standard DIMENSION
distantamarginedreapta = da nu standard DIMENSION
alinieri = inherits: \seteazaaliniera
aliniat = inherits: \seteazaaliniat
start = NUMMER
symalinieri = stanga centru dreapta flushleft flushright center flushright
simbol = NAME
n = NUMMER
aliniaturmator = da nu auto
intern = BEFEHL
comanda = CSNAME
elemente = NUMMER
latimemaxima = DIMENSION
itemalign = stanga dreapta centru flushleft flushright intern extern
alignsymbol = da nu
textdistance = mic mediu mare niciunul spatiu DIMENSION
separatortext = BEFEHL
lasttextseparator = BEFEHL
punestopper = da nu display inline
stil = STYLE BEFEHL
culoare = COLOR
stilititlu = STYLE BEFEHL
culoaretitlu = COLOR
stilmarcaj = STYLE BEFEHL
culoaremarcaj = COLOR
stilsimbol = STYLE BEFEHL
culoaresimbol = COLOR
grid = inherits: \definegridsnapping
packcriterium = NUMMER
distantacoloane = DIMENSION
inherits: \setupcounter

```

```

\setareITEMGROUP [...,1...] [...,2...] [...,3...,...]
1  fiecare NUMMER OPT OPT OPT
2  intro nointro aleator continuu impachetat autointro broad text inainte dupa faraalb margine inmargine lamargine
   intext headintext larg ajustat nofit paragraf unit notjoinedup serried stopper nostopper despachetat repetat
   norepeat reverse coloane overlay unu doi trei patru cinci six seven eight nine standard NUMMER*broad NUMMER*serried
   orizontal NAME
3  inainte = BEFEHL
   dupa = BEFEHL
   intre = BEFEHL
   inaintetitlu = BEFEHL
   dupatitlu = BEFEHL
   textstanga = BEFEHL
   textdreapta = BEFEHL
   stanga = BEFEHL
   dreapta = BEFEHL
   factor = NUMMER
   pas = DIMENSION
   latime = DIMENSION
   distanta = DIMENSION
   margine = da nu standard DIMENSION
   marginestanga = da nu standard DIMENSION
   marginedreapta = da nu standard DIMENSION
   distantamarginestanga = da nu standard DIMENSION
   distantamarginedreapta = da nu standard DIMENSION
   aliniere = inherits: \seteazaalinierea
   aliniat = inherits: \seteazaaliniat
   start = NUMMER
   symaliniere = stanga centru dreapta flushleft center flushright
   simbol = NAME
   n = NUMMER
   aliniaturmator = da nu auto
   intern = BEFEHL
   comanda = CSNAME
   elemente = NUMMER
   latimemaxima = DIMENSION
   itemalign = stanga dreapta centru flushleft flushright intern extern
   alignsymbol = da nu
   textdistance = mic mediu mare niciunul spatiu DIMENSION
   separator text = BEFEHL
   lasttextseparator = BEFEHL
   punestopper = da nu display inline
   stil = STYLE BEFEHL
   culoare = COLOR
   stilititlu = STYLE BEFEHL
   culoaretitlu = COLOR
   stilmarcaj = STYLE BEFEHL
   culoaremarcaj = COLOR
   stilsimbol = STYLE BEFEHL
   culoaresimbol = COLOR
   grid = inherits: \definegridsnapping
   packcriterium = NUMMER
   distantacoloane = DIMENSION
   inherits: \setupcounter
instances: itemize

```

```

\setareitemize [...] [...] [...]
1  fiecare NUMMER OPT OPT OPT
2  intro nointro aleator continuu impachetat autointro broad text inainte dupa faraalb margine inmargin lamargine
   intext headintext larg ajustat nofit paragraf unit notjoinedup serried stopper nostopper despachetat repetat
   norepeat reverse coloane overlay unu doi trei patru cinci six seven eight nine standard NUMMER*broad NUMMER*serried
   orizontal NAME
3  inainte = BEFEHL
   dupa = BEFEHL
   intre = BEFEHL
   inaintetitlu = BEFEHL
   dupatitlu = BEFEHL
   textstanga = BEFEHL
   textdreapta = BEFEHL
   stanga = BEFEHL
   dreapta = BEFEHL
   factor = NUMMER
   pas = DIMENSION
   latime = DIMENSION
   distanta = DIMENSION
   margine = da nu standard DIMENSION
   marginestanga = da nu standard DIMENSION
   marginedreapta = da nu standard DIMENSION
   distantamarginestanga = da nu standard DIMENSION
   distantamarginedreapta = da nu standard DIMENSION
   aliniere = inherits: \seteazaalinierea
   aliniat = inherits: \seteazaaliniat
   start = NUMMER
   symaliniere = stanga centru dreapta flushleft center flushright
   simbol = NAME
   n = NUMMER
   aliniaturmator = da nu auto
   intern = BEFEHL
   comanda = CSNAME
   elemente = NUMMER
   latimemaxima = DIMENSION
   itemalign = stanga dreapta centru flushleft flushright intern extern
   alignsymbol = da nu
   textdistance = mic mediu mare niciunul spatiu DIMENSION
   separator text = BEFEHL
   lasttextseparator = BEFEHL
   punestopper = da nu display inline
   stil = STYLE BEFEHL
   culoare = COLOR
   stilititlu = STYLE BEFEHL
   culoaretitlu = COLOR
   stilmarcaj = STYLE BEFEHL
   culoaremarcaj = COLOR
   stilsimbol = STYLE BEFEHL
   culoaresimbol = COLOR
   grid = inherits: \definegridsnapping
   packcriterium = NUMMER
   distantacoloane = DIMENSION
   inherits: \setupcounter

```

\setuplabel [...,¹...] [...,²...,...]

```

1  NAME                      OPT
2  titlu                     = da nu
   numar                    = da nu
   comandanumar              = \...#1
   distantatitlu             = DIMENSION
   stiltitlu                 = STYLE BEFEHL
   culoaretitlu              = COLOR
   titlecommand              = \...#1
   titleleft                 = BEFEHL
   titlerright               = BEFEHL
   stanga                    = BEFEHL
   dreapta                   = BEFEHL
   simbol                    = BEFEHL
   starter                   = BEFEHL
   stopper                   = BEFEHL
   cuplare                   = NAME
   counter                   = NAME
   nivel                     = NUMMER
   text                      = TEXT
   headcommand               = \...#1
   inainte                   = BEFEHL
   dupa                      = BEFEHL
   intre                     = BEFEHL
   alternativ                  = stanga dreapta inmargin instanga indreapta margine marginestanga marginedreapta innermargin
                                outermargin serried suspendat sus gol comanda intext NAME

   aliniere                  = inherits: \seteazaalinierea
   headalign                  = inherits: \seteazaalinierea
   aliniat                   = inherits: \seteazaaliniat
   display                   = da nu
   aliniaturmator            = da nu auto
   latime                    = ajustat broad linie DIMENSION
   distanta                  = niciunul DIMENSION
   dilatat                   = NUMMER
   shrink                     = NUMMER
   suspenda                  = ajustat broad niciunul margine NUMMER
   closesymbol               = BEFEHL
   closecommand              = \...#1
   expansiune                = da nu xml
   referenceprefix           = + - TEXT
   exemplu                   = TEXT
   margine                   = da nu standard DIMENSION
   stil                      = STYLE BEFEHL
   culoare                   = COLOR
   stiltitlu                 = STYLE BEFEHL
   culoaretitlu              = COLOR
   alinieretitlu             = da nu
   headindenting             = da nu
   intarziere                = text
   inherits: \setupcounter

```

\setuplayer [...,¹...] [...,²...,...]

```

1  NAME                      OPT
2  stare                     = start stop continuu urmatorul repetat
   optiune                   = test
   pagina                    = NUMMER
   latime                    = DIMENSION
   inaltime                  = DIMENSION
   region                    = NAME
   rotatie                   = stanga dreapta intern extern NUMMER
   pozitie                   = da nu overlay
   hoffset                   = max DIMENSION
   voffset                   = max DIMENSION
   offset                    = DIMENSION
   dx                        = DIMENSION
   dy                        = DIMENSION
   sx                        = NUMMER
   sy                        = NUMMER
   x                         = DIMENSION
   y                         = DIMENSION
   colt                      = stanga centru dreapta sus subsol
   locatie                   = grila stanga centru dreapta sus subsol linie l c r m t b g
   linie                     = NUMMER
   coloana                   = NUMMER
   directie                  = normal reverse
   douafete                  = da nu
   metoda                    = ajustat overlay
   repeta                    = da
   preset                    = lefttop righttop leftbottom rightbottom centru middletop middlebottom middleleft middleright lefttoleft
                                lefttopright NAME

```

```

1  NAME                                     OPT
2  stil      =  STYLE BEFEHL
   culoare  =  COLOR
   inherits: \seteazainconjurat

```

```

1  sus antet text subsol subsol      OPT
2  text margine bordura
3  stare          = start stop gol inalt niciunul normal faramarcare NAME
    stil          = STYLE BEFEHL
    culoare       = COLOR
    strut         = da nu
    n             = NUMMER
    inainte       = BEFEHL
    dupa          = BEFEHL
    textstanga    = TEXT
    textmijloc    = TEXT
    textdreapta   = TEXT
    stilstanga    = STYLE BEFEHL
    middlestyle   = STYLE BEFEHL
    stildreapta   = STYLE BEFEHL
    culoarestanga = COLOR
    middlecolor   = COLOR
    culoaredreapta = COLOR
    latime        = DIMENSION
    latimestanga  = DIMENSION
    middlewidth   = DIMENSION
    marginedreapta = DIMENSION

```

```

1      NAME                                OPT
2      locatie                            = stanga dreapta ambele
      scop                                = stanga dreapta local global
      mp                                  = NAME
      inaltime                            = DIMENSION
      inaltime                            = DIMENSION
      distanta                            = DIMENSION
      threshold                           = DIMENSION
      grosimerigla                        = DIMENSION
      inainte                             = BEFEHL
      dupa                                = BEFEHL
      culoare                             = COLOR
      stiltext                            = STYLE BEFEHL
      culoaretext                         = COLOR
      aliniere                            = inherits: \seteazaalinierea

```

```
1 NAME
2 inherits: \setuplinefiller
```

```

1  NAME                                OPT
2  compress                            = da nu
   compressmethod                      = separator stopper spatium
   compressseparator                   = BEFEHL
   compressdistance                    = DIMENSION
   compressstopper                     = BEFEHL
   inherits: \setupnote

```

```

1  NAME
2  pas      =  DIMENSION
   factor   =  NUMMER
   metoda   =  a
   paragraf =  da nu

```

`\setuplinetable` $[...^1]$ $[...^2]$ $[...^3...]$

```

1  r c                OPT      OPT
2  impar par antet NUMBER
3  linii              = ajustat NUMBER
   inainte            = BEFEHL
   dupa                = BEFEHL
   intre              = BEFEHL
   dilatat            = da nu DIMENSION
   latimemaxima       = ajustat DIMENSION
   nstanga            = NUMBER
   n                  = NUMBER
   repeta             = da nu
   nx                 = NUMBER
   latime             = DIMENSION
   inaltime           = ajustat linie DIMENSION
   distanta           = DIMENSION
   offsetstanga       = DIMENSION
   offsetdreapta      = DIMENSION
   aliniere           = inherits: \setezaalinierea
   fundal             = culoare
   culoarefundal      = COLOR
   xheight            = max DIMENSION
   xdepth             = max DIMENSION
   stil               = STYLE BEFEHL
   culoare            = COLOR

```

`\setuplistalternative` $[...^1...]$ $[...^2...]$

```

1  NAME                OPT
2  inainte              = BEFEHL
   dupa                 = BEFEHL
   comanda              = \...#1#2#3
   renderingsetup       = NAME
   latime               = DIMENSION
   distanta             = DIMENSION
   dilatat              = DIMENSION
   filler               = BEFEHL

```

`\setuplistextra` $[...^1...]$ $[...^2...]$

```

1  NAME                OPT
2  inainte = BEFEHL
   dupa    = BEFEHL

```

`\setuplocalboxes` $[...^1...]$ $[...^2...]$

```

1  NAME                OPT      OPT
2  comanda = BEFEHL
   repeta  = da nu
   locatie = stanga dreapta centru textstanga textdreapta
   latime  = DIMENSION
   distanta = DIMENSION
   stil    =
   culoare = COLOR

```

`\setuplocalfloats` $[...^*...]$

```

*  inainte = BEFEHL
   dupa    = BEFEHL
   intre   = BEFEHL

```

`\setuplocalinterlinespace` $[...^1...]$ $[...^2...]$

```

1  NAME                OPT
2  inherits: \seteazaspatiuinterliniar

```

`\setuplocalinterlinespace` $[...^*...]$

```

*  on dezactivat reset auto mic mediu mare NUMBER DIMENSION

```

`\setuplocalinterlinespace` $[...^*]$

```

*  NAME

```

```

\setuplow   [...] 1 [...] 2 [...]
1  NAME      OPT
2  distanta  = DIMENSION
    down     = DIMENSION
    stil     = STYLE BEFEHL
    culoare  = COLOR

```

```

\setuplowhigh   [...] 1 [...] [...] 2 [...]
1  NAME      OPT
2  distanta  = DIMENSION
    up       = DIMENSION
    down     = DIMENSION
    stil     = STYLE BEFEHL
    culoare  = COLOR

```

```

\setuplowmidhigh   [...] 1 [...] [...] 2 [...]
1  NAME      OPT
2  up        = DIMENSION
    down     = DIMENSION
    stil     = STYLE BEFEHL
    culoare  = COLOR

```

```

\setupMPgraphics   [...] * [...]
*  culoare  = local global
    mpy     = FILE

```

```

\setupMPinstance   [...] 1 [...] [...] 2 [...]
1  NAME      OPT
2  format      = metafun minifun mpost
    initializations = da nu
    setups      = NAME
    stiltext    = STYLE BEFEHL
    culoaretext = COLOR
    extensions  = da nu
    metoda      = binary decimal double scaled posit interval implicit

```

```

\setupMPpage   [...] * [...]
*  inherits: \setupfittingpage

```

```

\setupMPvariables   [...] 1 [...] [...] 2 [...]
1  NAME      OPT
2  KEY = VALUE

```

```

\setupmarginblock   [...] 1 [...] [...] 2 [...]
1  NAME      OPT
2  stare     = start stop
    latime   = DIMENSION
    inainte  = BEFEHL
    dupa     = BEFEHL
    intre    = BEFEHL
    aliniere = inherits: \seteazaalinierea
    stil     = STYLE BEFEHL
    culoare  = COLOR
    sus     = BEFEHL
    jos     = BEFEHL
    locatie = stanga dreapta centru inmarginie
    stanga  = BEFEHL
    dreapta = BEFEHL

```

```

\setupmargindata [...1,...] [...2,...]
1 NAME OPT
2 strut = da nu auto cap ajustat linie implicit CHARACTER
   comanda = \...#1
   latime = DIMENSION
   aliniere = inherits: \setezaalinierea
   anchor = region text
   locatie = stanga dreapta intern extern
   metoda = sus linie primul adancime inaltime
   category = implicit bordura
   scop = local global
   optiune = text paragraf
   margine = local normal margine bordura
   distanta = DIMENSION
   hoffset = DIMENSION
   voffset = DIMENSION
   dy = DIMENSION
   spatiujos = DIMENSION
   threshold = DIMENSION
   linie = NUMMER
   stack = da continuu
   stil = STYLE BEFEHL
   culoare = COLOR

```

```

\setupmarginframed [...1,...] [...2,...]
1 NAME OPT
2 inherits: \setezainconjurat

```

```

\setupmarginrule [...1] [...2,...]
1 NUMMER OPT
2 inherits: \setupsidebar

```

```

\setupmathaccent [...1,...] [...2,...]
1 NAME OPT OPT
2 inherits: \setupmathaccents

```

```

\setupmathaccents [...1,...] [...2,...]
1 NAME OPT OPT
2 mathstyle = display text script scriptscript cramped uncramped normal impachetat mic mare
   scala = da nu mentine
   plugin = mp
   mp = NAME
   culoare = COLOR
   culoaretext = COLOR
   symbolcolor = COLOR
   aliniere = centru
   dilatat = da nu
   shrink = da nu
   snap = da
   alignsymbol = da nu
   offset = auto
   i = auto

```

```

\setupmathalignment [...1,...] [...2,...]
1 NAME OPT
2 n = NUMBER
m = NUMBER
distanta = DIMENSION
numar = auto
numberdistance = DIMENSION
separator = TEXT
aliniere = stanga centru dreapta flushleft flushright normal auto NUMMER:stanga NUMMER:centru NUMMER:dreapta
NUMMER:flushleft NUMMER:flushright
locatie = sus center subsol stanga centru dreapta impachetat despachetat formula
snapping = da normal 0 1 2 0:10 1:10 2:10 2:20 1:top 1:bottom 2:top 2:bottom
mathstyle = display text script scriptscript cramped uncramped normal impachetat mic mare
stiltext = STYLE BEFEHL
textstyle:NUMBER = STYLE BEFEHL
culoaretex = COLOR
textcolor:NUMBER = COLOR
text = TEXT
text:NUMBER = TEXT
fences = cases sesac tekcarb parenthesis bracket brace bar doublebar triplebar angle doubleangle
solidus ceiling floor moustache uppercorner lowercorner group openbracket mirroredparenthesis
mirroredbracket mirroredbrace mirroredbar mirroreddoublebar mirroredtriplebar mirroredangle
mirroreddoubleangle mirroredsolidus mirroredceiling mirroredfloor mirroredmoustache mirroreduppercorner
mirroredlowercorner mirroredgroup mirroredopenbracket interval openinterval closedinterval
leftopeninterval rightopeninterval varopeninterval varleftopeninterval varrightopeninterval
integerinterval tupanddownarrows tupdownarrows tdownuparrows tuparrow tdownarrow abs innerproduct
integerpart norm set sequence tuple
adaptive = da nu
spaceinbetween = inherits: \seteazaspaiualb
referinta = + - REFERENCE
suffix = TEXT
numberthreshold = DIMENSION
grosimerigla = DIMENSION
culoarerigla = COLOR
toffset = DIMENSION
boffset = DIMENSION

```

```

\setupmathannotation [...1,...] [...2,...]
1 NAME OPT
2 sus = TEXT
jos = TEXT
strut = da nu
mathclass = tot begin end unset ordinary operator binary relation open close punctuation variable active intern
under over fraction radical centru prime accent fenced ghost vcenter explicit imaginary differential
exponential integral ellipsis function digit division factorial wrapped construct dimension unary
textpunctuation unspaced experimental fake numbergroup continuation

```

```

\setupmathcases [...1,...] [...2,...]
1 NAME OPT
2 stanga = BEFEHL
dreapta = BEFEHL
strut = da nu
mathstyle = display text script scriptscript cramped uncramped normal impachetat mic mare
distanta = DIMENSION
numberdistance = DIMENSION
simplecommand = NAME
textstanga = TEXT
textdreapta = TEXT
marginestanga = DIMENSION
marginedreapta = DIMENSION
fences = cases sesac tekcarb parenthesis bracket brace bar doublebar triplebar angle doubleangle solidus
ceiling floor moustache uppercorner lowercorner group openbracket mirroredparenthesis mirroredbracket
mirroredbrace mirroredbar mirroreddoublebar mirroredtriplebar mirroredangle mirroreddoubleangle
mirroredsolidus mirroredceiling mirroredfloor mirroredmoustache mirroreduppercorner mirroredlowercorner
mirroredgroup mirroredopenbracket interval openinterval closedinterval leftopeninterval rightopeninterval
varopeninterval varleftopeninterval varrightopeninterval integerinterval tupanddownarrows
tupdownarrows tdownuparrows tuparrow tdownarrow abs innerproduct integerpart norm set sequence
tuple
spaceinbetween = inherits: \seteazaspaiualb

```

`\setupmathdelimited` $[\dots,\dots]$ $[\dots,\dots,\dots]$

```

1  NAME                                OPT
2  define                             = da nu
   strut                             = da nu inalttime adancime math
   marginestanga                     = DIMENSION
   marginedreapta                   = DIMENSION
   alternativ                         = implicit normal
   symbolcolor                       = COLOR
   inalttime                         = DIMENSION
   inalttime                         = DIMENSION
   offsetsus                         = DIMENSION
   offsetjos                        = DIMENSION
   source                           = NAME
   dimensiune                        = NUMMER
   stanga                           = NUMMER
   dreapta                          = NUMMER
   mathmeaning                       = TEXT
   culoare                          = COLOR
   culoaretext                      = COLOR

```

`\setupmathdelimiter` $[\dots,\dots]$ $[\dots,\dots,\dots]$

```

1  NAME                                OPT
2  define                             = da nu
   factor                           = NUMMER
   offsetstanga                     = DIMENSION
   offsetdreapta                   = DIMENSION
   exact                           = da nu
   axa                              = da nu
   inalttime                        = DIMENSION
   inalttime                        = DIMENSION
   simbol                           = NUMMER

```

`\setupmathematics` $[\dots,\dots]$ $[\dots,\dots,\dots]$

```

1  NAME                                OPT                                OPT
2  openup                             = da nu
   setsymbol                         = blackboard-to-bold mikael's-favourites NAME
   functionstyle                     = STYLE BEFEHL
   compact                           = da nu
   aliniere                          = l2r lefttoright r2l righttopleft
   sygreek                          = normal italic niciunul
   lcgreek                          = normal italic niciunul
   ucgreek                          = normal italic niciunul
   italics                          = da nu
   autopunctuation                   = da nu tot comma yes,semicolon comma,semicolon all,semicolon
   setups                            = NAME
   stiltext                          = STYLE BEFEHL
   culoaretext                       = COLOR
   functioncolor                     = COLOR
   integral                         = orizontal vertical auto autolimits limits nolimits
   stylealternative                  = NAME
   implicit                          = normal italic
   collapsing                        = 0 1 2 3 implicit tex lista tot niciunul reset
   kernpairs                         = da nu
   mathconstants                    = italic upright
   differentiald                     = italic upright
   exponentiale                      = italic upright
   imaginaryi                       = italic upright
   imaginaryj                       = italic upright
   constantpi                       = italic upright
   snap                             = da nu
   textdistance                      = DIMENSION
   threshold                        = niciunul mic mediu mare DIMENSION
   mathstyle                         = display text script scriptscript cramped uncramped normal impachetat mic mare
   culoare                          = COLOR
   autospacing                      = da nu
   autonumbers                      = da nu NUMMER
   autofencing                      = da nu
   hz                               = da nu
   alignscripts                     = da nu totdeauna gol
   interscriptfactor                 = NUMMER
   autointervals                    = da nu
   limitstretch                     = da nu
   domain                           = implicit chemistry
   snapping                         = reset linie mic mediu mare

```

```
*  buffer   =  NAME
   fisier   =  FILE
   n        =  NUMMER
   optiune  =  ascii
```

```
1 NAME OPT
2 inherits: \setupmathfences
```

1	NAME		OPT
2	define	=	da nu
	stanga	=	NUMMER
	mijloc	=	NUMMER
	dreapta	=	NUMMER
	mathstyle	=	display text script scriptscript cramped uncramped normal impachetat mic mare
	culoare	=	COLOR
	culoarestanga	=	COLOR
	middlecolor	=	COLOR
	culoaredreapta	=	COLOR
	symbolcolor	=	COLOR
	stare	=	auto
	metoda	=	auto
	dimensiune	=	mare Big bigg Bigg NUMMER
	factor	=	niciunul fixat fortat dimensiune auto NUMMER
	overflow	=	nu auto
	mathclass	=	tot begin end unset ordinary operator binary relation open close punctuation variable active intern under over fraction radical centru prime accent fenced ghost vcenter explicit imaginary differential exponential integral ellipsis function digit division factorial wrapped construct dimension unary textpunctuation unspaced experimental fake numbergroup continuation
	inaltime	=	DIMENSION
	inaltime	=	DIMENSION
	plugin	=	mp
	mp	=	NAME
	displayfactor	=	NUMMER
	inlinefactor	=	NUMMER
	mathmeaning	=	TEXT
	spatiusus	=	DIMENSION
	spatiujos	=	DIMENSION
	snap	=	da nu
	alternativ	=	mic mare
	setups	=	NAME
	source	=	NUMMER
	leftsource	=	NUMMER
	middlesource	=	NUMMER
	rightsource	=	NUMMER
	stilstanga	=	STYLE BEFEHL
	stildreapta	=	STYLE BEFEHL
	leftclass	=	NUMMER
	middleclass	=	NUMMER
	rightclass	=	NUMMER
	distanta	=	DIMENSION
	text	=	da nu

```
1 NAME OPT
2 inherits: \setupmathfractions
```

```

\setupmathfractions [...1,...] [...2,...]
1 NAME OPT
2 distantasus = DIMENSION
  distantajos = DIMENSION
  margine = DIMENSION
  culoare = COLOR
  culoaretext = COLOR
  symbolcolor = COLOR
  topcolor = COLOR
  bottomcolor = COLOR
  strut = da nu tight text math
  alternativ = intern extern ambele
  rigla = da nu auto ascuns simbol
  stanga = NUMMER
  dreapta = NUMMER
  mijloc = NUMMER
  simbol = NUMMER
  grosimerigla = font DIMENSION
  mathstyle = STYLE BEFEHL
  mathnumeratorstyle = STYLE BEFEHL
  mathdenominatorstyle = STYLE BEFEHL
  distanta = nu niciunul sus subsol ambele overlay DIMENSION
  threshold = DIMENSION
  inlinethreshold = auto NUMMER
  displaythreshold = auto NUMMER
  fences =
  mathmeaning = binom limits
  mathclass = tot begin end unset ordinary operator binary relation open close punctuation variable
    active intern under over fraction radical centru prime accent fenced ghost vcenter
    explicit imaginary differential exponential integral ellipsis function digit division
    factorial wrapped construct dimension unary textpunctuation unspaced experimental fake
    numbergroup continuation
  hfactor = NUMMER
  metoda = orizontal vertical linie
  plugin = mp
  mp = NAME
  vfactor = NUMMER
  source = NAME
  topalign = stanga dreapta centru flushleft flushright split:flushleft split:flushright
  bottomalign = stanga dreapta centru flushleft flushright split:flushleft split:flushright

```

```

\setupmathframed [...1,...] [...2,...]
1 NAME OPT
2 mathstyle = display text script scriptscript cramped uncramped normal impachetat mic mare
  mathclass = tot begin end unset ordinary operator binary relation open close punctuation variable active intern
    under over fraction radical centru prime accent fenced ghost vcenter explicit imaginary differential
    exponential integral ellipsis function digit division factorial wrapped construct dimension unary
    textpunctuation unspaced experimental fake numbergroup continuation
  inherits: \seteazainconjurat

```

```

\setupmathfunction [...1,...] [...2,...]
1 NAME OPT
2 inherits: \setupmathfunctions

```

```

\setupmathfunctions [...1,...] [...2,...]
1 NAME OPT
2 culoare = COLOR
  stil = STYLE BEFEHL
  class = tot begin end unset ordinary operator binary relation open close punctuation variable active intern
    under over fraction radical centru prime accent fenced ghost vcenter explicit imaginary differential
    exponential integral ellipsis function digit division factorial wrapped construct dimension unary
    textpunctuation unspaced experimental fake numbergroup continuation
  stanga = BEFEHL
  dreapta = BEFEHL
  mathlimits = da nu auto
  metoda = limits
  comanda = \...#1

```

```

\setupmathmatrix    [...,1...]    [...,2...,...]
1  NAME              OPT
2  stanga             = BEFEHL
   dreapta            = BEFEHL
   strut              = da nu NUMMER
   aliniere           = stanga centru dreapta flushleft flushright normal auto NUMMER:stanga NUMMER:centru NUMMER:dreapta
                        NUMMER:flushleft NUMMER:flushright
   mathstyle          = display text script scriptscript cramped uncramped normal impachetat mic mare
   distanta           = DIMENSION
   simplecommand      = TEXT
   locatie            = sus subsol inalt jos lohi center normal
   grosimerigla       = DIMENSION
   culoarerigla       = COLOR
   moffset             = DIMENSION
   toffset            = DIMENSION
   boffset            = DIMENSION
   marginestanga      = DIMENSION
   marginedreapta     = DIMENSION
   fences             = cases sesac tekcarb parenthesis bracket brace bar doublebar triplebar angle doubleangle solidus
                        ceiling floor moustache uppercorner lowercorner group openbracket mirroredparenthesis mirroredbracket
                        mirroredbrace mirroredbar mirroreddoublebar mirroredtriplebar mirroredangle mirroreddoubleangle
                        mirroredsolidus mirroredceiling mirroredfloor mirroredmoustache mirroreduppercorner mirroredlowercorner
                        mirroredgroup mirroredopenbracket interval openinterval closedinterval leftopeninterval rightopeninterval
                        varopeninterval varleftopeninterval varrightopeninterval integerinterval tupanddownarrows
                        tupdownarrows tdownuparrows tuparrow tdownarrow abs innerproduct integerpart norm set sequence
                        tuple
   bordurastanga      = niciunul DIMENSION
   borduradreapta     = niciunul DIMENSION
   actiune            = transpose negate scale

```

```

\setupmathnesting   [...,1...]    [...,2...,...]
1  NAME              OPT
2  stanga             = BEFEHL
   dreapta            = BEFEHL
   displayfactor      = NUMMER
   inlinefactor       = NUMMER

```

```

\setupmathoperator   [...,1...]    [...,2...,...]
1  NAME              OPT
2  inherits: \setupmathoperators

```

```

\setupmathoperators  [...,1...]    [...,2...,...]
1  NAME              OPT
2  mathclass         = tot begin end unset ordinary operator binary relation open close punctuation variable active
                        intern under over fraction radical centru prime accent fenced ghost vcenter explicit imaginary
                        differential exponential integral ellipsis function digit division factorial wrapped construct
                        dimension unary textpunctuation unspaced experimental fake numbergroup continuation
   symbolcolor       = COLOR
   metoda            = orizontal vertical auto autolimits limits nolimits
   dimensiune        = auto DIMENSION
   sus               = TEXT
   topcolor          = COLOR
   jos               = TEXT
   bottomcolor       = COLOR
   culoaretext       = COLOR
   culoare           = COLOR
   culoarenumar      = COLOR
   stanga            = NUMMER

```

```

\setupmathornament   [...,1...]    [...,2...,...]
1  NAME              OPT
2  alternativ          = mp
   culoare            = COLOR
   mppoffset          = DIMENSION
   mp                 = NAME

```

`\setupmathradical` $[...,\overset{1}{...}]$ $[...,\overset{2}{...},...]$

```

1  NAME
2  culoare          = COLOR
   culoaretext      = COLOR
   culoarenumar     = COLOR
   symbolcolor      = COLOR
   plugin           = mp
   mp               = NAME
   stanga           = NUMMER
   dreapta          = NUMMER
   sus             = NUMMER
   n               = TEXT
   inaltime         = niciunul DIMENSION
   inaltime         = niciunul DIMENSION
   mindepth         = DIMENSION
   marginestanga    = DIMENSION
   marginedreapta   = DIMENSION
   rigla            = da nu simbol subsol
   source           = NAME
   mathstyle        = display text script scriptscript cramped uncramped normal impachetat mic mare
   strut            = da nu inaltime adancime math

```

`\setupmathsimplealign` $[...,\overset{1}{...}]$ $[...,\overset{2}{...},...]$

```

1  NAME
2  strut            = da nu
   aliniere         = normal flushright stanga dreapta flushleft centru NUMMER:normal NUMMER:flushright NUMMER:stanga
                     NUMMER:dreapta NUMMER:flushleft NUMMER:centru
   locatie          = sus subsol center centru stanga dreapta impachetat formula
   distanta         = math DIMENSION
   spaceinbetween   = inherits: \seteazaspatiualb
   marginestanga    = DIMENSION
   marginedreapta   = DIMENSION
   stanga           = BEFEHL
   dreapta          = BEFEHL
   fences           = cases sesac tekcarb parenthesis bracket brace bar doublebar triplebar angle doubleangle solidus
                     ceiling floor moustache uppercorner lowercorner group openbracket mirroredparenthesis mirroredbracket
                     mirroredbrace mirroredbar mirroreddoublebar mirroredtriplebar mirroredangle mirroreddoubleangle
                     mirroredsolidus mirroredceiling mirroredfloor mirroredmoustache mirroreduppercorner mirroredlowercorner
                     mirroredgroup mirroredopenbracket interval openinterval closedinterval leftopeninterval rightopeninterval
                     varopeninterval varleftopeninterval varrightopeninterval integerinterval tupanddownarrows
                     tupdownarrows tdownuparrows tuparrow tdownarrow abs innerproduct integerpart norm set sequence
                     tuple
   text             = TEXT
   textdistance     = DIMENSION
   alternativ        = equationsystem
   simplecommand    = NAME

```

`\setupmathspacing` $[...]$

* normal tight larg ingust larg less more chemistry NAME

`\setupmathstackers` [$\dots^1, \dots$] [$\dots^2, \dots$]

```

1  NAME                                OPT
2  sus                                = TEXT
   jos                                = TEXT
   stanga                             = BEFEHL
   dreapta                             = BEFEHL
   topcommand                         = \...#1
   bottomcommand                     = \...#1
   middlecommand                     = \...#1
   topstyle                           = STYLE BEFEHL
   bottomstyle                       = STYLE BEFEHL
   middlestyle                       = STYLE BEFEHL
   topcolor                           = COLOR
   bottomcolor                       = COLOR
   middlecolor                       = COLOR
   topalign                           = stanga dreapta centru flushleft flushright intern extern
   bottomalign                       = stanga dreapta centru flushleft flushright intern extern
   plugin                             = mp
   mp                                 = NAME
   mpheight                           = DIMENSION
   mpdepth                           = DIMENSION
   mpoffset                           = DIMENSION
   culoare                             = COLOR
   symbolcolor                       = COLOR
   offsetsus                          = DIMENSION
   hoffset                            = DIMENSION
   voffset                            = DIMENSION
   inaltimeminima                     = DIMENSION
   mindepth                           = DIMENSION
   mathclass                         = tot begin end unset ordinary operator binary relation open close punctuation variable active
                                   intern under over fraction radical centru prime accent fenced ghost vcenter explicit imaginary
                                   differential exponential integral ellipsis function digit division factorial wrapped construct
                                   dimension unary textpunctuation unspaced experimental fake numbergroup continuation

   offset                             = min max normal
   locatie                             = sus subsol inalt jos centru NUMMER
   strut                              = da nu
   alternativ                          = normal implicit mp
   latimeminima                       = DIMENSION
   distanta                           = DIMENSION
   order                              = normal reverse
   mathlimits                         = da nu
   lt                                 = DIMENSION
   rt                                 = DIMENSION
   lb                                 = DIMENSION
   rb                                 = DIMENSION
   shrink                             = da nu
   dilatat                            = da nu
   exemplu                            = NUMMER

```

`\setupmathstyle` [$\dots^*, \dots$]

* display text script scriptscript cramped uncramped normal impachetat mic mare NAME

`\setupmathtext` [$\dots^1, \dots$] [$\dots^2, \dots$]

```

1  NAME                                OPT
2  alternativ                          = split cuvant
   stil                              = STYLE BEFEHL
   culoare                             = COLOR
   class                             = tot begin end unset ordinary operator binary relation open close punctuation variable active intern
                                   under over fraction radical centru prime accent fenced ghost vcenter explicit imaginary differential
                                   exponential integral ellipsis function digit division factorial wrapped construct dimension unary
                                   textpunctuation unspaced experimental fake numbergroup continuation

   leftclass                         = tot begin end unset ordinary operator binary relation open close punctuation variable active intern
                                   under over fraction radical centru prime accent fenced ghost vcenter explicit imaginary differential
                                   exponential integral ellipsis function digit division factorial wrapped construct dimension unary
                                   textpunctuation unspaced experimental fake numbergroup continuation

   rightclass                        = tot begin end unset ordinary operator binary relation open close punctuation variable active intern
                                   under over fraction radical centru prime accent fenced ghost vcenter explicit imaginary differential
                                   exponential integral ellipsis function digit division factorial wrapped construct dimension unary
                                   textpunctuation unspaced experimental fake numbergroup continuation

```

`\setupmetadata` [$\dots^*, \dots$]

```

*  titlu                             = TEXT
   subtitlu                          = TEXT
   autor                             = TEXT
   keyword                           = TEXT
   data                              = TEXT

```

\setupmixedcolumns [...¹,...] [...²,...]

1 NAME OPT
2 grid = inherits: \definegridsnapping
grosimerigla = DIMENSION
metoda = otr box
inainte = BEFEHL
dupa = BEFEHL
distanta = DIMENSION
n = NUMMER
inaltimemaxima = DIMENSION
latimemaxima = DIMENSION
pas = DIMENSION
profile = NAME
alinieri = inherits: \seteazaalinieri
setups = NAME
balanta = da nu
splitmethod = niciunul fixat
alternativ = local global
internalgrid = linie jumatatelinie
separator = rigla
strut = da nu
culoare = COLOR
culoarerigla = COLOR
directie = normal reverse
notes = da nu
blanc = inherits: \blanc
aliniat = inherits: \seteazaaliniat
profile = NAME
define = da nu
inherits: \seteazainconjurat

\setupmodule [...¹] [...²,...]

1 FILE OPT
2 test = da nu
KEY = VALUE

\setupmulticolumns [...¹,...] [...²,...]

1 NAME OPT
2 n = NUMMER
distanta = DIMENSION
directie = dreapta reverse
balanta = da nu
blanc = inherits: \blanc
alinieri = inherits: \seteazaalinieri
nsus = NUMMER

```

\setupnotation    [...,1...]    [...,2...,...]
1  NAME          OPT
2  titlu          = da nu
   numar          = da nu
   type           = note
   comandanumar   = \...#1
   distantatitlu  = DIMENSION
   stiltitlu      = STYLE BEFEHL
   culoaretitlu   = COLOR
   titlecommand   = \...#1
   titleleft      = BEFEHL
   titleright     = BEFEHL
   stanga         = BEFEHL
   dreapta        = BEFEHL
   simbol         = BEFEHL
   starter        = BEFEHL
   stopper        = BEFEHL
   cuplare        = NAME
   counter        = NAME
   nivel          = NUMMER
   text           = TEXT
   headcommand    = \...#1
   deeptextcommand = \...#1
   inainte        = BEFEHL
   dupa           = BEFEHL
   intre          = BEFEHL
   alternativ      = stanga dreapta inmargin instanga indreapta margine marginestanga marginedreapta innermargin
                   outermargin serried suspendat sus comanda note NAME
   aliniere       = inherits: \seteazaalinierea
   headalign      = inherits: \seteazaalinierea
   aliniat        = inherits: \seteazaaliniat
   display        = da nu
   aliniaturmator = da nu auto
   latime         = ajustat broad linie DIMENSION
   distanta       = niciunul DIMENSION
   dilatat        = NUMMER
   shrink         = NUMMER
   suspenda       = ajustat broad niciunul margine NUMMER
   closesymbol    = BEFEHL
   closecommand   = \...#1
   expansiune     = da nu xml
   referenceprefix = + - TEXT
   exemplu        = TEXT
   margine        = da nu standard DIMENSION
   stil           = STYLE BEFEHL
   culoare        = COLOR
   stiltitlu      = STYLE BEFEHL
   culoaretitlu   = COLOR
   alinieretitlu  = da nu
   headindenting  = da nu
   intarziere     = text
   inherits: \setupcounter

```

```

\setupnotations  [...,1...]    [...,2...,...]
1  NAME          OPT
2  inherits: \setupnotation

```

\setupnote [...,¹...] [...,²...,...]

```

1  NAME                      OPT
2  interactiune              = da nu numar text tot
   symbolcommand              = \...#1
   comandatext                = \...#1
   indicator                  = da nu
   separatorstext             = BEFEHL
   latime                     = DIMENSION
   inaltime                   = DIMENSION
   distanta                   = DIMENSION
   rulecommand                = BEFEHL
   rigla                      = on dezactivat normal stanga dreapta comanda paragraf
   split                      = tolerant strict foartestric NUMBER
   factor                     = NUMBER
   locatie                    = text pagina lista inalt subsol niciunul coloane firstcolumn lastcolumn
   urmatorul                  = BEFEHL
   n                           = NUMBER
   culoarerigla               = COLOR
   grosimerigla               = DIMENSION
   rulewidth                  = DIMENSION
   ruledistance               = DIMENSION
   setups                     = NAME
   spatiereinterliniara      = NAME
   paragraf                   = da nu
   inainte                    = BEFEHL
   dupa                       = BEFEHL
   intre                      = BEFEHL
   scop                       = pagina
   distantacoloane            = DIMENSION
   continua                   = da nu
   alternativ                  = grila fixat coloane note niciunul
   criteriu                   = pagina
   fonttext                   = inherits: \seteazafonttext
   aliniere                   = inherits: \seteazaaliniere
   stiltext                   = STYLE BEFEHL
   culoaretext                = COLOR
   anchor                     = urmatorul
   range                      = da
   spatiuinainte              = inherits: \blanc
   spaceinbetween             = inherits: \blanc
   inherits: \seteazainconjurat

```

\setupnotes [...,¹...] [...,²...,...]

```

1  NAME                      OPT
2  inherits: \setupnote

```

\setupoffset [...,^{*}...,...]

```

*  inherits: \setupoffsetbox

```

\setupoffsetbox [...,^{*}...,...]

```

*  x                          = DIMENSION
   y                          = DIMENSION
   offsetstanga               = DIMENSION
   offsetdreapta              = DIMENSION
   offsetsus                  = DIMENSION
   offsetjos                  = DIMENSION
   metoda                     = fixat
   latime                     = DIMENSION
   inaltime                   = DIMENSION
   inaltime                   = DIMENSION
   locatie                    = stanga centru dreapta sus subsol linie l c r m t b g

```

\setuptoptimize [...,¹...] [...,²...,...]

```

1  NAME                      OPT
2  stanga                     = DIMENSION
   dreapta                    = DIMENSION
   linii                      = NUMBER
   distanta                    = DIMENSION

```

\setuporientation [...,¹...] [...,²...,...]

```

1  NAME                      OPT
2  orientation                = up down stanga dreapta sus subsol normal linie
   orizontal                  = stanga centru dreapta flushleft flushright normal
   vertical                   = linie sus centru subsol normal

```

```
\setupoutputroutine [...] [...1..2..]
```

\setupoutputroutine [...]

$$\backslash\mathrm{setuppagechecker} \quad [\dots,\overset{1}{\dots}] \quad [\dots,\overset{2}{\dots}=\dots,\dots]$$

`\setuppagecolumns` $[...,\overset{1}{...}]$ $[...,\overset{2}{...},...]$

$$\backslash\mathrm{setuppageinjection} \quad [\dots, \dots]^1 \quad [\dots, \dots]^2 \dots$$
$$\backslash\mathrm{setuppageinjectionalternative} \quad [\dots,\dots] \quad [\dots,\dots\stackrel{2}{=}\dots,\dots]$$

`\setuppageshift` [¹...] [²...] [³...]

$$\backslash\mathrm{setuppagestate} \quad [\dots, \dots]^1 \quad [\dots, \dots]^2 \dots, \dots]$$
$$\backslash\mathrm{setuppairedbox} \quad [\ldots, \overset{1}{\ldots}] \quad [\ldots, \overset{2}{\ldots} \ldots, \ldots]$$

\setarePAIREDBOX [...^{*}...]

* inherits: \setuppairedbox

instances: legend

\setarelegend [...^{*}...]

* inherits: \setuppairedbox

\setuppaper [...^{*}...]

* inherits: \seteazadimensiunihartie

\setupparagraph [...¹...] [...²...]

1 NAME OPT
2 stil = STYLE BEFEHL
culoare = COLOR
alinieri = inherits: \seteazaalinieria
setups = NAME

\setupparagraphintro [...¹...] [...²...]

1 reset fiecare primul urmatorul
2 BEFEHL

\setupparallel [...¹] [...²...] [...³...]

1 NAME
2 NAME
3 setups = NAME
start = NUMMER
n = NUMMER
criteriu = tot

\setupparinsert [...¹...] [...²...]

1 NAME OPT
2 xoffset = DIMENSION
yoffset = DIMENSION
distanta = DIMENSION
linii = NUMMER
locatie = stanga dreapta
optiune = adancime
stil = STYLE BEFEHL
culoare = COLOR

\setupperiodkerning [...¹...] [...²...]

1 NAME OPT
2 factor = NUMMER

\setupperiods [...^{*}...]

* n = NUMMER
latime = DIMENSION ajustat
distanta = DIMENSION
simbol = BEFEHL

\setupplaceholder [...¹...] [...²...]

1 NAME OPT
2 inainte = BEFEHL
dupa = BEFEHL
text = TEXT
stil = STYLE BEFEHL
culoare = COLOR

\setupplacement [...¹...] [...²...]

1 NAME OPT
2 inainte = BEFEHL
dupa = BEFEHL
stanga = BEFEHL
dreapta = BEFEHL
grid = inherits: \snaptogrid
corectielinie = on dezactivat
corectieadancime = on dezactivat
margine = da nu standard

\setuppositionbar [...,^{*}...]

* stil = STYLE BEFEHL
culoare = COLOR
n = NUMMER
min = NUMMER
max = NUMMER
text = TEXT
latime = DIMENSION
inaltime = DIMENSION
inaltime = DIMENSION

\setupprocessor [...,¹...] [...,²...]

1 NAME OPT
2 stare = start stop
stanga = BEFEHL
dreapta = BEFEHL
comanda = \...#1
stil = STYLE BEFEHL
culoare = COLOR

\setupprofile [...,¹...] [...,²...]

1 NAME OPT
2 inaltime = DIMENSION
inaltime = DIMENSION
distanta = DIMENSION
factor = NUMMER
linii = NUMMER
metoda = strict fixat niciunul
define = da nu

\setupquotation [...,^{*}...]

* inherits: \setupdelimitedtext

\setuprealpagenumber [...,^{*}...]

* inherits: \setupcounter

\setupreferenceformat [...,¹...] [...,²...]

1 NAME OPT
2 eticheta = * NAME
stanga = BEFEHL
dreapta = BEFEHL
type = implicit text titlu numar pagina realpage
setups = NAME
autocase = da nu
text = TEXT
stil = STYLE BEFEHL
culoare = COLOR

\setupreferenceprefix [...]

* + - TEXT

\setupreferencestructureprefix [...¹] [...²] [...,³...]

1 NAME ABSCHNITT OPT
2 implicit OPT
3 prefix = da nu
prefixseparatorset = NAME
prefixconversion = NAME
prefixconversionset = NAME
prefixstarter = BEFEHL PROCESSOR->BEFEHL
prefixstopper = BEFEHL PROCESSOR->BEFEHL
prefixset = NAME
prefixsegments = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:* ABSCHNITT:tot
curent
numberconversion = NAME
numberconversionset = NAME
numberstarter = BEFEHL PROCESSOR->BEFEHL
numberstopper = BEFEHL PROCESSOR->BEFEHL
numbersegments = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot
numberseparatorset = NAME
prefixconnector = BEFEHL PROCESSOR->BEFEHL

```

\setupregisters [1...] [2...,...2...,...]
1 NAME NAME:NUMBER OPT
2 referencemethod = avans
expansiune = da nu xml
numarpropriu = da nu
xmlsetup = NAME
alternativ = a b A B
metoda = implicit inainte dupa primul ultim ch mm zm pm mc zc pc uc
compress = da nu tot impachetat text
check = da nu
criteriu = local text curent precedent tot ABSCHNITT
pageprefixseparatorset = BEFEHL
pageprefixconversionset = NAME
pageprefixstarter = BEFEHL PROCESSOR->BEFEHL
pageprefixstopper = BEFEHL PROCESSOR->BEFEHL
pageprefixset = NAME
pageprefixsegments = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
ABSCHNITT:tot curent
pageprefixconnector = BEFEHL
pageprefix = da nu
pageseparatorset = NAME
pageconversionset = NAME
pagestarter = BEFEHL PROCESSOR->BEFEHL
pagestopper = BEFEHL PROCESSOR->BEFEHL
pagesegments = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot
latimemaxima = DIMENSION
indicator = da nu
inainte = BEFEHL
dupa = BEFEHL
comanda = \...#1
comandatext = \...#1
deeptextcommand = \...#1
comandapagina = \...#1
distanta = DIMENSION
interactiune = text numarpagina
numarpagina = da nu
simbol = a n niciunul 1 2 BEFEHL
language = implicit DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scن SPRACHE
stil = STYLE BEFEHL
culoare = COLOR
stiltext = STYLE BEFEHL
culoaretexن = COLOR
stilpagina = STYLE BEFEHL
culoarepagina = COLOR
pageleft = BEFEHL
pageright = BEFEHL
n = NUMMER
balanta = da nu
aliniere = inherits: \seteazaalinierea
numberorder = numere
pagemethod = pagina sectiune

```

```

\setupregisters    [...,1...]    [...,2...]    [...,3...,...]
1  NAME                OPT                OPT
2  NUMMER
3  referencemethod      = avans
   expansiune           = da nu xml
   numarpropriu         = da nu
   xmlsetup             = NAME
   alternativ            = a b A B
   metoda               = implicit inainte dupa primul ultim ch mm zm pm mc zc pc uc
   compress             = da nu tot impachetat text
   check                = da nu
   criteriu             = local text curent precedent tot ABSCHNITT
   pageprefixseparatorset = BEFEHL
   pageprefixconversionset = NAME
   pageprefixstarter    = BEFEHL PROCESSOR->BEFEHL
   pageprefixstopper    = BEFEHL PROCESSOR->BEFEHL
   pageprefixset        = NAME
   pageprefixsegments   = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
                        ABSCHNITT:tot curent

   pageprefixconnector  = BEFEHL
   pageprefix           = da nu
   pageseparatorset     = NAME
   pageconversionset    = NAME
   pagestarter          = BEFEHL PROCESSOR->BEFEHL
   pagestopper          = BEFEHL PROCESSOR->BEFEHL
   pagesegments         = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:tot
   latimemaxima         = DIMENSION
   indicator            = da nu
   inainte              = BEFEHL
   dupa                 = BEFEHL
   comanda              = \...#1
   comandatext          = \...#1
   deeptextcommand      = \...#1
   comandapagina        = \...#1
   distanta             = DIMENSION
   interactiune         = text numarpagina
   numarpagina          = da nu
   simbol               = a n niciunul 1 2 BEFEHL
   language             = implicit DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scen SPRACHE
   stil                 = STYLE BEFEHL
   culoare              = COLOR
   stiltext             = STYLE BEFEHL
   culoaretext          = COLOR
   stilpagina           = STYLE BEFEHL
   culoarepagina        = COLOR
   pageleft             = BEFEHL
   pageright            = BEFEHL
   n                    = NUMBER
   balanta              = da nu
   aliniere             = inherits: \seteazaalinierea
   numberorder          = numere
   pagemethod           = pagina sectiune

```

```

\setuprenderingwindow [...,1...]    [...,2...,...]
1  NAME                OPT
2  actiunedeschiderepagina = REFERENCE
   actiuneinchiderepagina  = REFERENCE
   inherits: \seteazaainconjurat

```

```

\setuprows    [...,1...]    [...,2...,...]
1  NAME                OPT
2  define              = da nu
   n                   = NUMBER
   distanta            = DIMENSION
   latime              = ajustat DIMENSION
   aliniere            = inherits: \seteazaalinierea
   inainte             = BEFEHL
   dupa                = BEFEHL
   alternativ           = tight
   order               = vertical
   inaltime            = max DIMENSION
   inaltime            = max DIMENSION

```

```

\setupruby    [...,1...]    [...,2...,...]
1  NAME      OPT
2  locatie   = sus stanga dreapta niciunul
    aliniere  = auto flushleft centru flushright
    dilatat  = da nu
    hoffset  = DIMENSION
    voffset  = DIMENSION
    distanta = niciunul DIMENSION
    stanga   = BEFEHL
    dreapta  = BEFEHL
    stil     = STYLE BEFEHL
    culoare  = COLOR

```

```

\setups      [...,*...]
*  NAME

```

```

\setupsavebuffer [...,1...]    [...,2...,...]
1  NAME      OPT
2  lista     = BUFFER
    fisier   = FILE
    prefix   = da nu
    optiune  = append
    director = TEXT

```

```

\setupscale   [...,1...]    [...,2...,...]
1  NAME      OPT
2  scala     = NUMMER
    xscala   = NUMMER
    yscala   = NUMMER
    ltime    = DIMENSION
    inaltime = DIMENSION
    inaltime = da nu
    linii    = NUMMER
    factor   = ajustat broad max min auto implicit
    hfactor  = ajustat broad max min auto implicit
    factorw  = ajustat broad max min auto implicit
    latimemaxima = DIMENSION
    inaltimemaxima = DIMENSION
    s        = NUMMER
    sx       = NUMMER
    sy       = NUMMER
    equalwidth = DIMENSION
    equalheight = DIMENSION
    grid     = da ajustat inaltime adancime jumatatelinie

```

```

\setupscript  [...,1...]    [...,2...,...]
1  NAME      OPT
2  metoda    = hangul hanzi nihongo ethiopic thai tibetan test
    preset   = NAME
    features  = auto

```

```

\setupscripts [...,1...]    [...,2...,...]
1  NAME      OPT
2  inherits: \setupscript

```

```

\setupselector [...1]    [...,2...,...]
1  NAME
2  n      = NUMMER
    max   = NUMMER

```

```

\setupshadow  [...,1...]    [...,2...,...]
1  NAME      OPT
2  stil       = STYLE BEFEHL
    culoare   = COLOR
    culoarecontrast = COLOR
    continua  = da nu tot
    unitate   = ex em pt in cm mm sp bp pc dd cc nc
    weight    = NUMMER
    dx        = NUMMER
    dy        = NUMMER

```

\setupshapedparagraph [$\dots$, $\dots^{\ast}\dots$, $\dots$]

* mp = NAME
repetă = da nu
lista = NAME
metoda = cycle shift
voffset = DIMENSION
hoffset = DIMENSION
distanța = DIMENSION
linii = NUMMER
latime = DIMENSION
text = TEXT

\setupshift [$\dots$, $\dots^1$, $\dots$] [$\dots$, $\dots^2$, $\dots$, $\dots$]

1 NAME OPT
2 continua = da nu
unitate = ex em pt in cm mm sp bp pc dd cc nc
metoda = NUMMER
dy = NUMMER
alinie = inherits: \seteazaalinie
stil = STYLE BEFEHL
culoare = COLOR

\setupsidebar [$\dots$, $\dots^1$, $\dots$] [$\dots$, $\dots^2$, $\dots$, $\dots$]

1 NAME OPT
2 grosimerigla = DIMENSION
culoarerigla = COLOR
alternativ = NUMMER
offsetsus = DIMENSION
offsetjos = DIMENSION
distanța = DIMENSION
distantamarginestanga = DIMENSION
nivel = NUMMER
locatie = stanga dreapta intern extern

\setupspellchecking [$\dots$, $\dots^{\ast}\dots$, $\dots$]

* stare = start stop
metoda = 1 2 3
lista = NAME

\setupstacking [$\dots$, $\dots^1$, $\dots$] [$\dots$, $\dots^2$, $\dots$, $\dots$]

1 NAME OPT
2 define = da nu
criteriu = NAME
numar = NUMMER

\setupstartstop [$\dots$, $\dots^1$, $\dots$] [$\dots$, $\dots^2$, $\dots$, $\dots$]

1 NAME OPT
2 inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL
setups = NAME
stanga = BEFEHL
dreapta = BEFEHL
stil = STYLE BEFEHL
culoare = COLOR
arguments = da nu

\setupstretched [$\dots$, $\dots^{\ast}\dots$, $\dots$]

* inherits: \setupcharacterkerning

\setupstyle [$\dots$, $\dots^1$, $\dots$] [$\dots$, $\dots^2$, $\dots$, $\dots$]

1 NAME OPT
2 metoda = comanda
stil = STYLE BEFEHL
culoare = COLOR

```

\setupsubcolumnset  [...,1...]  [...,2...]
1  NAME
2  sus           = BEFEHL
   jos           = BEFEHL
   spatiuinainte = linie
   spatiudupa    = linie
   inainte       = BEFEHL
   dupa          = BEFEHL
   language      = SPRACHE
   stil          = STYLE BEFEHL
   culoare       = COLOR
   aliniere      = inherits: \setezaalinierea

```

```

\setupsubformula  [...,1...]  [...,2...]
1  NAME
2  inherits: \setupsubformulas

```

```

\setupsubformulas  [...,1...]  [...,2...]
1  NAME
2  aliniaturmator = da nu auto

```

```

\setupsymbols  [...,*...]
*  stylealternative = text math

```

```

\setupsynchronize  [...,1...]  [...,2...]
1  NAME
2  distanta = DIMENSION
   lista    = NAME
   split     = TEXT
   buffer    = NAME
   text      = TEXT
   stil      = STYLE BEFEHL
   culoare   = COLOR

```

```

\setupsynchronizecontent  [...,1...]  [...,2...]
1  NAME
2  stanga = BEFEHL
   dreapta = BEFEHL
   language = SPRACHE
   stil = STYLE BEFEHL
   culoare = COLOR

```

```

\setupsynctex  [...,*...]
*  stare = start stop repetat
   metoda = min max
   compress = da nu

```

```

\setups  {...,*...}
*  NAME

```

```

\setupTABLE [...,1...] [...,2...] [...,3...,...]
1 r c x y rand coloanOPTprimul ultim sOPTtart antet fiecare impar par unu NUMMER -NUMMER
2 primul least fiecare doi impar par NUMMER -NUMMER
3 extras = BEFEHL
  stanga = BEFEHL
  dreapta = BEFEHL
  culoaretitlu = COLOR
  stiltitlu = STYLE BEFEHL
  distantamarginestanga = DIMENSION
  distantamarginedreapta = DIMENSION
  distantacoloane = DIMENSION
  latimemaxima = DIMENSION
  setups = NAME
  latimetext = DIMENSION local
  split = da nu repetat pagina auto
  antet = repetat
  optiune = dilatat tight
  inainte = BEFEHL
  dupa = BEFEHL
  aceeasipagina = inainte dupa ambele
  spaceinbetween = inherits: \blanc
  splitoffset = DIMENSION
  aliniazacaracter = da nu
  alierecaracter = TEXT number->TEXT text->TEXT
  distanta = DIMENSION
  culoare = COLOR
  stil = math STYLE BEFEHL
  synchronize = fundal
  directie = normal reverse
  inherits: \seteazainconjurat

```

```

\setupTEXpage [...,*...]
* inherits: \setupfittingpage

```

```

\setuptabulatemove [...,1...] [...,2...,...]
1 NAME OPT
2 xoffset = DIMENSION
  yoffset = inaltime adancime DIMENSION
  orientation = NUMMER

```

```

\setuptagging [...,*...,...]
* stare = start stop on dezactivat
  metoda = auto
  preset = basic demo mkiv uac
  nivel = NUMMER
  comment = TEXT
  optiune = interactiune

```

	NAME	OPT
1	stare	= start stop
2	locatie	= text paragraf totdeauna niciunul
	criteriu	= NUMBER
	alternativ	= NUMBER
	mp	= NAME
	metoda	= NAME
	fundal	= culoare
	culoarefundal	= COLOR
	colt	= rectangular rotund
	nivel	= NUMBER
	offsetfundal	= DIMENSION
	inainte	= BEFEHL
	dupa	= BEFEHL
	aliniere	= inherits: \seteazaalinierea
	dash	= NUMBER
	raza	= DIMENSION
	frame	= on dezactivat
	culoareframe	= COLOR
	grosimerigla	= DIMENSION
	voffset	= DIMENSION
	offsetframe	= DIMENSION
	offsetstanga	= da nu standard DIMENSION
	offsetdreapta	= da nu standard DIMENSION
	offsetsets	= mic mediu mare linie DIMENSION
	offsetjos	= mic mediu mare linie DIMENSION
	stil	= STYLE BEFEHL
	culoare	= COLOR

```

1  NAME
2  inainte  = BEFEHL
   dupa     = BEFEHL
   factor   = NUMMER

```

```

1  NAME
2  latime  =  DIMENSION
   stil    =  STYLE BEFEHL
   culoare =  COLOR

```

```

1  NAME                                OPT
2  rigla = NAME
   note = NAME
   n     = * NUMMER
   gol   = da nu niciunul numar

```

```

1  NAME                                OPT
2  locatie = stanga centru dreapta
   inherits: \seteazainconjurat

```

```

1  NAME
2  define      = da nu
   stil        = STYLE BEFEHL
   culoare     = COLOR
   language    = SPRACHE
   vector      = NAME
   inainte     = BEFEHL
   dupa        = BEFEHL
   stanga      = BEFEHL
   dreapta     = BEFEHL

```

```

\setuptweakedfont    [...1,...]    [...2...,...]
1  NAME
2  stil      =  STYLE BEFEHL
   scala    =  NUMMER
   xscala   =  NUMMER
   yscala   =  NUMMER
   xoffset  =  DIMENSION
   yoffset  =  DIMENSION

```

```

\setupunit      [,...1,...]   [...,...2,...]
1  NAME          OPT
2  metoda        = 1 2 3 4 5 6
   language      = SPRACHE
   alternativ     = text matematica
   order         = reverse normal
   separator     = mic mediu mare normal niciunul NAME
   spatiu        = mic mediu mare normal niciunul NAME
   stil          = STYLE BEFEHL
   culoare       = COLOR
   optiune       = mentine

```

```

\setupuserdata    [...1,...]    [...2,...2,...]
1  NAME
2  inainte      = BEFEHL
   dupa        = BEFEHL
   aliniere    = inherits: \seteazaalinierea
   setups      = NAME
   stil        = STYLE BEFEHL
   culoare     = COLOR
   alternativ   = implicit NAME
   KEY         = VALUE

```

```
\setupuserdataalternative  [...1...]  [...2...]
1 NAME                      OPT
2 renderingsetup = NAME
   KEY           = VALUE
```

```
\setupuserpagenumber    [...,.*=..,..]
*  viewerprefix = TEXT
   stare        = start stop niciunul mentine gol
   eticheta     = TEXT
   inherits: \setupcounter
```

```
\setupversion    [...]
*   concept fisier temporar final NAME
```

```

\setupverticalbox      [...,1...]      [...,...2...]
1  NAME                OPT                OPT
2  latime              = local DIMENSION
   inaltime            = max DIMENSION
   directie            = normal reverse lefttoright righttleft
   xoffset              = DIMENSION
   yoffset             = DIMENSION
   stil                = STYLE BEFEHL
   culoare             = COLOR
   sus                 = BEFEHL
   jos                 = BEFEHL
   strut               = da nu
   aliniere            = inherits: \setezaaalinierea
   aliniat             = inherits: \setezaaaliniat

```

```
\setupviewerlayer      [...,*=...,...]
*   titlu       = TEXT
    stare       = start stop
    export      = da nu
    tiparibil   = da nu
    scop        = local global
    metoda      = niciunul comanda
```

```
\setupvspacing [...]
* inherits: \vspacing OPT
```

<pre> \setupwithargument {...} {...} 1 NAME 2 CONTENT </pre>
<pre> \setupwithargumentswapped {...} {...} 1 CONTENT 2 NAME </pre>
<pre> \setupxml [...,...[*]...,...] * implicit = ascuns niciunul text compress = da nu entities = da nu </pre>
<pre> \setupxtable [...,¹...] [...,²...,...] 1 NAME 2 NAME latimetext = DIMENSION local fonttext = inherits: \seteazafonttext spaceinbetween = inherits: \blanc optiune = tight max dilatat latime inaltime fixat inalimetext = DIMENSION latimemaxima = DIMENSION distantacoloane = DIMENSION distantamarginestanga = DIMENSION distantamarginedreapta = DIMENSION antet = repetat subsol = repetat grosimerigla = DIMENSION split = da nu repetat auto splitoffset = DIMENSION aceeasipagina = inainte dupa ambele distanta = DIMENSION aliniazacaracter = da nu alignmentleftsample = TEXT alignmentrightsample = TEXT alignmentleftwidth = DIMENSION alignmentrightwidth = DIMENSION alierecaracter = TEXT inherits: \seteazainconjurat </pre>
<pre> \setuvalue {...} {...} 1 NAME 2 CONTENT </pre>
<pre> \setuxvalue {...} {...} 1 NAME 2 CONTENT </pre>
<pre> \setvalue {...} {...} 1 NAME 2 CONTENT </pre>
<pre> \setvariable {...} {...} {...} 1 NAME 2 KEY 3 VALUE </pre>
<pre> \setvariables [...]¹ [...,²...,...] 1 NAME 2 set = BEFEHL reset = BEFEHL KEY = VALUE </pre>
<pre> \setvboxregister ¹... {...} 1 CSNAME NUMBER 2 CONTENT </pre>
<pre> \setvisualizerfont [...][*] * FONT OPT </pre>

\setvtopregister ¹ ... { ² ...} 1 CSNAME NUMBER 2 CONTENT
\setwidthof ¹ ... \to \ ² ... 1 TEXT 2 CSNAME
\setxmeasure { ¹ ...} { ² ...} 1 NAME 2 DIMENSION
\setxvalue { ¹ ...} { ² ...} 1 NAME 2 CONTENT
\setxvariable { ¹ ...} { ² ...} { ³ ...} 1 NAME 2 KEY 3 VALUE
\setxvariables [¹ ...] [² ...,... ² ...,...] 1 NAME 2 set = BEFEHL reset = BEFEHL KEY = VALUE
\SHADOW { [*] ...} * CONTENT instances: shadowed
\shadowed { [*] ...} * CONTENT
\shapecorrection [[*] ...] * stanga dreapta ambele
\shapedhbox { [*] ...} * CONTENT
\shiftbox { ¹ ...} 1 CONTENT
\SHIFT { [*] ...} * CONTENT instances: shiftup shiftdown
\shiftdown { [*] ...} * CONTENT
\shiftup { [*] ...} * CONTENT
\showallmakeup
\showattributes
\showbalancepoints [[*] ...,... [*] ...,...] * inherits: \seteazacoloane OPT

\showboxes
\showbreakpoints [...,.. [*] ...,...] * inherits: \seteazacoloane OPT
\showbtxdatasetauthors [...,.. [*] ...,...] * specification = NAME OPT dataset = NAME field = address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME
\showbtxdatasetauthors [...*] * NAME OPT
\showbtxdatasetcompleteness [...,.. [*] ...,...] * specification = NAME OPT dataset = NAME field = address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME
\showbtxdatasetcompleteness [...*] * NAME OPT
\showbtxdatasetfields [...,.. [*] ...,...] * specification = NAME OPT dataset = NAME field = address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME
\showbtxdatasetfields [...*] * NAME OPT
\showbtxfields [...,.. [*] ...,...] * rotatie = NUMMER OPT specification = NAME
\showbtxfields [...*] * NAME OPT
\showbtxhashedauthors [...*] * TEXT OPT
\showbtxtables [...*] * TEXT OPT
\showchardata {...} * TEXT
\showcharfreq
\showcharratio {...} * TEXT
\showcolorbar [...*] * COLOR

\showcolorcomponents [...] * COLOR
\showcolorset [...] * COLOR
\showcolorstruts
\showcounter [...] * NAME
\showcurrentfont [...] * NUMMER OPT
\showdirectives
\showdirsmargin
\showdebuginfo
\showexperiments
\showfont [...] ¹ [..., ² ...] 1 FONT OPT 2 NUMMER
\showfontdata
\showfontexpansion
\showfontitalics
\showfontkerns
\showfontparameters
\showfontstrip [...*...] * inherits: \seteazafonttext
\showfontstyle [..., ¹ ...] [..., ² ...] [..., ³ ...] [..., ⁴ ...] 1 inherits: \seteazafonttext OPT OPT OPT 2 rm ss tt mm hw cg 3 tf bf it sl bi bs 4 tot NUMMER
\showglyphdata
\showglyphs
\showgridsnapping
\showhelp {...} ¹ [...] ² 1 TEXT 2 REFERENCE

\showparwrapperstate {...} * NAME
\showraggedrules {...} * NUMMER
\showrivers [...,.. ^{OPT} ...,...] * inherits: \addriversto box
\showsetupsdefinition {...} * NAME
\showtimer {...} * TEXT
\showtokens [...] * NAME
\showtrackers
\showvalue {...} * NAME
\showvariable {... ¹ } {... ² } 1 NAME 2 KEY
\showwarning {... ¹ } {... ² } {..., ³ ...} 1 NAME 2 NAME NUMMER 3 TEXT
\signalcharacteralign {... ¹ } {... ² } 1 NUMMER 2 NUMMER
\signalrightpage
\simbol [... ¹] [... ²] 1 NAME OPT 2 NAME
\simbol {...} * NAME
\similartokens {... ¹ } {... ² } 1 TEXT 2 TEXT
\simplealignedbox {... ¹ } {... ² } {... ³ } 1 DIMENSION 2 stanga dreapta centru flushleft flushright intern extern 3 CONTENT
\simplealignedboxplus {... ¹ } {... ² } {... ³ } {... ⁴ } 1 DIMENSION 2 stanga dreapta centru flushleft flushright intern extern 3 TEXT 4 CONTENT

$\backslash\text{simplealignedspreadbox}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ 1 DIMENSION 2 stanga dreapta centru flushleft flushright intern extern 3 CONTENT
$\backslash\text{simplegroupedcommand}$ $\{.^1.\}$ $\{.^2.\}$ 1 BEFEHL 2 BEFEHL
$\backslash\text{simplegroupedcommandcs}$ $\backslash.^1.$ $\backslash.^2.$ 1 CSNAME 2 CSNAME
$\backslash\text{simplereversealignedbox}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ 1 DIMENSION 2 stanga dreapta centru flushleft flushright intern extern 3 CONTENT
$\backslash\text{simplereversealignedboxplus}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ $\{.^4.\}$ 1 DIMENSION 2 stanga dreapta centru flushleft flushright intern extern 3 TEXT 4 CONTENT
$\backslash\text{SYNCHRONIZE}$ $[.^1.^2.^3.^4.^5.^6.^7.^8.^9.^{10}.]$ $\{.^2.\}$ $\{.^3.\}$ 1 inherits: $\backslash\text{setupsynchr}$ ^{OFF} _{size} 2 CONTENT 3 CONTENT instances: paralleltext
$\backslash\text{paralleltext}$ $[.^1.^2.^3.^4.^5.^6.^7.^8.^9.^{10}.]$ $\{.^2.\}$ $\{.^3.\}$ 1 inherits: $\backslash\text{setupsynchr}$ ^{OFF} _{size} 2 CONTENT 3 CONTENT
$\backslash\text{singlebond}$
$\backslash\text{sixthofsixarguments}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ $\{.^4.\}$ $\{.^5.\}$ $\{.^6.\}$ 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT
$\backslash\text{skiphere}$ $[.^*.]$ * + - DIMENSION NUMBER pagina aceeasipagina
$\backslash\text{slantedface}$
$\backslash\text{slashed}$ $[.^1.]$ $\{.^2.\}$ 1 tot begin end ^{OFF} unset ordinary operator binary relation open close punctuation variable active intern under over fraction radical centru prime accent fenced ghost vcenter explicit imaginary differential exponential integral ellipsis function digit division factorial wrapped construct dimension unary textpunctuation unspaced experimental fake numbergroup continuation 2 CONTENT

\slicepages	[¹ .]	[² .,... ² .,...]	[³ .,... ³ .,...]
		OPT	OPT
1	FILE		
2	offset = DIMENSION		
	hoffset = DIMENSION		
	voffset = DIMENSION		
	latime = DIMENSION		
	inaltime = DIMENSION		
	n = NUMBER		
3	offset = DIMENSION		
	hoffset = DIMENSION		
	voffset = DIMENSION		
	latime = DIMENSION		
	inaltime = DIMENSION		
	n = NUMBER		

```
\slovenianNumerals    {...}
*    NUMMER
```

```
\sloveniannumerals    {...}
*   NUMMER
```

`\smallbodyfont`

\smallbreak

```
\smallcappedcharacters    {...}
*   NUMMER
```

```
\smallcappedromannumerals    {...}
*    NUMMER
```

\smaller

\smallinfofont

\smallinfontbold

`\smallmathsymbol` `{...}`
* TEXT

\smallskip

```
\smash [..1.] {..2.}
```

```
1 w h d t bOPT
```

```
2 CONTENT
```

`\smashbox` `...`
* CSNAME NUMMER

```
\smashboxed ...
* CSNAME NUMMER
```

<code>\smashedhbox</code>	¹ <code>...</code>	² <code>{...}</code>
1 <code>TEXT</code>	<code>OPT</code>	
2 <code>CONTENT</code>		

<code>\smashedvbox</code>	¹ <code>...</code>	² <code>{...}</code>
<code>1 TEXT</code>	<code>OPT</code>	
<code>2 CONTENT</code>		

<code>\snappedmath {...}</code> <code>* CONTENT</code>
<code>\snaptogrid [...¹] \...² {...³}</code> 1 normal standard df strict tolerant sus subsol ambele broad ajustat primul ultim inalt unu jos niciunul linie strut box min max centru math math:linie math:jumatatelinie math:-line math:-halfline NAME 2 CSNAME 3 CONTENT
<code>\snaptogrid [...¹,...] \...² {...³}</code> 1 inherits: \definegridsnapping 2 CSNAME 3 CONTENT
<code>\someheadnumber [...¹] [...²]</code> 1 ABSCHNITT 2 precedent curent urmatorul primul ultim
<code>\somekindoftab [...,[*]...,...]</code> <code>* alternativ = orizontal vertical</code> <code>latime = DIMENSION</code> <code>inaltime = DIMENSION</code> <code>n = NUMMER</code> <code>m = NUMMER</code>
<code>\somalocalfloat</code>
<code>\somenamedheadnumber {...¹} {...²}</code> 1 ABSCHNITT 2 precedent curent urmatorul primul ultim
<code>\someplace {...¹} {...²} {...³} {...⁴} {...⁵} [...⁶]</code> 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 REFERENCE
<code>\SORTING [...¹] {...²}</code> 1 NAME OPT 2 CONTENT instances: logo
<code>\logo [...¹] {...²}</code> 1 NAME OPT 2 CONTENT
<code>\spaceddigits {...}</code> <code>* NUMMER</code>
<code>\spaceddigitmethod</code>
<code>\spaceddigitseparator</code>
<code>\spaceddigitssymbol</code>
<code>\spaceorpar</code>
<code>\spanishNumerals {...}</code> <code>* NUMMER</code>

\spanishnumerals {...} * NUMBER
\spatiifixate
\spatiu
\spatiualb
\spatiufixat
\splitatasterisk ... \... \... 1 TEXT 2 CSNAME 3 CSNAME
\splitatcolon ... \... \... 1 TEXT 2 CSNAME 3 CSNAME
\splitatcolons ... \... \... 1 TEXT 2 CSNAME 3 CSNAME
\splitatcomma ... \... \... 1 TEXT 2 CSNAME 3 CSNAME
\splitatperiod ... \... \... 1 TEXT 2 CSNAME 3 CSNAME
\splitfilename {...} * FILE
\splitoffbase
\splitofffull
\splitoffkind
\splitoffname
\splitoffpath
\splitoffroot
\splitofftokens ... \from ... \to \... 1 TEXT 2 TEXT 3 CSNAME
\splitofftype

$$\backslash\mathrm{splitsequence} \quad \{.\overset{1}{.}\} \quad \{.\overset{2}{.}\}$$

```

1  da nu TEXT
2  TEXT

```

```
\splitstring ... \at ... \to \... \and \...
```

1	TEXT
2	TEXT
3	CSNAME
4	CSNAME

$$\backslash splitsymbol \quad \{...\}$$

* da nu TEXT

`\spreadhbox` . . .

* CSNAME NUMMER

`\stacking` $[...]$ $\{...\}$

1	NUMMER
2	CONTENT

`\STACKING` $[\dots]$ $\{ \dots \}$

1	NUMMER
2	CONTENT

$$\backslash\mathrm{stackrel{rel}}{\quad}\quad\{\dots\}^1\quad\{\dots\}^2$$

1 CONTENT
2 CONTENT

\stackscripts

\stanga ...

* \{ \[\langle \backslash bgroup \lparent \lparenthesis \lparen \lbracket \lbrack \lbrace \lceil \lceiling \lfloor floor \ulcorner
\llcorner \lmoustache \lbracket \langle \llangle \lgrouper \vert \singleverticalbar \doubleverticalbar \tripleverticalbar
\lvert \lVert \linterval \llointerval CHARACTER

`\start [...] ... \stop`

* NAME	OPT
--------	-----

$$\backslash\mathrm{startalignment} \quad [\ldots,*;\ldots] \quad \ldots \quad \backslash\mathrm{stopalignment}$$

```
* inherits: \seteazaalinierea
```

\startaliniatcentru ... \stopaliniatcentru

\startaliniatdreapta ... \stopaliniatdreapta

\startaliniatstanga ... \stopaliniatstanga

`\startallmodes` `[...,*,...]` ... `\stopallmodes`

* NAME

$$\backslash\mathrm{startalternate} \quad [\dots, \dots^* = \dots, \dots] \quad \dots \quad \backslash\mathrm{stopalternate}$$

```
* text = TEXT
```

`\startanchoring ... \stopanchoring`

`\startantettabel` [...] ... `\stopantettabel`

* NAME

`\startasciimode ... \stopasciimode`

<pre> \startATTACHMENT [¹...] [_{OPT},...²...,...] ... \stopATTACHMENT 1 NAME 2 inherits: \setupattachment instances: attachment </pre>
<pre> \startattachment [¹...] [_{OPT},...²...,...] ... \stopattachment 1 NAME 2 inherits: \setupattachment </pre>
<pre> \startbalancing [¹...] [_{OPT},...²...,...] ... \stopbalancing 1 NAME 2 NUMMER </pre>
<pre> \startbar [...] ... \stopbar * NAME </pre>
<pre> \startbbordermatrix ... \stopbbordermatrix </pre>
<pre> \startbitmapimage [...,...[*]...,...] ... \stopbitmapimage * culoare = rgb cmyk gri latime = DIMENSION inaltime = DIMENSION x = NUMMER y = NUMMER </pre>
<pre> \startbleeding [¹...] [_{OPT},...²...,...] ... \stopbleeding 1 NAME 2 inherits: \setupbleeding </pre>
<pre> \startblocsectioneambient [...] ... \stopblocsectioneambient * NAME </pre>
<pre> \startbordermatrix ... \stopbordermatrix </pre>
<pre> \startboxanchoring [...] ... \stopboxanchoring * + NAME </pre>
<pre> \startboxexport [...,...[*]...,...] ... \stopboxexport * inherits: \setupboxexport _{OPT} </pre>
<pre> \startbtxrenderingdefinitions [...] ... \stopbtxrenderingdefinitions * NAME </pre>
<pre> \startbuffer [...] ... \stopbuffer * NAME _{OPT} </pre>
<pre> \startBUFFER ... \stopBUFFER instances: hiding </pre>
<pre> \starthiding ... \stophiding </pre>
<pre> \startcatcodetable *... ... \stopcatcodetable * CSNAME </pre>
<pre> \startcenteraligned ... \stopcenteraligned </pre>
<pre> \startcharacteralign [...,...[*]...,...] ... \stopcharacteralign * inherits: \setupcharacteralign </pre>

<code>\startcharacteralign [...] ... \stopcharacteralign</code> <code>* TEXT number->TEXT text->TEXT^{OPT}</code>
<code>\startcharacterable [...] ... \stopcharacterable</code> <code>* NAME</code>
<code>\startcheckedfences ... \stopcheckedfences</code>
<code>\startchemical [¹...] [...,²...,...] ... \stopchemical</code> <code>1 NAME OPT OPT</code> <code>2 inherits: \setupchemical</code>
<code>\startchemicalformula ... \stopchemicalformula</code>
<code>\startchemistry [...,[*]...,...] ... \stopchemistry</code> <code>* inherits: \setupchemistry^{OPT}</code>
<code>\startclipect ... \stopclipect</code>
<code>\startclipframed [...,[*]...,...] ... \stopclipframed</code> <code>* inherits: \seteazainconjurat^{OPT}</code>
<code>\startcollect ... \stopcollect</code>
<code>\startcollecting ... \stopcollecting</code>
<code>\startcolorintent [...] ... \stopcolorintent</code> <code>* knockout overprint niciumul</code>
<code>\startcoloronly [...] ... \stopcoloronly</code> <code>* COLOR</code>
<code>\startcolorset [...] ... \stopcolorset</code> <code>* NAME</code>
<code>\startcolumnset [¹...] [...,²...,...] ... \stopcolumnset</code> <code>1 NAME OPT</code> <code>2 inherits: \setupcolumnset</code>
<code>\startcolumnsethspan {¹...} {²...} ... \stopcolumnsethspan</code> <code>1 NUMMER</code> <code>2 NUMMER</code>
<code>\startcolumnsetsheet [¹] [²] [³] ... \stopcolumnsetsheet</code> <code>1 NAME OPT OPT</code> <code>2 NUMMER</code> <code>3 pagina</code>
<code>\startcolumnsetsheetdelayed [¹] [²] ... \stopcolumnsetsheetdelayed</code> <code>1 NAME OPT</code> <code>2 NUMMER</code>
<code>\startcolumnsetspan [¹] [...,²...,...] ... \stopcolumnsetspan</code> <code>1 NAME OPT</code> <code>2 inherits: \setcolumnset</code>
<code>\startcolumnsetspanwidth {[*]...} ... \stopcolumnsetspanwidth</code> <code>* NUMMER</code>

$$\backslash\mathrm{startcolumnsetspreadsheets} \quad [^1] \quad [^2] \quad \dots \quad \backslash\mathrm{stopcolumnsetspreadsheets}$$

1	NAME
2	NUMMER

```
\startCOLUMNSET    [...,*...] ... \stopCOLUMNSET
```

```
* inherits: \setupcolumnset OPT
```

$$\backslash \text{startcombination} \quad [\dots] \quad [\dots, \dots \stackrel{2}{=} \dots, \dots] \quad \dots \quad \backslash \text{stopcombination}$$
[illegible]

```
\startcombination    [...]1    [...]2 ... \stopcombination
```

```
1  NAME
2  N*M
```

\startcomentariupagina ... \stopcomentariupagina

$$\backslash\text{startCOMMENT} \quad [\dots] \quad [\dots, \dots \stackrel{2}{=} \dots, \dots] \quad \dots \quad \backslash\text{stopCOMMENT}$$

```
1  TEXT                                OPT
2  inherits: \seteazacomentariu
instances: comment
```

`\startcomment` [...]¹ [...,...²,...] ... `\stopcomment`

[illegible]

`\startcomparingtext` [...] ... `\stopcomparingtext`

```
* reset NAME
```

$$\backslash\mathrm{startcomponenta} \quad [\dots] \quad \dots \quad \backslash\mathrm{stopcomponenta}$$

* FILE *

$$\backslash\mathrm{startcomponent}_a \quad \dots \quad \backslash\mathrm{stopcomponent}_a$$

* FILE *

`\startcontextcode ... \stopcontextcode`

```
\startcontextdefinitioncode ... \stopcontextdefinitioncode
```

```
\startctxfunction    ...    \stopctxfunction
```

* NAME

```
\startctxfunctiondefinition    ... .. \stopctxfunctiondefinition
```

* NAME

\startculoare [...] ... \stopculoare

* COLOR

`\startcurrentcolor ... \stopcurrentcolor`

```
\startcurrentlistentrywrapper ... \stopcurrentlistentrywrapper
```

```
\startdelimited  [...]  [...]  [..., ...] ... \stopdelimited
```

```
1  NAME
2  SPRACHE
3  inherits: \startingust
```


$\backslash$ startEFFECT ... $\backslash$ stopEFFECT
$\backslash$ startelement [... [*] ...] ... $\backslash$ stopelement [*] REFERENCE ^{OPT}
$\backslash$ startembeddedxtable [... [*] =...,...] ... $\backslash$ stopembeddedxtable [*] inherits: $\backslash$ setupxtable ^{OPT}
$\backslash$ startembeddedxtable [... [*]] ... $\backslash$ stopembeddedxtable [*] NAME ^{OPT}
$\backslash$ startENUMERARE [... [*] =...,...] ... $\backslash$ stopENUMERARE [*] titlu = TEXT ^{OPT} [*] semncarte = TEXT [*] lista = TEXT [*] referinta = REFERENCE [*] referencetext = TEXT
$\backslash$ startENUMERARE [... ¹ ...] {.. ² .} ... $\backslash$ stopENUMERARE ¹ REFERENCE ^{OPT} ^{OPT} ² TEXT
$\backslash$ startexceptions [... [*]] ... $\backslash$ stopexceptions [*] SPRACHE ^{OPT}
$\backslash$ startexpanded ... $\backslash$ stopexpanded
$\backslash$ startexpandedcollect ... $\backslash$ stopexpandedcollect
$\backslash$ startextendedcatcodetable \.* ... $\backslash$ stopextendedcatcodetable [*] CSNAME
$\backslash$ startexternalfigurecollection [... [*]] ... $\backslash$ stopexternalfigurecollection [*] NAME
$\backslash$ startfacingfloat [... [*]] ... $\backslash$ stopfacingfloat [*] NAME
$\backslash$ startfigura [... ¹] [... ²] [... ³ =...,...] ... $\backslash$ stopfigura ¹ NAME ^{OPT} ² FILE ³ inherits: $\backslash$ figuraexterna
$\backslash$ startfittingpage [... ¹] [... ² =...,...] ... $\backslash$ stopfittingpage ¹ NAME ^{OPT} ² inherits: $\backslash$ setupfittingpage
$\backslash$ startFITTINGPAGE [... [*] =...,...] ... $\backslash$ stopFITTINGPAGE [*] inherits: $\backslash$ setupfittingpage ^{OPT} instances: TEXpage MPpage
$\backslash$ startMPpage [... [*] =...,...] ... $\backslash$ stopMPpage [*] inherits: $\backslash$ setupfittingpage ^{OPT}
$\backslash$ startTEXpage [... [*] =...,...] ... $\backslash$ stopTEXpage [*] inherits: $\backslash$ setupfittingpage
$\backslash$ startfixat [... [*]] ... $\backslash$ stopfixat [*] jos centru inalt ^{OPT} tohi implicit

```
* inherits: \setupcombination
```

* N*M NAME

```

1 split keepERTtogether totdeERTuna stanga dreapta intern extern spatiusERTspate cutspace instanga indreapta inmargine
marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus
reset inalttime adancime [--]linie jumataERTtelinie grila inalt jos ajustat tight tolerant foartetolerant 90 180 270
nnumber niciunul local aici fortat margine [--]suspenda suspendat inalt ambele centru offset sos subsol auto
pagina paginastanga paginadreapta paragraf undeva effective antet subsol tblr lrtb tblr lrtb fxtb btblr lrbt btblr
rlbt fxbt fixd append
2 REFERENCE
3 TEXT

```

```

1 split keep together totdeaunaOPT stanga dreaptaOPT intern extern spatiuspace cutspace instanga indreapta in margine
marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus
reset inalttime adancime [--]linie jumatatelinie grila inalt jos ajustat tight tolerant foartetolerant 90 180 270
nnumber niciunul local aici fortat margine [--]suspenda suspendat inalt ambele centru offset sos subsol auto
pagina paginastanga paginadreapta paragraf undeva effective antet subsol tblr lrtb tblr lrtb fxtb btblr lrtb btblr
rlbt fxbt fixd append
2 REFERENCE
3 TEXT

```

```

1 split keep together tot deada PTstanga dreapta PTintern extern spatius pate cutspace instanga indreapta in margine
marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus
reset inalttime adancime [--]linie jumatatelinie grila inalt jos ajustat tight tolerant foartetolerant 90 180 270
numnumber niciunul local aici fortat margine [--]suspenda suspendant inalt ambele centru offset sos subsol auto
pagina paginastanga paginadreapta paragraf undeva effective antet subsol tblr lrtb tblr lrtb fxtb btblr lrbt btblr
rlbt fxbt fixd append
2 REFERENCE
3 TEXT

```

```

1 split keep together totdeaunaOPT stanga dreaptaOPT intern extern spatiuspace cutspace instanga indreapta inmargin
marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus
reset inalttime adancime [--]linie jumatatelinie grila inalt jos ajustat tight tolerant foartetolerant 90 180 270
nnumber niciunul local aici fortat margine [--]suspenda suspendat inalt ambele centru offset sos subsol auto
pagina paginastanga paginadreapta paragraf undeva effective antet subsol tblr lrtb tblr lrtb fxtb btlr lrbt btlr
rlbt fxbt fixd append
2 REFERENCE
3 TEXT

```

```

1 split keeptogether totdeauna stnga dreapta intrn extern spatiusspate cutspace instanga indreapta inmargine
marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus
reset inalttime adancime [--]linie jumatatelinie grila inalt jos ajustat tight tolerant foartetolerant 90 180 270
nnumber niciunul local aici fortat margine [--]suspenda suspendat inalt ambele centru offset sos subsol auto
pagina paginastanga paginadreapta paragraf undeva effective antet subsol tblr lrtb tblr lrtb fxtb btlr lrbt btlr
rlbt fxbt fixd append
2 REFERENCE
3 TEXT

```

```

1 split keep together totdeERTuna stanga dreapta intern extern spatiusERTspace cutspace instanga indreapta inmarginERT
marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus
reset inalttime adancime [--]linie jumatatelinie grila inalt jos ajustat tight tolerant foartetolerant 90 180 270
numnumber niciunul local aici fortat margine [--]suspenda suspendat inalt ambele centru offset --s subsol auto
pagina paginastanga paginadreapta paragraf undeva effective antet subsol tblr lrtb tblr lrtb fxtb btblr lrbt btblr
rlbt fxbt fixd append
2 REFERENCE
3 TEXT

```

* FONT

$\backslash\text{startfontclass}$ [...] ... $\backslash\text{stopfontclass}$ * fiecare NAME
$\backslash\text{startfontsolution}$ [...] ... $\backslash\text{stopfontsolution}$ * NAME
$\backslash\text{startformula}$ [...,*,...] ... $\backslash\text{stopformula}$ * $\text{impachetat tight centru adancime}^{\text{OPT}} \text{linie jumatatelinie -linie -jumatatelinie incadrat mic DIMENSION}$
$\backslash\text{startformulacombination}$ [...,*=*,...] ... $\backslash\text{stopformulacombination}$ * $\text{inherits: } \backslash\text{setupcombination}^{\text{OPT}}$
$\backslash\text{startformulacombination}$ [...] ... $\backslash\text{stopformulacombination}$ * $N * M^{\text{OPT}}$
$\backslash\text{startformula}$ [...,*=*,...] ... $\backslash\text{stopformula}$ * $\text{inherits: } \backslash\text{seteazaformule}^{\text{OPT}}$
$\backslash\text{startFORMULAformula}$ [...,*,...] ... $\backslash\text{stopFORMULAformula}$ * $\text{impachetat tight centru adancime}^{\text{OPT}} \text{linie jumatatelinie -linie -jumatatelinie incadrat mic DIMENSION}$ instances: sp sd mp md
$\backslash\text{startFORMULAformula}$ [...,*=*,...] ... $\backslash\text{stopFORMULAformula}$ * $\text{inherits: } \backslash\text{seteazaformule}^{\text{OPT}}$ instances: sp sd mp md
$\backslash\text{startmdformula}$ [...,*=*,...] ... $\backslash\text{stopmdformula}$ * $\text{inherits: } \backslash\text{seteazaformule}^{\text{OPT}}$
$\backslash\text{startmpformula}$ [...,*=*,...] ... $\backslash\text{stopmpformula}$ * $\text{inherits: } \backslash\text{seteazaformule}^{\text{OPT}}$
$\backslash\text{startsdformula}$ [...,*=*,...] ... $\backslash\text{stopsdformula}$ * $\text{inherits: } \backslash\text{seteazaformule}^{\text{OPT}}$
$\backslash\text{startspformula}$ [...,*=*,...] ... $\backslash\text{stopspformula}$ * $\text{inherits: } \backslash\text{seteazaformule}^{\text{OPT}}$
$\backslash\text{startmdformula}$ [...,*,...] ... $\backslash\text{stopmdformula}$ * $\text{impachetat tight centru adancime}^{\text{OPT}} \text{linie jumatatelinie -linie -jumatatelinie incadrat mic DIMENSION}$
$\backslash\text{startmpformula}$ [...,*,...] ... $\backslash\text{stopmpformula}$ * $\text{impachetat tight centru adancime}^{\text{OPT}} \text{linie jumatatelinie -linie -jumatatelinie incadrat mic DIMENSION}$
$\backslash\text{startsdformula}$ [...,*,...] ... $\backslash\text{stopsdformula}$ * $\text{impachetat tight centru adancime}^{\text{OPT}} \text{linie jumatatelinie -linie -jumatatelinie incadrat mic DIMENSION}$
$\backslash\text{startspformula}$ [...,*,...] ... $\backslash\text{stopspformula}$ * $\text{impachetat tight centru adancime}^{\text{OPT}} \text{linie jumatatelinie -linie -jumatatelinie incadrat mic DIMENSION}$
$\backslash\text{startformule}$ [...,*,...] ... $\backslash\text{stopformule}$ * + - REFERENCE ^{OPT}
$\backslash\text{startframed}$ [¹ ...] [² *,...] ... $\backslash\text{stopframed}$ 1 NAME ^{OPT} 2 $\text{inherits: } \backslash\text{seteazainconjurat}^{\text{OPT}}$

<code>\startframedcell</code> [...,.. [*] ...,...] ... <code>\stopframedcell</code> * inherits: \seteazainconjurat ^{OPT}
<code>\startframedcontent</code> [...] ... <code>\stopframedcontent</code> * NAME dezactivat ^{OPT}
<code>\startframedrow</code> [...,.. [*] ...,...] ... <code>\stopframedrow</code> * inherits: \seteazainconjurat ^{OPT}
<code>\startframedtable</code> [¹ ...] [...,.. ² ...,...] ... <code>\stopframedtable</code> 1 NAME ^{OPT} ^{OPT} 2 inherits: \seteazainconjurat
<code>\startfundal</code> [...,.. [*] ...,...] ... <code>\stopfundal</code> * inherits: \seteazafundal ^{OPT}
<code>\startFUNDAL</code> [...,.. [*] ...,...] ... <code>\stopFUNDAL</code> * inherits: \seteazafundal ^{OPT} instances: fundal
<code>\startgraphicgroup</code> ... <code>\stopgraphicgroup</code>
<code>\startgridcorrection</code> [...] ... <code>\stopgridcorrection</code> * reset [+~]T [+~]L [+~]H [+~] ^{OPT} [+~]Z [+~]I
<code>\startgridsnapping</code> [...] ... <code>\stopgridsnapping</code> * normal standard da strict ^{OPT} tolerant sus subsol ambele broad ajustat primul ultim inalt unu jos niciunul linie strut box min max centru math math:linie math:jumatatelinie math:-line math:-halfline NAME
<code>\startgridsnapping</code> [..., [*] ...] ... <code>\stopgridsnapping</code> * inherits: \definegridsnapping ^{OPT}
<code>\starthangrange</code> ... <code>\stophangrange</code>
<code>\starthangrangestep</code> ... <code>\stophangrangestep</code>
<code>\starthboxestohbox</code> ... <code>\stophboxestohbox</code>
<code>\starthboxregister</code> [*] <code>\stophboxregister</code> * CSNAME NUMBER
<code>\starthHELP</code> [...] ... <code>\stopHELP</code> * REFERENCE ^{OPT} instances: helptext
<code>\starthelptext</code> [...] ... <code>\stophelptext</code> * REFERENCE ^{OPT}
<code>\starthiddencontent</code> ... <code>\stophiddencontent</code>
<code>\starthhighlight</code> [...] ... <code>\stophighlight</code> * NAME
<code>\starthorizontalbox</code> [¹ ...] [...,.. ² ...,...] ... <code>\stophorizontalbox</code> 1 NAME ^{OPT} ^{OPT} 2 inherits: \setuphorizontalbox

<code>\starthyphenation</code> [...] ... <code>\stopthyphenation</code> * original tex implicit hyphenate expanded traditional niciunul
<code>\startimage</code> [...,..[*]...,...] ... <code>\stopimage</code> * descriptiontext = TEXT alternativetext = TEXT
<code>\startimath</code> ... <code>\stopimath</code>
<code>\startimpachetat</code> [...[*]...] ... <code>\stopimpachetat</code> * blank OPT
<code>\startindentedtext</code> [...[*]...] ... <code>\stopindentedtext</code> * NAME
<code>\startINDENTEDTEXT</code> ... <code>\stopINDENTEDTEXT</code>
<code>\startingust</code> [...¹...] [...,..²...,...] ... <code>\stoppingust</code> 1 NAME OPT OPT 2 inherits: \seteazaingust
<code>\startingust</code> [...,..¹...,...] [...,..²...,...] ... <code>\stoppingust</code> 1 inherits: \seteazaingust^{OPT} OPT 2 [-+]stanga [-+]centru [-+]dreapta NUMBER*stanga NUMBER*centru NUMBER*dreapta reset reverse
<code>\startingust</code> [...¹...] [...,..²...,...] ... <code>\stoppingust</code> 1 NAME OPT OPT 2 [-+]stanga [-+]centru [-+]dreapta NUMBER*stanga NUMBER*centru NUMBER*dreapta reset reverse
<code>\startinstallaligncommand</code> [...[*]...] ... <code>\stopinstallaligncommand</code> * NAME
<code>\startinteractiune</code> [...[*]...] ... <code>\stopinteractiune</code> * ascuns NAME
<code>\startinterface</code> ...[*] ... <code>\stopinterface</code> * tot SPRACHE
<code>\startintertext</code> ... <code>\stopintertext</code>
<code>\startitemgroup</code> [...¹...] [...,..²...,...] [...,..³...,...] ... <code>\stopitemgroup</code> 1 NAME OPT OPT 2 inherits: \setupitemgroup 3 inherits: \setupitemgroup
<code>\startITEMGROUPtable</code> [...,..¹...,...] [...,..²...,...] ... <code>\stopITEMGROUPtable</code> 1 inherits: \setupitemgroup OPT OPT 2 inherits: \setupitemgroup instances: itemize
<code>\startitemizetable</code> [...,..¹...,...] [...,..²...,...] ... <code>\stopitemizetable</code> 1 inherits: \setupitemgroup OPT OPT 2 inherits: \setupitemgroup
<code>\startITEMGROUP</code> [...,..¹...,...] [...,..²...,...] ... <code>\stopITEMGROUP</code> 1 inherits: \setupitemgroup^{OPT} OPT 2 inherits: \setupitemgroup instances: itemize

<pre> \startitemize [...] [...] ... \stopitemize 1 inherits: \setupitemgroup^{OPT} 2 inherits: \setupitemgroup </pre>
<pre> \startJSCode [...] [...] [...] ... \stopJSCode 1 NAME 2 uses 3 NAME </pre>
<pre> \startJSreamble [...] [...] [...] ... \stopJSreamble 1 NAME 2 folosit 3 now later </pre>
<pre> \startknockout ... \stopknockout </pre>
<pre> \startlanguageoptions [...] ... \stoplanguageoptions * SPRACHE^{OPT} </pre>
<pre> \startlayout [...] ... \stoplayout * NAME </pre>
<pre> \startlimba [...] ... \stoplimba * SPRACHE </pre>
<pre> \startlinealignment [...] ... \stoplinealignment * stanga centru dreapta max </pre>
<pre> \startlinecorrection [..., ...] ... \stoplinecorrection * blank inherits: \blanc^{OPT} </pre>
<pre> \startlinefiller [...] [...] [...] ... \stoplinefiller 1 filler NAME^{OPT} 2 inherits: \setuplinefiller </pre>
<pre> \startLINENOTE [...] {...} 1 REFERENCE 2 TEXT instances: linenote </pre>
<pre> \startlinenote [...] {...} 1 REFERENCE 2 TEXT </pre>
<pre> \startlinenumbering [...] [...] [...] ... \stoplinenumbering 1 NAME^{OPT} 2 continua = da nu^{OPT} start = NUMMER pas = NUMMER metoda = pagina primul urmatorul </pre>
<pre> \startlinenumbering [...] [...] [...] ... \stoplinenumbering 1 NAME^{OPT} 2 continuu NUMMER^{OPT} </pre>
<pre> \startlinetable ... \stoplinetable </pre>
<pre> \startlinetablebody ... \stoplinetablebody </pre>

\startlinetablecell [...,.. [*] ...,...] ... \stoplinetablecell * inherits: \setuplinetable OPT
\startlinetablehead ... \stoplinetablehead
\startlinie [...] * REFERENCE
\startliniemargine [... [*]] ... \stopliniemargine * NUMBER OPT
\startliniemargine [...,.. [*] ...,...] ... \stopliniemargine * inherits: \setupmarginrule OPT
\startLINES [..... [*] ...,...] ... \stopLINES * inherits: \seteazalinfi ^{OPT} instances: lines
\startlines [..... [*] ...,...] ... \stoplines * inherits: \seteazalinfi ^{OPT}
\startlocalbox [... [*]] ... \stoplocalbox * NAME
\startlocalboxrange [... [*]] ... \stoplocalboxrange * NAME
\startlocalfootnotes ... \stoplocalfootnotes
\startlocalheadsetup ... \stoplocalheadsetup
\startlocallinecorrection [..., [*] ...] ... \stoplocallinecorrection * blank inherits: \blanc OPT
\startlocalnotes [..., [*] ...] ... \stoplocalnotes * NAME
\startlocalsetups [... [*]] ... \stoplocalsetups * NAME
\startlocalsetups .. [*] ... \stoplocalsetups * NAME
\startlua ... \stoptlua
\startluacode ... \stoptluacode
\startluaparameterset [... [*]] ... \stoptluaparameterset * NAME
\startluasetsups [... [*]] ... \stoptluasetsups * NAME
\startluasetsups .. [*] ... \stoptluasetsups * NAME

<pre> \startMPclip {...} ... \stopMPclip * NAME </pre>
<pre> \startMPcode {...} ... \stopMPcode * metafun minifun extrafun lessfun scaledfun doublefun binaryfun decimalfun positfun mprun metapost nofun scaledpost doublepost binarypost decimalpost simplefun </pre>
<pre> \startMPcode [...,..[*]...,...] ... \stopMPcode * instance = metafun minifun extrafun lessfun scaledfun doublefun binaryfun decimalfun metapost nofun scaledpost doublepost binarypost decimalpost simplefun stacking = TEXT descriptiontext = TEXT alternativetext = TEXT </pre>
<pre> \startMPdefinitions {...} ... \stopMPdefinitions * metafun minifun extrafun lessfun scaledfun doublefun binaryfun decimalfun positfun mprun metapost nofun scaledpost doublepost binarypost decimalpost simplefun </pre>
<pre> \startMPdrawing [...] ... \stopMPdrawing * - OPT </pre>
<pre> \startMPenvironment [...] ... \stopMPenvironment * reset global + OPT </pre>
<pre> \startMPextensions {...,*...} ... \stopMPextensions * metafun minifun extrafun lessfun scaledfun doublefun binaryfun decimalfun positfun mprun metapost nofun scaledpost doublepost binarypost decimalpost simplefun </pre>
<pre> \startMPimage [...,..[*]...,...] ... \stopMPimage * descriptiontext = TEXT^{OPT} alternativetext = TEXT </pre>
<pre> \startMPinclusions [...]¹ {...}² ... \stopMPinclusions 1 + OPT OPT 2 metafun minifun extrafun lessfun scaledfun doublefun binaryfun decimalfun positfun mprun metapost nofun scaledpost doublepost binarypost decimalpost simplefun </pre>
<pre> \startMPinitializations ... \stopMPinitializations </pre>
<pre> \startMPoverlaydata ... \stopMPoverlaydata </pre>
<pre> \startMPpositiongraphic {...} {...,²...} ... \stopMPpositiongraphic 1 NAME OPT 2 KEY </pre>
<pre> \startMPpositionmethod {...} ... \stopMPpositionmethod * NAME </pre>
<pre> \startMPrun {...} ... \stopMPrun * NAME OPT </pre>
<pre> \startmakeup [...]¹ [...,..²...,...] ... \stopmakeup 1 NAME OPT 2 inherits: \seteazamakeup </pre>
<pre> \startMAKEUPmakeup [...,..[*]...,...] ... \stopMAKEUPmakeup * inherits: \seteazamakeup^{OPT} instances: standard page text middle </pre>

$\backslash$ startmiddlemakeup [...,*...,...] ... $\backslash$ stopmiddlemakeup * inherits: \seteazamakeup OPT
$\backslash$ startpagemakeup [...,*...,...] ... $\backslash$ stoppagemakeup * inherits: \seteazamakeup OPT
$\backslash$ startstandardmakeup [...,*...,...] ... $\backslash$ stopstandardmakeup * inherits: \seteazamakeup OPT
$\backslash$ starttextmakeup [...,*...,...] ... $\backslash$ stoptextmakeup * inherits: \seteazamakeup OPT
$\backslash$ startmarginblock [...*] ... $\backslash$ stopmarginblock * NAME OPT
$\backslash$ startmarkedcontent [...*] ... $\backslash$ stopmarkedcontent * reset tot NAME OPT
$\backslash$ startmarkpages [...,*...] ... $\backslash$ stopmarkpages * NAME
$\backslash$ startmatematica [...*] ... $\backslash$ stopmatematica * implicit i:default i:half i:tight i:fixed NAME
$\backslash$ startMATHALIGNMENT [...,*...,...] ... $\backslash$ stopMATHALIGNMENT * inherits: \setupmathalignment OPT instances: align mathalignment
$\backslash$ startalign [...,*...,...] ... $\backslash$ stopalign * inherits: \setupmathalignment
$\backslash$ startmathalignment [...,*...,...] ... $\backslash$ stopmathalignment * inherits: \setupmathalignment OPT
$\backslash$ startMATHCASES [...,*...,...] ... $\backslash$ stopMATHCASES * inherits: \setupmathcases OPT instances: cases mathcases
$\backslash$ startcases [...,*...,...] ... $\backslash$ stopcases * inherits: \setupmathcases OPT
$\backslash$ startmathcases [...,*...,...] ... $\backslash$ stopmathcases * inherits: \setupmathcases OPT
$\backslash$ startmathexport [...,*...,...] ... $\backslash$ stopmathexport * inherits: \setupmathexport OPT
$\backslash$ startmathfenced [... ¹ .] [...,*... ² ...,...] ... $\backslash$ stopmathfenced 1 parenthesis bracket brace angle doubleangle bar doublebar triplebar solidus floor ceiling moustache uppercorner lowercorner group openbracket nothing mirroredparenthesis mirroredbracket mirroredbrace mirroredangle mirroreddoubleangle mirroredbar mirroreddoublebar mirroredtriplebar mirroredsolidus mirroredfloor mirroredceiling mirroredmoustache mirroreduppercorner mirroredlowercorner mirroredgroup mirroredopenbracket mirrorednothing interval openinterval leftopeninterval rightopeninterval NAME 2 inherits: \setupmathfences
$\backslash$ startMATHMATRIX [...,*...,...] ... $\backslash$ stopMATHMATRIX * inherits: \setupmathmatrix OPT instances: matrix mathmatrix thematrix

$\backslash\mathrm{startmathmatrix} \quad [\dots \stackrel{*}{=} \dots] \dots \backslash\mathrm{stopmathmatrix}$ $\ast \quad \mathrm{inherits:} \backslash\mathrm{setupmathmatrix} \quad \mathrm{OPT}$
$\backslash\mathrm{startmatrix} \quad [\dots \stackrel{*}{=} \dots] \dots \backslash\mathrm{stopmatrix}$ $\ast \quad \mathrm{inherits:} \backslash\mathrm{setupmathmatrix}$
$\backslash\mathrm{startthematrix} \quad [\dots \stackrel{*}{=} \dots] \dots \backslash\mathrm{stopthematrix}$ $\ast \quad \mathrm{inherits:} \backslash\mathrm{setupmathmatrix} \quad \mathrm{OPT}$
$\backslash\mathrm{startmathmeaning} \dots \backslash\mathrm{stopmathmeaning}$
$\backslash\mathrm{startmathmode} \dots \backslash\mathrm{stopmathmode}$
$\backslash\mathrm{startMATHOPERATOR} \quad [\dots \stackrel{*}{=} \dots] \dots \backslash\mathrm{stopMATHOPERATOR}$ $\ast \quad \mathrm{inherits:} \backslash\mathrm{setupmathoperators} \quad \mathrm{OPT}$ instances: integral iintegral iintegral iiiintegral int iint iiint iiiint oint oint oiiint intc ointc aointc sumint barint doublebarint slashint aodownintc rectangularpoleintc semicirclepoleintc circlepoleoutsideintc circlepoleinsideintc squareintc hookleftarrowint timesint capint cupint upperint lowerint sum blackboardsum modtwosum prod coprod bigwedge bigvee bigcap bigcup bigodot bigoplus bigotimes bigodot biguplus bigsqcap bigsqcup bigtimes leftouterjoin rightouterjoin fullouterjoin bigbottom bigtop bigsolidus bigreversesolidus bigdoublewedge bigdoublevee
$\backslash\mathrm{startaodownintc} \quad [\dots \stackrel{*}{=} \dots] \dots \backslash\mathrm{stopaodownintc}$ $\ast \quad \mathrm{inherits:} \backslash\mathrm{setupmathoperators} \quad \mathrm{OPT}$
$\backslash\mathrm{startaointc} \quad [\dots \stackrel{*}{=} \dots] \dots \backslash\mathrm{stopaointc}$ $\ast \quad \mathrm{inherits:} \backslash\mathrm{setupmathoperators}$
$\backslash\mathrm{startbarint} \quad [\dots \stackrel{*}{=} \dots] \dots \backslash\mathrm{stopbarint}$ $\ast \quad \mathrm{inherits:} \backslash\mathrm{setupmathoperators} \quad \mathrm{OPT}$
$\backslash\mathrm{startbigbottom} \quad [\dots \stackrel{*}{=} \dots] \dots \backslash\mathrm{stopbigbottom}$ $\ast \quad \mathrm{inherits:} \backslash\mathrm{setupmathoperators} \quad \mathrm{OPT}$
$\backslash\mathrm{startbigcap} \quad [\dots \stackrel{*}{=} \dots] \dots \backslash\mathrm{stopbigcap}$ $\ast \quad \mathrm{inherits:} \backslash\mathrm{setupmathoperators}$
$\backslash\mathrm{startbigcup} \quad [\dots \stackrel{*}{=} \dots] \dots \backslash\mathrm{stopbigcup}$ $\ast \quad \mathrm{inherits:} \backslash\mathrm{setupmathoperators}$
$\backslash\mathrm{startbigdoublevee} \quad [\dots \stackrel{*}{=} \dots] \dots \backslash\mathrm{stopbigdoublevee}$ $\ast \quad \mathrm{inherits:} \backslash\mathrm{setupmathoperators} \quad \mathrm{OPT}$
$\backslash\mathrm{startbigdoublewedge} \quad [\dots \stackrel{*}{=} \dots] \dots \backslash\mathrm{stopbigdoublewedge}$ $\ast \quad \mathrm{inherits:} \backslash\mathrm{setupmathoperators} \quad \mathrm{OPT}$
$\backslash\mathrm{startbigodot} \quad [\dots \stackrel{*}{=} \dots] \dots \backslash\mathrm{stopbigodot}$ $\ast \quad \mathrm{inherits:} \backslash\mathrm{setupmathoperators} \quad \mathrm{OPT}$
$\backslash\mathrm{startbigoplus} \quad [\dots \stackrel{*}{=} \dots] \dots \backslash\mathrm{stopbigoplus}$ $\ast \quad \mathrm{inherits:} \backslash\mathrm{setupmathoperators}$
$\backslash\mathrm{startbigotimes} \quad [\dots \stackrel{*}{=} \dots] \dots \backslash\mathrm{stopbigotimes}$ $\ast \quad \mathrm{inherits:} \backslash\mathrm{setupmathoperators} \quad \mathrm{OPT}$

$\backslash\text{startbigreversesolidus}$ $[...,\overset{*}{=},...]$... $\backslash\text{stopbigreversesolidus}$ * inherits: $\backslash\text{setupmathoperators}$ OPT
$\backslash\text{startbigsolidus}$ $[...,\overset{*}{=},...]$... $\backslash\text{stopbigsolidus}$ * inherits: $\backslash\text{setupmathoperators}$ OPT
$\backslash\text{startbigsqcap}$ $[...,\overset{*}{=},...]$... $\backslash\text{stopbigsqcap}$ * inherits: $\backslash\text{setupmathoperators}$ OPT
$\backslash\text{startbigsqcup}$ $[...,\overset{*}{=},...]$... $\backslash\text{stopbigsqcup}$ * inherits: $\backslash\text{setupmathoperators}$ OPT
$\backslash\text{startbigtimes}$ $[...,\overset{*}{=},...]$... $\backslash\text{stopbigtimes}$ * inherits: $\backslash\text{setupmathoperators}$ OPT
$\backslash\text{startbigtop}$ $[...,\overset{*}{=},...]$... $\backslash\text{stopbigtop}$ * inherits: $\backslash\text{setupmathoperators}$ OPT
$\backslash\text{startbigudot}$ $[...,\overset{*}{=},...]$... $\backslash\text{stopbigudot}$ * inherits: $\backslash\text{setupmathoperators}$ OPT
$\backslash\text{startbiguplus}$ $[...,\overset{*}{=},...]$... $\backslash\text{stopbiguplus}$ * inherits: $\backslash\text{setupmathoperators}$ OPT
$\backslash\text{startbigvee}$ $[...,\overset{*}{=},...]$... $\backslash\text{stopbigvee}$ * inherits: $\backslash\text{setupmathoperators}$ OPT
$\backslash\text{startbigwedge}$ $[...,\overset{*}{=},...]$... $\backslash\text{stopbigwedge}$ * inherits: $\backslash\text{setupmathoperators}$ OPT
$\backslash\text{startblackboardspace}$ $[...,\overset{*}{=},...]$... $\backslash\text{stopblackboardspace}$ * inherits: $\backslash\text{setupmathoperators}$ OPT
$\backslash\text{startcapint}$ $[...,\overset{*}{=},...]$... $\backslash\text{stopcapint}$ * inherits: $\backslash\text{setupmathoperators}$ OPT
$\backslash\text{startcirclepoleinsideintc}$ $[...,\overset{*}{=},...]$... $\backslash\text{stopcirclepoleinsideintc}$ * inherits: $\backslash\text{setupmathoperators}$ OPT
$\backslash\text{startcirclepoleoutsideintc}$ $[...,\overset{*}{=},...]$... $\backslash\text{stopcirclepoleoutsideintc}$ * inherits: $\backslash\text{setupmathoperators}$ OPT
$\backslash\text{startcoprod}$ $[...,\overset{*}{=},...]$... $\backslash\text{stopcoprod}$ * inherits: $\backslash\text{setupmathoperators}$ OPT
$\backslash\text{startcupint}$ $[...,\overset{*}{=},...]$... $\backslash\text{stopcupint}$ * inherits: $\backslash\text{setupmathoperators}$ OPT
$\backslash\text{startdoublebarint}$ $[...,\overset{*}{=},...]$... $\backslash\text{stopdoublebarint}$ * inherits: $\backslash\text{setupmathoperators}$ OPT
$\backslash\text{startfullouterjoin}$ $[...,\overset{*}{=},...]$... $\backslash\text{stopfullouterjoin}$ * inherits: $\backslash\text{setupmathoperators}$ OPT
$\backslash\text{starthookleftarrowint}$ $[...,\overset{*}{=},...]$... $\backslash\text{stophookleftarrowint}$ * inherits: $\backslash\text{setupmathoperators}$ OPT

$\backslash\text{startiiiint}$ $[\dots\overset{*}{=}\dots]$... $\backslash\text{stopiiiint}$ * inherits: $\backslash\text{setupmathoperators}^{\text{OPT}}$
$\backslash\text{startiiiintegral}$ $[\dots\overset{*}{=}\dots]$... $\backslash\text{stopiiiintegral}$ * inherits: $\backslash\text{setupmathoperators}^{\text{OPT}}$
$\backslash\text{startiiint}$ $[\dots\overset{*}{=}\dots]$... $\backslash\text{stopiiint}$ * inherits: $\backslash\text{setupmathoperators}^{\text{OPT}}$
$\backslash\text{startiiintegral}$ $[\dots\overset{*}{=}\dots]$... $\backslash\text{stopiiintegral}$ * inherits: $\backslash\text{setupmathoperators}^{\text{OPT}}$
$\backslash\text{startiint}$ $[\dots\overset{*}{=}\dots]$... $\backslash\text{stopiint}$ * inherits: $\backslash\text{setupmathoperators}^{\text{OPT}}$
$\backslash\text{startiintegral}$ $[\dots\overset{*}{=}\dots]$... $\backslash\text{stopiintegral}$ * inherits: $\backslash\text{setupmathoperators}^{\text{OPT}}$
$\backslash\text{startint}$ $[\dots\overset{*}{=}\dots]$... $\backslash\text{stopint}$ * inherits: $\backslash\text{setupmathoperators}^{\text{OPT}}$
$\backslash\text{startintc}$ $[\dots\overset{*}{=}\dots]$... $\backslash\text{stopintc}$ * inherits: $\backslash\text{setupmathoperators}^{\text{OPT}}$
$\backslash\text{startintegral}$ $[\dots\overset{*}{=}\dots]$... $\backslash\text{stopintegral}$ * inherits: $\backslash\text{setupmathoperators}^{\text{OPT}}$
$\backslash\text{startleftouterjoin}$ $[\dots\overset{*}{=}\dots]$... $\backslash\text{stopleftouterjoin}$ * inherits: $\backslash\text{setupmathoperators}^{\text{OPT}}$
$\backslash\text{startlowerint}$ $[\dots\overset{*}{=}\dots]$... $\backslash\text{stoplowerint}$ * inherits: $\backslash\text{setupmathoperators}^{\text{OPT}}$
$\backslash\text{startmodtwosum}$ $[\dots\overset{*}{=}\dots]$... $\backslash\text{stopmodtwosum}$ * inherits: $\backslash\text{setupmathoperators}^{\text{OPT}}$
$\backslash\text{startoiint}$ $[\dots\overset{*}{=}\dots]$... $\backslash\text{stopoiint}$ * inherits: $\backslash\text{setupmathoperators}^{\text{OPT}}$
$\backslash\text{startoiint}$ $[\dots\overset{*}{=}\dots]$... $\backslash\text{stopoint}$ * inherits: $\backslash\text{setupmathoperators}^{\text{OPT}}$
$\backslash\text{startoint}$ $[\dots\overset{*}{=}\dots]$... $\backslash\text{stopoint}$ * inherits: $\backslash\text{setupmathoperators}^{\text{OPT}}$
$\backslash\text{startointc}$ $[\dots\overset{*}{=}\dots]$... $\backslash\text{stopointc}$ * inherits: $\backslash\text{setupmathoperators}^{\text{OPT}}$
$\backslash\text{startprod}$ $[\dots\overset{*}{=}\dots]$... $\backslash\text{stopprod}$ * inherits: $\backslash\text{setupmathoperators}^{\text{OPT}}$
$\backslash\text{startrectangularpoleintc}$ $[\dots\overset{*}{=}\dots]$... $\backslash\text{stoprectangularpoleintc}$ * inherits: $\backslash\text{setupmathoperators}^{\text{OPT}}$
$\backslash\text{startrightouterjoin}$ $[\dots\overset{*}{=}\dots]$... $\backslash\text{stoprightouterjoin}$ * inherits: $\backslash\text{setupmathoperators}^{\text{OPT}}$

$\backslash\text{startsemicirclepoleintc}$ [...] $\backslash\text{stopsemicirclepoleintc}$ * inherits: $\backslash\text{setupmathoperators}$ ^{OPT}
$\backslash\text{startslashint}$ [...] $\backslash\text{stopslashint}$ * inherits: $\backslash\text{setupmathoperators}$
$\backslash\text{startsquareintc}$ [...] $\backslash\text{stopsquareintc}$ * inherits: $\backslash\text{setupmathoperators}$ ^{OPT}
$\backslash\text{startsum}$ [...] $\backslash\text{stopsum}$ * inherits: $\backslash\text{setupmathoperators}$
$\backslash\text{startsumint}$ [...] $\backslash\text{stopsumint}$ * inherits: $\backslash\text{setupmathoperators}$ ^{OPT}
$\backslash\text{starttimesint}$ [...] $\backslash\text{stoptimesint}$ * inherits: $\backslash\text{setupmathoperators}$ ^{OPT}
$\backslash\text{startupperint}$ [...] $\backslash\text{stopupperint}$ * inherits: $\backslash\text{setupmathoperators}$ ^{OPT}
$\backslash\text{startMATHSIMPLEALIGN}$ [...] $\backslash\text{stopMATHSIMPLEALIGN}$ * inherits: $\backslash\text{setupmathsimplealign}$ ^{OPT} instances: equationsystem lequationsystem reequationsystem
$\backslash\text{startequationsystem}$ [...] $\backslash\text{stopequationsystem}$ * inherits: $\backslash\text{setupmathsimplealign}$ ^{OPT}
$\backslash\text{startlequationsystem}$ [...] $\backslash\text{stoplequationsystem}$ * inherits: $\backslash\text{setupmathsimplealign}$ ^{OPT}
$\backslash\text{startrequationsystem}$ [...] $\backslash\text{stoprequationsystem}$ * inherits: $\backslash\text{setupmathsimplealign}$ ^{OPT}
$\backslash\text{startmathstyle}$ [...] $\backslash\text{stopmathstyle}$ * display text script scriptscript cramped uncramped normal impachetat mic mare NAME
$\backslash\text{startmatrices}$ [...] $\backslash\text{stopmatrices}$ * inherits: $\backslash\text{setupmathmatrix}$ ^{OPT}
$\backslash\text{startmatrixanchors}$... $\backslash\text{stopmatrixanchors}$
$\backslash\text{startmaxaligned}$... $\backslash\text{stopmaxaligned}$
$\backslash\text{startmediu}$ [...] $\backslash\text{stopmediu}$ * FILE *
$\backslash\text{startmediu}$... $\backslash\text{stopmediu}$ * FILE *
$\backslash\text{startmeniuiinteractiune}$ [...] $\backslash\text{stopmeniuiinteractiune}$ * NAME
$\backslash\text{startmiddlealigned}$... $\backslash\text{stopmiddlealigned}$

<pre> \startmixedcolumns [...¹...] [...²...] ... \stopmixedcolumns 1 NAME OPT OPT 2 inherits: \setupmixedcolumns </pre>
<pre> \startMIXEDCOLUMNS [...[*]...] ... \stopMIXEDCOLUMNS * inherits: \setupmixedcolumns OPT instances: itemgroupcolumns boxedcolumns columns </pre>
<pre> \startboxedcolumns [...[*]...] ... \stopboxedcolumns * inherits: \setupmixedcolumns OPT </pre>
<pre> \startcolumns [...[*]...] ... \stopcolumns * inherits: \setupmixedcolumns OPT </pre>
<pre> \startitemgroupcolumns [...[*]...] ... \stopitemgroupcolumns * inherits: \setupmixedcolumns OPT </pre>
<pre> \startmode [...[*]...] ... \stopmode * NAME </pre>
<pre> \startmodeset [...¹...] {...²} ... \stopmodeset 1 NAME implicit 2 CONTENT </pre>
<pre> \startmodule [...[*]...] ... \stopmodule * FILE </pre>
<pre> \startmoduletestsection ... \stopmoduletestsection </pre>
<pre> \startmodule ...[*] ... \stopmodule * FILE </pre>
<pre> \startmulticolumns [...[*]...] ... \stopmulticolumns * inherits: \setupmulticolumns OPT </pre>
<pre> \startnamedformula [...¹...] [...²...] ... \stopnamedformula 1 NAME OPT 2 impachetat tight centru adancime linie jumatatelinie -linie -jumatatelinie incadrat mic DIMENSION </pre>
<pre> \startnamedformula [...¹...] [...²...] ... \stopnamedformula 1 NAME OPT 2 inherits: \setezaformula </pre>
<pre> \startnamedmatrix [...¹...] [...²...] {...³} ... \stopnamedmatrix 1 NAME OPT 2 inherits: \setupmathmatrix 3 CONTENT </pre>
<pre> \startnamednotation [...¹...] [...²...] ... \stopnamednotation 1 NAME OPT 2 REFERENCE </pre>
<pre> \startnamednotation [...¹...] [...²...] ... \stopnamednotation 1 NAME 2 titlu = TEXT semncarte = TEXT lista = TEXT referinta = REFERENCE referencetext = TEXT </pre>

<pre> \startnamedsection [...¹] [...,...²...,...] [...,...³...,...] ... \stopnamedsection 1 ABSCHNITT 2 titlu = TEXT semncarte = TEXT marcaje = TEXT lista = TEXT referinta = REFERENCE referencetext = TEXT numarpropriu = TEXT placeholder = TEXT 3 KEY = VALUE </pre>
<pre> \startnamedsubformulas [...¹,...] {...²} ... \stopnamedsubformulas 1 + - REFERENCE 2 TEXT </pre>
<pre> \startnamedtyping [...¹] [...,...²...,...] ... \stopnamedtyping 1 NAME 2 inherits: \seteazatyping </pre>
<pre> \startnamedtyping [...¹] [...;²...] ... \stopnamedtyping 1 NAME 2 continuu </pre>
<pre> \startnarrower [...[*],...] ... \stopnarrower * [-+]stanga [-+]centru [^{OPT}]dreapta NUMBER*stanga NUMBER*centru NUMBER*dreapta reset reverse </pre>
<pre> \startNARROWER [...[*],...] ... \stopNARROWER * [-+]stanga [-+]centru [^{OPT}]dreapta NUMBER*stanga NUMBER*centru NUMBER*dreapta reset reverse </pre>
<pre> \startnegativ ... \stopnegativ </pre>
<pre> \startnicelyfilledbox [...,...[*]...,...] ... \stopnicelyfilledbox * latime = DIMENSION inaltime = DIMENSION offset = DIMENSION strut = da nu </pre>
<pre> \startnointerference ... \stopnointerference </pre>
<pre> \startnotallmodes [...;[*]...] ... \stopnotallmodes * NAME </pre>
<pre> \startNOTE [...;[*]...] ... \stopNOTE * REFERENCE instances: footnote endnote mathnote publicationnote </pre>
<pre> \startNOTE [...,...[*]...,...] ... \stopNOTE * titlu = TEXT semncarte = TEXT lista = TEXT referinta = REFERENCE referencetext = TEXT instances: footnote endnote mathnote publicationnote </pre>
<pre> \startendnote [...,...[*]...,...] ... \stopendnote * titlu = TEXT semncarte = TEXT lista = TEXT referinta = REFERENCE referencetext = TEXT </pre>

<pre> \startfootnote [...,.*=...,...] ... \stopfootnote * titlu = TEXT OPT semncarte = TEXT lista = TEXT referinta = REFERENCE referencetext = TEXT </pre>
<pre> \startmathnote [...,.*=...,...] ... \stopmathnote * titlu = TEXT OPT semncarte = TEXT lista = TEXT referinta = REFERENCE referencetext = TEXT </pre>
<pre> \startpublicationnote [...,.*=...,...] ... \stoppublicationnote * titlu = TEXT OPT semncarte = TEXT lista = TEXT referinta = REFERENCE referencetext = TEXT </pre>
<pre> \startendnote [...,*...] ... \stopendnote * REFERENCE OPT </pre>
<pre> \startfootnote [...,*...] ... \stopfootnote * REFERENCE OPT </pre>
<pre> \startmathnote [...,*...] ... \stopmathnote * REFERENCE OPT </pre>
<pre> \startpublicationnote [...,*...] ... \stoppublicationnote * REFERENCE OPT </pre>
<pre> \startnotext ... \stopnotext </pre>
<pre> \startnotmode [...,*...] ... \stopnotmode * NAME </pre>
<pre> \startopus ... \stopopus </pre>
<pre> \startoutputstream [...] ... \stopoutputstream * NAME </pre>
<pre> \startoutputsubstream [...] ... \stopoutputsubstream * NAME </pre>
<pre> \startoverlay ... \stopoverlay </pre>
<pre> \startoverlayMPgraphic {...} ... \stopoverlayMPgraphic * NAME </pre>
<pre> \startoverprint ... \stopoverprint </pre>
<pre> \startPDFalternativetext {...} ... \stopPDFalternativetext * TEXT </pre>
<pre> \startPDFhighlight [...¹] [...²] ... \stopPDFhighlight 1 NAME OPT 2 TEXT </pre>

\startpageblock [...] ... \stoppageblock * NAME
\startpagecolumns [...,.. ¹ ...,...] ... \stoppagecolumns * inherits: \setuppagecolumns OPT
\startPAGECOLUMNS ... \stopPAGECOLUMNS
\startpagecolumns [...] ... \stoppagecolumns * NAME OPT
\startpagefigure [... ¹] [...,.. ² ...,...] ... \stoppagefigure 1 FILE OPT 2 offset = implicit overlay niciunul DIMENSION
\startpagelayout [...] ... \stoppagelayout * pagina paginastanga paginadreahta
\startpar [... ¹] [...,.. ² ...,...] ... \stoppar 1 NAME OPT OPT 2 inherits: \setupparagraph
\startparagraf [... ¹] [...,.. ² ...,...] ... \stopparagraf 1 NAME OPT OPT 2 inherits: \setupparagraph
\startparagraphs [...] ... \stopparagraphs * NAME
\startparagraphscell ... \stopparagraphscell
\startparagraphshape [...] ... \stopparagraphshape * NAME
\startPARAGRAPHS ... \stopPARAGRAPHS
\startPARALLEL ... \stopPARALLEL
\startparbuilder [...] ... \stopparbuilder * implicit oneline basic NAME
\startpatterns [...] ... \stoppatterns * SPRACHE OPT
\startplacefloat [... ¹] [...,.. ² ...,...] [...,.. ³ ...,...] ... \stopplacefloat 1 SINGULAR OPT OPT 2 titlu = TEXT semncarte = TEXT marcaje = TEXT lista = TEXT locatie = split keeptogether totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta imargine marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat tight tolerant foartetolerant 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreahta paragraf undeva effective antet subsol tblr lrtb tblr rltb fxtb btlr lrbt btrl rlbt fxbt fixd append referinta = REFERENCE referencetext = TEXT 3 KEY = VALUE

```

\startplacefloattext  [...1...]  [...2...]  [...3...] ... \stopplacefloattext
1  NAME
2  titlu              = TEXT
   semncarte         = TEXT
   marcaje           = TEXT
   lista             = TEXT
   locatie           = split keep together totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta
                        inmargine marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin
                        inneredge outeredge text opus reset inaltime adancime [--]linie jumatatelinie grila inalt jos
                        ajustat tight tolerant foartetolerant 90 180 270 nonumber niciunul local aici fortat margine
                        [--]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta
                        paragraf undeva effective antet subsol tblr lrtb tblr rltb fxtb btlr lrbt btrl rltb fxbt fixd
                        append
   referinta         = REFERENCE
   referencetext     = TEXT
3  KEY = VALUE

```

```

\startpuneFLOATtext  [...1...]  [...2...] ... \stoppuneFLOATtext
1  titlu              = TEXT
   semncarte         = TEXT
   marcaje           = TEXT
   lista             = TEXT
   locatie           = split keep together totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta
                        inmargine marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin
                        inneredge outeredge text opus reset inaltime adancime [--]linie jumatatelinie grila inalt jos
                        ajustat tight tolerant foartetolerant 90 180 270 nonumber niciunul local aici fortat margine
                        [--]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta
                        paragraf undeva effective antet subsol tblr lrtb tblr rltb fxtb btlr lrbt btrl rltb fxbt fixd
                        append
   referinta         = REFERENCE
   referencetext     = TEXT
2  KEY = VALUE
instances: chemical figure table intermezzo graphic

```

```

\startpunechemicaltext  [...1...]  [...2...] ... \stoppunechemicaltext
1  titlu              = TEXT
   semncarte         = TEXT
   marcaje           = TEXT
   lista             = TEXT
   locatie           = split keep together totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta
                        inmargine marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin
                        inneredge outeredge text opus reset inaltime adancime [--]linie jumatatelinie grila inalt jos
                        ajustat tight tolerant foartetolerant 90 180 270 nonumber niciunul local aici fortat margine
                        [--]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta
                        paragraf undeva effective antet subsol tblr lrtb tblr rltb fxtb btlr lrbt btrl rltb fxbt fixd
                        append
   referinta         = REFERENCE
   referencetext     = TEXT
2  KEY = VALUE

```

```

\startpunefiguretext  [...1...]  [...2...] ... \stoppunefiguretext
1  titlu              = TEXT
   semncarte         = TEXT
   marcaje           = TEXT
   lista             = TEXT
   locatie           = split keep together totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta
                        inmargine marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin
                        inneredge outeredge text opus reset inaltime adancime [--]linie jumatatelinie grila inalt jos
                        ajustat tight tolerant foartetolerant 90 180 270 nonumber niciunul local aici fortat margine
                        [--]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta
                        paragraf undeva effective antet subsol tblr lrtb tblr rltb fxtb btlr lrbt btrl rltb fxbt fixd
                        append
   referinta         = REFERENCE
   referencetext     = TEXT
2  KEY = VALUE

```

```

\startpunegraphictext  [...,..1...,...]  [...,..2...,...] ... \stoppunegraphictext
1  titlu                = TEXT
    semncarte           = TEXT
    marcaje             = TEXT
    lista               = TEXT
    locatie             = split keep together totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta
                          immarginemarginestangamarginedreapta bordurastanga borduradreapta innermargin outermargin
                          inneredge outeredge text opus reset inaltime adancime [--]linie jumatatelinie grila inalt jos
                          ajustat tight tolerant foartetolerant 90 180 270 nonumber niciunul local aici fortat margine
                          [--]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta
                          paragraf undeva effective antet subsol tblr lrtb tblr rltb fxtb btlr lrbt btrl rltb fxbt fixd
                          append
    referinta           = REFERENCE
    referencetext       = TEXT
2  KEY = VALUE

```

```

\startpuneintermezzotext  [...,..1...,...]  [...,..2...,...] ... \stoppuneintermezzotext
1  titlu                = TEXT
    semncarte           = TEXT
    marcaje             = TEXT
    lista               = TEXT
    locatie             = split keep together totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta
                          immarginemarginestangamarginedreapta bordurastanga borduradreapta innermargin outermargin
                          inneredge outeredge text opus reset inaltime adancime [--]linie jumatatelinie grila inalt jos
                          ajustat tight tolerant foartetolerant 90 180 270 nonumber niciunul local aici fortat margine
                          [--]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta
                          paragraf undeva effective antet subsol tblr lrtb tblr rltb fxtb btlr lrbt btrl rltb fxbt fixd
                          append
    referinta           = REFERENCE
    referencetext       = TEXT
2  KEY = VALUE

```

```

\startpunetabletext  [...,..1...,...]  [...,..2...,...] ... \stoppunetabletext
1  titlu                = TEXT
    semncarte           = TEXT
    marcaje             = TEXT
    lista               = TEXT
    locatie             = split keep together totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta
                          immarginemarginestangamarginedreapta bordurastanga borduradreapta innermargin outermargin
                          inneredge outeredge text opus reset inaltime adancime [--]linie jumatatelinie grila inalt jos
                          ajustat tight tolerant foartetolerant 90 180 270 nonumber niciunul local aici fortat margine
                          [--]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta
                          paragraf undeva effective antet subsol tblr lrtb tblr rltb fxtb btlr lrbt btrl rltb fxbt fixd
                          append
    referinta           = REFERENCE
    referencetext       = TEXT
2  KEY = VALUE

```

```

\startpuneFLOAT  [...,..1...,...]  [...,..2...,...] ... \stoppuneFLOAT
1  titlu                = TEXT
    semncarte           = TEXT
    marcaje             = TEXT
    lista               = TEXT
    locatie             = split keep together totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta
                          immarginemarginestangamarginedreapta bordurastanga borduradreapta innermargin outermargin
                          inneredge outeredge text opus reset inaltime adancime [--]linie jumatatelinie grila inalt jos
                          ajustat tight tolerant foartetolerant 90 180 270 nonumber niciunul local aici fortat margine
                          [--]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta
                          paragraf undeva effective antet subsol tblr lrtb tblr rltb fxtb btlr lrbt btrl rltb fxbt fixd
                          append
    referinta           = REFERENCE
    referencetext       = TEXT
2  KEY = VALUE

instances: chemical figure table intermezzo graphic

```

```

\startpunechemical [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] ... \stoppunechemical
1 titlu = TEXT
  semncarte = TEXT
  marcaje = TEXT
  lista = TEXT
  locatie = split keep together totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta
            imargine marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin
            inneredge outeredge text opus reset inalttime adancime [-+]linie jumatatelinie grila inalt jos
            ajustat tight tolerant foartetolerant 90 180 270 nonumber niciunul local aici fortat margine
            [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta
            paragraf undeva effective antet subsol tblr lrtb tblr rltb fxtb btlr lrbt btrl rltb fxbt fixd
            append
  referinta = REFERENCE
  referencetext = TEXT
2 KEY = VALUE

```

```

\startpunefigure [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] ... \stoppunefigure
1 titlu = TEXT
  semncarte = TEXT
  marcaje = TEXT
  lista = TEXT
  locatie = split keep together totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta
            imargine marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin
            inneredge outeredge text opus reset inalttime adancime [-+]linie jumatatelinie grila inalt jos
            ajustat tight tolerant foartetolerant 90 180 270 nonumber niciunul local aici fortat margine
            [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta
            paragraf undeva effective antet subsol tblr lrtb tblr rltb fxtb btlr lrbt btrl rltb fxbt fixd
            append
  referinta = REFERENCE
  referencetext = TEXT
2 KEY = VALUE

```

```

\startpunegraphic [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] ... \stoppunegraphic
1 titlu = TEXT
  semncarte = TEXT
  marcaje = TEXT
  lista = TEXT
  locatie = split keep together totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta
            imargine marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin
            inneredge outeredge text opus reset inalttime adancime [-+]linie jumatatelinie grila inalt jos
            ajustat tight tolerant foartetolerant 90 180 270 nonumber niciunul local aici fortat margine
            [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta
            paragraf undeva effective antet subsol tblr lrtb tblr rltb fxtb btlr lrbt btrl rltb fxbt fixd
            append
  referinta = REFERENCE
  referencetext = TEXT
2 KEY = VALUE

```

```

\startpuneintermezzo [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] ... \stoppuneintermezzo
1 titlu = TEXT
  semncarte = TEXT
  marcaje = TEXT
  lista = TEXT
  locatie = split keep together totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta
            imargine marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin
            inneredge outeredge text opus reset inalttime adancime [-+]linie jumatatelinie grila inalt jos
            ajustat tight tolerant foartetolerant 90 180 270 nonumber niciunul local aici fortat margine
            [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta
            paragraf undeva effective antet subsol tblr lrtb tblr rltb fxtb btlr lrbt btrl rltb fxbt fixd
            append
  referinta = REFERENCE
  referencetext = TEXT
2 KEY = VALUE

```

<pre> \startpunetable [...,..¹...,...] [...,..²...,...] ... \stoppunetable 1 titlu = TEXT OPT semncarte = TEXT marcaje = TEXT lista = TEXT locatie = split keep together totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmarginemarginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat tight tolerant foartetolerant 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta paragraf undeva effective antet subsol tblr lrtb tblr rltb fxtb btlr lrbt btrl rltb fxbt fixd append referinta = REFERENCE referencetext = TEXT 2 KEY = VALUE </pre>
<pre> \startplacepairedbox [...¹] [...,..²...,...] ... \stopplacepairedbox 1 NAME OPT 2 inherits: \setuppairedbox </pre>
<pre> \startpunePAIREDBOX [...,..[*]...,...] ... \stoppunePAIREDBOX * inherits: \setuppairedbox OPT instances: legend </pre>
<pre> \startpunelegend [...,..[*]...,...] ... \stoppunelegend * inherits: \setuppairedbox OPT </pre>
<pre> \startpositioning [...¹] [...,..²...,...] ... \stoppositioning 1 NAME OPT OPT 2 inherits: \setarepozitie </pre>
<pre> \startpositionoverlay {...} ... \stoppositionoverlay * NAME </pre>
<pre> \startpositiv ... \stoppositiv </pre>
<pre> \startpostponing [...[*]] ... \stoppostponing * [-+]NUMBER OPT </pre>
<pre> \startpostponingnotes ... \stoppostponingnotes </pre>
<pre> \startprerollpageblock [...[*]] ... \stopprerollpageblock * NAME </pre>
<pre> \startprocessassignmentcommand [...,..[*]...,...] ... \stopprocessassignmentcommand * KEY = VALUE </pre>
<pre> \startprocessassignmentlist [...,..[*]...,...] ... \stopprocessassignmentlist * KEY = VALUE </pre>
<pre> \startprocesscommacommand [...,[*]...] ... \stopprocesscommacommand * BEFEHL </pre>
<pre> \startprocesscommalist [...,[*]...] ... \stopprocesscommalist * BEFEHL </pre>
<pre> \startprodus [...[*]] ... \stopprodus * FILE * </pre>
<pre> \startprodus .[*] ... \stopprodus * FILE * </pre>

\startprofile [...] ... \stopprofile	
* NAME	OPT
\startprofile [...,.. [*] ...,...] ... \stopprofile	
* inherits: \setupprofile	OPT
\startPROFILE [...] ... \stopPROFILE	
* NAME	OPT
\startPROFILE [...,.. [*] ...,...] ... \stopPROFILE	
* inherits: \setupprofile	OPT
\startproiect [...] ... \stopproiect	
* FILE *	
\startproiect \stopproiect	
* FILE *	
\startprotectedcolors ... \stopprotectedcolors	
\startpublicatie [¹ ...] [...,.. ² ...,...] ... \stoppublicatie	
1 NAME	OPT
2 tag = REFERENCE	
category = TEXT	
k = REFERENCE	
t = TEXT	
\startpuneformula [...,.. ¹ ...,...] {... ² } ... \stoppuneformula	
1 titlu = TEXT	OPT
referinta = + - REFERENCE	
semncarte = TEXT	
lista = TEXT	
suffix = TEXT	
2 TEXT	
\startpuneformula [..., [*] ...] ... \stoppuneformula	
* + - REFERENCE	OPT
\starandomized ... \stoprandomized	
\starawsetups [...] ... \stoprawsetups	
* NAME	
\starawsetups \stoprawsetups	
* NAME	
\startreadingfile ... \stopreadingfile	
\startregime [...] ... \stopregime	
* inherits: \enableregime	
\startregister [¹] [²] [³] [⁴] {... ⁵ +...} ... \stopregister [⁷] [⁸]	
1 NAME	
2 NAME	
3 TEXT	
4 TEXT PROCESSOR->TEXT	
5 INDEX	
6 CONTENT	
7 NAME	
8 NAME	

<pre> \startreusableMPgraphic {...} {...,²...} ... \stopreusableMPgraphic 1 NAME 2 KEY </pre>
<pre> \starttriglatext {...} ... \stoptriglatext * TEXT </pre>
<pre> \startrows [...¹] [...,²...²...] ... \stoprows 1 NAME 2 inherits: \setuprows </pre>
<pre> \startROWS [...,[*]...[*]...] ... \stopROWS * inherits: \setuprows^{OPT} </pre>
<pre> \startruby [...] ... \stopruby * NAME </pre>
<pre> \startscript [...] ... \stopscript * hangul hanzi nihongo ethiopic thai tibetan test NAME </pre>
<pre> \startsectionblock [...¹] [...,²...²...] ... \stopsectionblock 1 NAME 2 semncarte = TEXT inherits: \seteazablocsectiune </pre>
<pre> \startSECTIONBLOCK [...,[*]...[*]...] ... \stopSECTIONBLOCK * semncarte = TEXT inherits: \seteazablocsectiune instances: frontmatter bodymatter appendices backmatter </pre>
<pre> \startappendices [...,[*]...[*]...] ... \stopappendices * semncarte = TEXT inherits: \seteazablocsectiune </pre>
<pre> \startbackmatter [...,[*]...[*]...] ... \stopbackmatter * semncarte = TEXT inherits: \seteazablocsectiune </pre>
<pre> \startbodymatter [...,[*]...[*]...] ... \stopbodymatter * semncarte = TEXT inherits: \seteazablocsectiune </pre>
<pre> \startfrontmatter [...,[*]...[*]...] ... \stopfrontmatter * semncarte = TEXT inherits: \seteazablocsectiune </pre>
<pre> \startsectionlevel [...¹] [...,²...²...] [...,³...³...] ... \stopsectionlevel 1 NAME 2 titlu = TEXT semncarte = TEXT marcaje = TEXT lista = TEXT referinta = REFERENCE referencetext = TEXT numarpropriu = TEXT placeholder = TEXT 3 KEY = VALUE </pre>

`\startSECTION` [$\dots\overset{1}{=}\dots$] [$\dots\overset{2}{=}\dots$] ... `\stopSECTION`

1 titlu = TEXT OPT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
referencetext = TEXT
numarpropriu = TEXT
placeholder = TEXT

2 KEY = VALUE

instances: part chapter section subsection subsubsection subsubsubsection
subsubsubsubsection title subject subsubject subsubsubject subsubsubsubject
subsubsubsubsubject

`\startchapter` [$\dots\overset{1}{=}\dots$] [$\dots\overset{2}{=}\dots$] ... `\stopchapter`

1 titlu = TEXT OPT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
referencetext = TEXT
numarpropriu = TEXT
placeholder = TEXT

2 KEY = VALUE

`\startpart` [$\dots\overset{1}{=}\dots$] [$\dots\overset{2}{=}\dots$] ... `\stoppart`

1 titlu = TEXT OPT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
referencetext = TEXT
numarpropriu = TEXT
placeholder = TEXT

2 KEY = VALUE

`\startsection` [$\dots\overset{1}{=}\dots$] [$\dots\overset{2}{=}\dots$] ... `\stopsection`

1 titlu = TEXT OPT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
referencetext = TEXT
numarpropriu = TEXT
placeholder = TEXT

2 KEY = VALUE

`\startsubject` [$\dots\overset{1}{=}\dots$] [$\dots\overset{2}{=}\dots$] ... `\stopsubject`

1 titlu = TEXT OPT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
referencetext = TEXT
numarpropriu = TEXT
placeholder = TEXT

2 KEY = VALUE

`\startsubsection` [$\dots\overset{1}{=}\dots$] [$\dots\overset{2}{=}\dots$] ... `\stopsubsection`

1 titlu = TEXT OPT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
referencetext = TEXT
numarpropriu = TEXT
placeholder = TEXT

2 KEY = VALUE

`\startsubsubject` [$\dots\overset{1}{=}\dots$] [$\dots\overset{2}{=}\dots$] ... `\stopsubsubject`

1 titlu = TEXT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
referencetext = TEXT
numarpropriu = TEXT
placeholder = TEXT

2 KEY = VALUE

`\startsubsubsection` [$\dots\overset{1}{=}\dots$] [$\dots\overset{2}{=}\dots$] ... `\stopsubsubsection`

1 titlu = TEXT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
referencetext = TEXT
numarpropriu = TEXT
placeholder = TEXT

2 KEY = VALUE

`\startsubsubsubject` [$\dots\overset{1}{=}\dots$] [$\dots\overset{2}{=}\dots$] ... `\stopsubsubsubject`

1 titlu = TEXT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
referencetext = TEXT
numarpropriu = TEXT
placeholder = TEXT

2 KEY = VALUE

`\startsubsubsubsection` [$\dots\overset{1}{=}\dots$] [$\dots\overset{2}{=}\dots$] ... `\stopsubsubsubsection`

1 titlu = TEXT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
referencetext = TEXT
numarpropriu = TEXT
placeholder = TEXT

2 KEY = VALUE

`\startsubsubsubsubject` [$\dots\overset{1}{=}\dots$] [$\dots\overset{2}{=}\dots$] ... `\stopsubsubsubsubject`

1 titlu = TEXT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
referencetext = TEXT
numarpropriu = TEXT
placeholder = TEXT

2 KEY = VALUE

`\startsubsubsubsubsection` [$\dots\overset{1}{=}\dots$] [$\dots\overset{2}{=}\dots$] ... `\stopsubsubsubsubsection`

1 titlu = TEXT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
referencetext = TEXT
numarpropriu = TEXT
placeholder = TEXT

2 KEY = VALUE

<pre> \startsubsubsubsubsubject [...,\stackrel{1}{=}\dots] [...,\stackrel{2}{=}\dots] ... \stopsubsubsubsubsubject 1 titlu = TEXT semncarte = TEXT marcaje = TEXT lista = TEXT referinta = REFERENCE referencetext = TEXT numarpropriu = TEXT placeholder = TEXT 2 KEY = VALUE </pre>
<pre> \starttitle [...,\stackrel{1}{=}\dots] [...,\stackrel{2}{=}\dots] ... \stoptitle 1 titlu = TEXT^{OPT} semncarte = TEXT marcaje = TEXT lista = TEXT referinta = REFERENCE referencetext = TEXT numarpropriu = TEXT placeholder = TEXT 2 KEY = VALUE </pre>
<pre> \startsetcolumnset [...,\stackrel{*}{=}\dots] ... \stopsetcolumnset * c = NUMBER r = NUMBER nc = NUMBER nr = NUMBER metoda = aici fixat sus subsol tblr lrtb tblr rltb btlr lrbt btrl rlbt fxtb fxbt optiune = pagina nsus = NUMBER njos = NUMBER </pre>
<pre> \startsetcolumnsetsheet [...] ... \stopsetcolumnsetsheet * NUMBER </pre>
<pre> \startsetcolumnsetsht [...,\stackrel{*}{=}\dots] ... \stopsetcolumnsetsht * c = NUMBER r = NUMBER nc = NUMBER nr = NUMBER metoda = aici fixat sus subsol tblr lrtb tblr rltb btlr lrbt btrl rlbt fxtb fxbt optiune = pagina nsus = NUMBER njos = NUMBER </pre>
<pre> \startsetups [...] ... \stopsetups * NAME </pre>
<pre> \startsetups .* ... \stopsetups * NAME </pre>
<pre> \startshadow [...] ... \stopshadow * NAME </pre>
<pre> \startshadow [...,\stackrel{*}{=}\dots] ... \stopshadow * inherits: \setupshadow </pre>
<pre> \startshapedparagraph [...,\stackrel{*}{=}\dots] ... \stopshapedparagraph * inherits: \setupshapedparagraph^{OPT} </pre>
<pre> \startshapetext [...] ... \stopshapetext * NAME </pre>
<pre> \startshift [...] ... \stopshift * NAME </pre>

<pre> \startshift [...,..[*]...,...] ... \stopshift * inherits: \setupshift </pre>
<pre> \startshowbalancepoints [...,..[*]...,...] ... \stopshowbalancepoints * optiune = margine simple OPT nivel = NUMBER lista = TEXT offset = DIMENSION </pre>
<pre> \startshowbreakpoints [...,..[*]...,...] ... \stopshowbreakpoints * optiune = margine simple OPT nivel = NUMBER lista = TEXT offset = DIMENSION </pre>
<pre> \startshowrivers [...,..[*]...,...] ... \stopshowrivers * margine = DIMENSION^{OPT} pas = DIMENSION inaltime = DIMENSION inaltime = DIMENSION spaceinbetween = DIMENSION criteriu = NUMBER optiune = test </pre>
<pre> \startsidebar [...¹] [...,..²...,...] ... \stopsidebar 1 NAME OPT OPT 2 inherits: \setupsidebar </pre>
<pre> \startsimplecolumns [...,..[*]...,...] ... \stopsimplecolumns * n = NUMBER OPT latime = DIMENSION distanta = DIMENSION linii = NUMBER </pre>
<pre> \startspecialitem [...¹] [...,..²...,...] ... \stopspecialitem 1 element OPT OPT 2 REFERENCE </pre>
<pre> \startspecialitem [...[*]] ... \stopspecialitem * sub propriu nu </pre>
<pre> \startspecialitem [...¹] {...²} ... \stopspecialitem 1 sym rulat mar txt 2 TEXT </pre>
<pre> \startsplittext ... \stopsplittext </pre>
<pre> \startspread ... \stopspread </pre>
<pre> \startstacking [...[*]] ... \stopstacking * NUMBER </pre>
<pre> \startstackingsteps [...[*];...] ... \stopstackingsteps * NUMBER </pre>
<pre> \startSTACKING [...[*]] ... \stopSTACKING * NUMBER </pre>
<pre> \startSTARTSTOP ... \stopSTARTSTOP </pre>
<pre> \startSTARTSTOP [...,..[*]...,...] ... \stopSTARTSTOP * inherits: \setupstartstop OPT </pre>

<code>\startstaticMPfigure {...} ... \stopstaticMPfigure</code> * NAME
<code>\startstaticMPgraphic {¹...} {²...,...} ... \stopstaticMPgraphic</code> 1 NAME 2 KEY
<code>\STARTSTOP {...}</code> * CONTENT
<code>\STARTSTOP [...,¹...,...²] {...}</code> 1 inherits: \setupstart^{OPT}stop 2 CONTENT
<code>\startstrictinspectnextcharacter ... \stopstrictinspectnextcharacter</code>
<code>\startstructurepageregister [¹...] [²...] [...,³...,...⁴] [...,⁵...,...⁶] ... \stopstructurepageregister [...⁷] [...⁸]</code> 1 NAME 2 NAME 3 eticheta = NAME keys = TEXT PROCESSOR->TEXT entries = TEXT PROCESSOR->TEXT processors = PROCESSOR keys:1 = TEXT keys:2 = TEXT keys:3 = TEXT entries:1 = TEXT entries:2 = TEXT entries:3 = TEXT alternativ = TEXT processors:1 = PROCESSOR processors:2 = PROCESSOR processors:3 = PROCESSOR 4 KEY = VALUE 5 CONTENT 6 NAME 7 NAME
<code>\startstyle [...,¹...,...²] ... \stopstyle</code> * inherits: \setupstyle
<code>\startstyle [...¹] ... \stopstyle</code> * NAME FONT
<code>\startSTYLE ... \stopSTYLE</code>
<code>\startsubcolumnset [¹...] [...,²...,...³] ... \stopsubcolumnset</code> 1 NAME 2 inherits: \setupsubcolumnset
<code>\startsubcolumnsetgroup [¹...] [...,²...,...³] ... \stopsubcolumnsetgroup</code> 1 NAME 2 inherits: \setupsubcolumnset
<code>\startsubformulas [...¹;...²] ... \stopsubformulas</code> * + - REFERENCE

```

\startsubjectlevel      [1...]      [...,2...,...]      [...,3...,...] ... \stopsubjectlevel
1  NAME                  OPT
2  titlu                 = TEXT
   semncarte             = TEXT
   marcaje               = TEXT
   lista                 = TEXT
   referinta             = REFERENCE
   referencetext         = TEXT
   numarpropriu          = TEXT
   placeholder           = TEXT
3  KEY = VALUE

```

\startsubnumberinghere ... \stopsubnumberinghere

\startsubparagraph ... \stopsubparagraph

\startsubsentence ... \stopsubsentence

$$\backslash\mathrm{startsubsoltablel} \quad [\dots] \quad \dots \quad \backslash\mathrm{stopsubsoltablel}$$

* NAME

\startsubstack ... \stopsubstack

$$\backslash\text{startsuspendat} \quad [\dots, \dots, \overset{1}{=}\dots, \dots] \quad \{\dots\} \dots \backslash\text{stopsuspendat}$$

```
1 inherits: \setuphanging OPT
```

2 CONTENT

```
\startsuspendat [...] {...} ... \stopsuspendat
```

1 stanga dreapta

2 CONTENT

$$\backslash\mathrm{startsymbolset} \quad [\dots] \quad [\dots,\dots,\overset{2}{=}\dots] \quad \dots \quad \backslash\mathrm{stopsymbolset}$$

1 NAME

```
2 font = FONT
```

```
\startsynchroizing ... \stopsynchroizing
```

$$\backslash\mathrm{startTABLE} \quad [\ldots\ldots^*=\ldots\ldots] \quad \ldots \quad \backslash\mathrm{stopTABLE}$$

```
* inherits: \setupTABLEOPT
```

$$\backslash\mathrm{startTABLEbody} \quad [\dots, \dots = \dots, \dots] \quad \dots \quad \backslash\mathrm{stopTABLEbody}$$

```
* inherits: \setupTABLE
```

`\startTABLEfoot` `[.....*=.....]` `\stopTABLEfoot`

```
* inherits: \setupTABLE
```

\startTABLEhead [...] ... \stopTABLEhead

```
* inherits: \setupTABLE
```

$$\backslash\mathrm{startTABLEnext} \quad [\ldots\ldots\overset{*}{=}\ldots\ldots] \quad \ldots \quad \backslash\mathrm{stopTABLEnext}$$

```
* inherits: \setupTABLE
```

\starttabellele [|...|] ... \stoptabellele

* TEMPLATE

\starttabellele [...] ... \stoptabellele

* NAME

$\backslash\text{starttabelul}$ $[^1]$ $[^2]$... $\backslash\text{stoptabelul}$ 1 TEMPLATE OPT 2 inherits: \seteazatabele
$\backslash\text{starttabelul}$ $[^1]$ $[^2]$... $\backslash\text{stoptabelul}$ 1 NAME OPT 2 inherits: \seteazatabele
$\backslash\text{starttabulate}$ $[^1]$ $[^2]$... $\backslash\text{stoptabulate}$ 1 TEMPLATE OPT OPT 2 inherits: \seteazatabulatori
$\backslash\text{starttabulatehead}$ $[^*]$... $\backslash\text{stoptabulatehead}$ * NAME OPT
$\backslash\text{starttabulatetail}$ $[^*]$... $\backslash\text{stoptabulatetail}$ * NAME OPT
$\backslash\text{startTABULATE}$ $[^1]$ $[^2]$... $\backslash\text{stopTABULATE}$ 1 NAME OPT OPT 2 inherits: \seteazatabulatori instances: legend fact
$\backslash\text{startfact}$ $[^1]$ $[^2]$... $\backslash\text{stopfact}$ 1 NAME OPT OPT 2 inherits: \seteazatabulatori
$\backslash\text{startlegend}$ $[^1]$ $[^2]$... $\backslash\text{stoplegend}$ 1 NAME OPT OPT 2 inherits: \seteazatabulatori
$\backslash\text{starttexcode}$... $\backslash\text{stoptexcode}$
$\backslash\text{starttexdefinition}$ 1 2 3 ... $\backslash\text{stoptexdefinition}$ 1 spaces nospaces global tolerant frozen permanent instance mutable immutable protejat semiprotected unexpanded expanded singleempty doubleempty tripleempty quadrupleempty quintupleempty sextupleempty singleargument doubleargument tripleargument quadrupleargument quintupleargument sextupleargument 2 NAME 3 TEMPLATE
$\backslash\text{starttext}$... $\backslash\text{stoptext}$
$\backslash\text{starttextajutator}$ $[^*]$... $\backslash\text{stoptextajutator}$ * REFERENCE OPT
$\backslash\text{starttextbackground}$ $[^1]$ $[^2]$... $\backslash\text{stoptextbackground}$ 1 NAME OPT 2 inherits: \setuptextbackground
$\backslash\text{starttextbackgroundmanual}$... $\backslash\text{stoptextbackgroundmanual}$
$\backslash\text{startTEXTBACKGROUND}$ $[^*,^*]$... $\backslash\text{stopTEXTBACKGROUND}$ * inherits: \setuptextbackground OPT
$\backslash\text{starttextcolor}$ $[^*]$... $\backslash\text{stoptextcolor}$ * COLOR
$\backslash\text{starttextcolorintent}$... $\backslash\text{stoptextcolorintent}$

$\backslash\text{startTEXTDISPLAY} \quad [\dots\overset{*}{=}\dots] \dots \backslash\text{stopTEXTDISPLAY}$ * inherits: $\backslash\text{setuptextdisplay}$ OPT instances: textdisplay
$\backslash\text{starttextdisplay} \quad [\dots\overset{*}{=}\dots] \dots \backslash\text{stoptextdisplay}$ * inherits: $\backslash\text{setuptextdisplay}$ OPT
$\backslash\text{startLABELtext} \quad [\overset{1}{\dots}] \quad [\overset{2}{\dots}] \dots \backslash\text{stopLABELtext}$ 1 SPRACHE OPT 2 KEY instances: head label mathlabel taglabel unit operator prefix suffix btxlabel
$\backslash\text{startbtxlabeltext} \quad [\overset{1}{\dots}] \quad [\overset{2}{\dots}] \dots \backslash\text{stopbtxlabeltext}$ 1 SPRACHE OPT 2 KEY
$\backslash\text{startheadtext} \quad [\overset{1}{\dots}] \quad [\overset{2}{\dots}] \dots \backslash\text{stopheadtext}$ 1 SPRACHE OPT 2 KEY
$\backslash\text{startlabeltext} \quad [\overset{1}{\dots}] \quad [\overset{2}{\dots}] \dots \backslash\text{stoplabeltext}$ 1 SPRACHE OPT 2 KEY
$\backslash\text{startmathlabeltext} \quad [\overset{1}{\dots}] \quad [\overset{2}{\dots}] \dots \backslash\text{stopmathlabeltext}$ 1 SPRACHE OPT 2 KEY
$\backslash\text{startoperatortext} \quad [\overset{1}{\dots}] \quad [\overset{2}{\dots}] \dots \backslash\text{stopoperatortext}$ 1 SPRACHE OPT 2 KEY
$\backslash\text{startprefixtext} \quad [\overset{1}{\dots}] \quad [\overset{2}{\dots}] \dots \backslash\text{stopprefixtext}$ 1 SPRACHE OPT 2 KEY
$\backslash\text{startsuffixtext} \quad [\overset{1}{\dots}] \quad [\overset{2}{\dots}] \dots \backslash\text{stopsuffixtext}$ 1 SPRACHE OPT 2 KEY
$\backslash\text{starttaglabeltext} \quad [\overset{1}{\dots}] \quad [\overset{2}{\dots}] \dots \backslash\text{stoptaglabeltext}$ 1 SPRACHE OPT 2 KEY
$\backslash\text{startunittext} \quad [\overset{1}{\dots}] \quad [\overset{2}{\dots}] \dots \backslash\text{stopunittext}$ 1 SPRACHE OPT 2 KEY
$\backslash\text{starttextflow} \quad [\overset{*}{\dots}] \dots \backslash\text{stoptextflow}$ * NAME
$\backslash\text{startFRAMEDTEXT} \quad [\overset{1}{\dots}] \quad [\dots\overset{2}{=}\dots] \dots \backslash\text{stopFRAMEDTEXT}$ 1 stanga dreapta centru OPT nfiunul 2 inherits: $\backslash\text{setupframedtext}$ instances: framedtext
$\backslash\text{startframedtext} \quad [\overset{1}{\dots}] \quad [\dots\overset{2}{=}\dots] \dots \backslash\text{stopframedtext}$ 1 stanga dreapta centru OPT nfiunul 2 inherits: $\backslash\text{setupframedtext}$

$\backslash\text{starttitlu}$ [..., ¹ ...] {... ² } ... $\backslash\text{stoptitlu}$ 1 REFERENCE OPT 2 TEXT
$\backslash\text{starttokenlist}$ [...] ... $\backslash\text{stoptokenlist}$ * NAME
$\backslash\text{starttokens}$ [...] ... $\backslash\text{stoptokens}$ * NAME
$\backslash\text{starttransliteration}$ [... ¹] [..., ² ...,... ³] ... $\backslash\text{stoptransliteration}$ 1 NAME OPT 2 inherits: $\backslash\text{setuptransliteration}$
$\backslash\text{starttransparent}$ [...] ... $\backslash\text{stoptransparent}$ * COLOR
$\backslash\text{starttypescript}$ [..., ¹ ...] [..., ² ...] [..., ³ ...] ... $\backslash\text{stoptypescript}$ 1 serif sans mono math handwriting calligraphy OPT 2 NAME 3 dimensiune nume
$\backslash\text{starttypescriptcollection}$ [...] ... $\backslash\text{stoptypescriptcollection}$ * NAME
$\backslash\text{startTYPING}$ [..., [*] ...,... ^{OPT}] ... $\backslash\text{stopTYPING}$ * inherits: $\backslash\text{seteazatyping}$ instances: typing LUA MP PARSEDXML TEX XML
$\backslash\text{startTYPING}$ [..., [*] ...] ... $\backslash\text{stopTYPING}$ * continuu OPT instances: typing LUA MP PARSEDXML TEX XML
$\backslash\text{startLUA}$ [..., [*] ...] ... $\backslash\text{stopLUA}$ * continuu OPT
$\backslash\text{startMP}$ [..., [*] ...] ... $\backslash\text{stopMP}$ * continuu OPT
$\backslash\text{startPARSEDXML}$ [..., [*] ...] ... $\backslash\text{stopPARSEDXML}$ * continuu OPT
$\backslash\text{startTEX}$ [..., [*] ...] ... $\backslash\text{stopTEX}$ * continuu OPT
$\backslash\text{starttyping}$ [..., [*] ...] ... $\backslash\text{stoptyping}$ * continuu OPT
$\backslash\text{startXML}$ [..., [*] ...] ... $\backslash\text{stopXML}$ * continuu OPT
$\backslash\text{startLUA}$ [..., [*] ...,... ^{OPT}] ... $\backslash\text{stopLUA}$ * inherits: $\backslash\text{seteazatyping}$
$\backslash\text{startMP}$ [..., [*] ...,... ^{OPT}] ... $\backslash\text{stopMP}$ * inherits: $\backslash\text{seteazatyping}$

$\backslash\text{startPARSEDXML}$ $[\dots, \dots^* \dots, \dots]$... $\backslash\text{stopPARSEDXML}$ * inherits: $\backslash\text{seteazatyping}$ ^{OPT}
$\backslash\text{startTEX}$ $[\dots, \dots^* \dots, \dots]$... $\backslash\text{stopTEX}$ * inherits: $\backslash\text{seteazatyping}$
$\backslash\text{starttyping}$ $[\dots, \dots^* \dots, \dots]$... $\backslash\text{stoptyping}$ * inherits: $\backslash\text{seteazatyping}$ ^{OPT}
$\backslash\text{startXML}$ $[\dots, \dots^* \dots, \dots]$... $\backslash\text{stopXML}$ * inherits: $\backslash\text{seteazatyping}$ ^{OPT}
$\backslash\text{startuniqueMPgraphic}$ $\{\dots^1\}$ $\{\dots, \dots^2, \dots\}$... $\backslash\text{stopuniqueMPgraphic}$ 1 NAME ^{OPT} 2 KEY
$\backslash\text{startuniqueMPpagegraphic}$ $\{\dots^1\}$ $\{\dots, \dots^2, \dots\}$... $\backslash\text{stopuniqueMPpagegraphic}$ 1 NAME ^{OPT} 2 KEY
$\backslash\text{startusableMPgraphic}$ $\{\dots^1\}$ $\{\dots, \dots^2, \dots\}$... $\backslash\text{stopusableMPgraphic}$ 1 NAME ^{OPT} 2 KEY
$\backslash\text{startuseMPgraphic}$ $\{\dots^1\}$ $\{\dots, \dots^2, \dots\}$... $\backslash\text{stopuseMPgraphic}$ 1 NAME ^{OPT} 2 KEY
$\backslash\text{startusemathstyleparameter}$ $\backslash^* \dots$... $\backslash\text{stopusemathstyleparameter}$ * CSNAME
$\backslash\text{startuserdata}$ $[\dots^1]$ $[\dots, \dots^2 \dots, \dots]$... $\backslash\text{stopuserdata}$ 1 NAME ^{OPT} ^{OPT} 2 KEY = VALUE
$\backslash\text{startUSERDATA}$ $[\dots, \dots^* \dots, \dots]$... $\backslash\text{stopUSERDATA}$ * KEY = VALUE ^{OPT}
$\backslash\text{startusingbt specification}$ $[\dots]$... $\backslash\text{stopusingbt specification}$ * NAME
$\backslash\text{startvboxregister}$ $\dots$... $\backslash\text{stopvboxregister}$ * CSNAME NUMMER
$\backslash\text{startvboxto hbox}$... $\backslash\text{stopvboxto hbox}$
$\backslash\text{startvboxto hboxseparator}$... $\backslash\text{stopvboxto hboxseparator}$
$\backslash\text{startverticalbox}$ $[\dots^1]$ $[\dots, \dots^2 \dots, \dots]$... $\backslash\text{stopverticalbox}$ 1 NAME ^{OPT} ^{OPT} 2 inherits: $\backslash\text{setupverticalbox}$
$\backslash\text{startviewerlayer}$ $[\dots]$... $\backslash\text{stopviewerlayer}$ * NAME
$\backslash\text{startVIEWERLAYER}$... $\backslash\text{stopVIEWERLAYER}$

<pre> \startvtopregister .* ... \stopvtopregister * CSNAME NUMBER </pre>
<pre> \startxcell [¹...] [...,²...,...] ... \stopxcell 1 NAME OPT OPT 2 nx = NUMBER ny = NUMBER nc = NUMBER nr = NUMBER inherits: \setupxtable </pre>
<pre> \startxcellgroup [¹] [...,²...,...] ... \stopxcellgroup 1 NAME OPT OPT 2 inherits: \setupxtable </pre>
<pre> \startxcolumn [...,[*]...,...] ... \stopxcolumn * inherits: \setupxtable OPT </pre>
<pre> \startxcolumn [...] ... \stopxcolumn * NAME OPT </pre>
<pre> \startxgroup [¹] [...,²...,...] ... \stopxgroup 1 NAME OPT OPT 2 inherits: \setupxtable </pre>
<pre> \startxmldisplayverbatim [...] ... \stopxmldisplayverbatim * NAME </pre>
<pre> \startxmllineverbatim [...] ... \stopxmllineverbatim * NAME </pre>
<pre> \startxmlraw ... \stopxmlraw </pre>
<pre> \startxmlsetups [...] ... \stopxmlsetups * NAME </pre>
<pre> \startxmlsetups .* ... \stopxmlsetups * NAME </pre>
<pre> \startxrow [¹] [...,²...,...] ... \stopxrow 1 NAME OPT OPT 2 inherits: \setupxtable </pre>
<pre> \startxrowgroup [¹] [...,²...,...] ... \stopxrowgroup 1 NAME OPT OPT 2 inherits: \setupxtable </pre>
<pre> \startxtable [...,[*]...,...] ... \stopxtable * inherits: \setupxtable OPT </pre>
<pre> \startxtablebody [...,[*]...,...] ... \stopxtablebody * inherits: \setupxtable OPT </pre>
<pre> \startxtablebody [...] ... \stopxtablebody * NAME OPT </pre>
<pre> \startxtablefoot [...,[*]...,...] ... \stopxtablefoot * inherits: \setupxtable OPT </pre>

<pre> \startxtablefoot [...] ... \stopxtablefoot * NAME OPT </pre>

<pre> \startxtablehead [...,*=...,...] ... \stopxtablehead * inherits: \setupxtable OPT </pre>
--

<pre> \startxtablehead [...] ... \stopxtablehead * NAME OPT </pre>

<pre> \startxtablenext [...,*=...,...] ... \stopxtablenext * inherits: \setupxtable </pre>	OPT
---	-----

<pre> \startxtablename [.*] ... \stopxtablename * NAME OPT </pre>

<pre> \startXTABLE [...,*...,...] ... \stopXTABLE * inherits: \setupxtable^{OPT} </pre>
--

<pre> \startxtable [...] ... \stopxtable * NAME OPT </pre>
--

```
\stivacampuri    [1...]    [...,2...]    [...,3..3,...]
```

```
1 NAME  
2 NAME  
3 inherits: \setupfieldcategory
```

```
\stopLINENOTE    [...]
```

```
*    REFERENCE
```

```
instances: linenote
```

`\stoplinenote` [...]

* REFERENCE

\stoplinie [..]
 * REFERENCE

```
\strictdoifelsenextoptional    {...}    {...}
1    TRUE
2    FALSE
```

```
\strictdoifnextoptionalelse    {...}    {...}
1  TRUE
2  FALSE
```

<pre> \stripcharacter .¹. \from .². \to \.³. 1 CHARACTER 2 TEXT 3 CSNAME </pre>
--

<pre>\strippedcsname *... * CSNAME</pre>

```
\strippedcsname    ...
*   TEXT
```

<pre> \stripspaces \from ... \to ... 1 TEXT 2 CSNAME </pre>
--

<code>\structurelistnumber</code>
<code>\structurelistdrawnumber {...}</code> <code>* LISTE</code>
<code>\structurelistdrawpagenumber {...}</code> <code>* LISTE</code>
<code>\structurelistdrawrealpagenumber {...}</code> <code>* LISTE</code>
<code>\structurelistrealpagenumber</code>
<code>\structurelistuserpagenumber</code>
<code>\structurelistuservariable {...}</code> <code>* KEY</code>
<code>\structurenumber</code>
<code>\structuretitle</code>
<code>\structureuservariable {...}</code> <code>* KEY</code>
<code>\structurevariable {...}</code> <code>* KEY</code>
<code>\strut</code>
<code>\strutdp</code>
<code>\strutgap</code>
<code>\strutht</code>
<code>\struthtdp</code>
<code>\struttedbox {...}</code> <code>* CONTENT</code>
<code>\strutwd</code>
<code>\style [...¹...²...] {...}</code> <code>1 inherits: \setupstyle</code> <code>2 TEXT</code>
<code>\styleinstance [...]</code> <code>* NAME</code>
<code>\style [¹...] {...}</code> <code>1 NAME FONT</code> <code>2 TEXT</code>
<code>\STYLE {...}</code> <code>* TEXT</code>

<code>\subpagenumber</code>
<code>\subparagraph</code>
$\backslash\mathrm{subprescr}\quad\left[\begin{smallmatrix}1\\ \dots\end{smallmatrix}\right]\quad\{\begin{smallmatrix}2\\ \dots\end{smallmatrix}\}$ 1 DIMENSION OPT 2 TEXT
$\backslash\mathrm{subscr}\quad\left[\begin{smallmatrix}1\\ \dots\end{smallmatrix}\right]\quad\{\begin{smallmatrix}2\\ \dots\end{smallmatrix}\}$ 1 DIMENSION OPT 2 TEXT
$\backslash\mathrm{subsentence}\quad\{\begin{smallmatrix}1\\ \dots\end{smallmatrix}\}$ * CONTENT
$\backslash\mathrm{substituteincommalist}\quad\{\begin{smallmatrix}1\\ \dots\end{smallmatrix}\}\quad\{\begin{smallmatrix}2\\ \dots\end{smallmatrix}\}\quad\backslash\begin{smallmatrix}3\\ \dots\end{smallmatrix}$ 1 TEXT 2 TEXT 3 CSNAME
$\backslash\mathrm{subsupprescr}\quad\left[\begin{smallmatrix}1\\ \dots\end{smallmatrix}\right]\quad\{\begin{smallmatrix}2\\ \dots\end{smallmatrix}\}\quad\{\begin{smallmatrix}3\\ \dots\end{smallmatrix}\}$ 1 DIMENSION OPT 2 TEXT 3 TEXT
$\backslash\mathrm{subsupscr}\quad\left[\begin{smallmatrix}1\\ \dots\end{smallmatrix}\right]\quad\{\begin{smallmatrix}2\\ \dots\end{smallmatrix}\}\quad\{\begin{smallmatrix}3\\ \dots\end{smallmatrix}\}$ 1 DIMENSION OPT 2 TEXT 3 TEXT
$\backslash\mathrm{subtractfeature}\quad\left[\begin{smallmatrix}1\\ \dots\end{smallmatrix}\right]$ * NAME
$\backslash\mathrm{subtractfeature}\quad\{\begin{smallmatrix}1\\ \dots\end{smallmatrix}\}$ * NAME
$\backslash\mathrm{supprescr}\quad\left[\begin{smallmatrix}1\\ \dots\end{smallmatrix}\right]\quad\{\begin{smallmatrix}2\\ \dots\end{smallmatrix}\}$ 1 DIMENSION OPT 2 TEXT
$\backslash\mathrm{supscr}\quad\left[\begin{smallmatrix}1\\ \dots\end{smallmatrix}\right]\quad\{\begin{smallmatrix}2\\ \dots\end{smallmatrix}\}$ 1 DIMENSION OPT 2 TEXT
$\backslash\mathrm{supsubprescr}\quad\left[\begin{smallmatrix}1\\ \dots\end{smallmatrix}\right]\quad\{\begin{smallmatrix}2\\ \dots\end{smallmatrix}\}\quad\{\begin{smallmatrix}3\\ \dots\end{smallmatrix}\}$ 1 DIMENSION OPT 2 TEXT 3 TEXT
$\backslash\mathrm{supsubscr}\quad\left[\begin{smallmatrix}1\\ \dots\end{smallmatrix}\right]\quad\{\begin{smallmatrix}2\\ \dots\end{smallmatrix}\}\quad\{\begin{smallmatrix}3\\ \dots\end{smallmatrix}\}$ 1 DIMENSION OPT 2 TEXT 3 TEXT
$\backslash\mathrm{swapcounts}\quad\backslash\begin{smallmatrix}1\\ \dots\end{smallmatrix}\quad\backslash\begin{smallmatrix}2\\ \dots\end{smallmatrix}$ 1 CSNAME 2 CSNAME
$\backslash\mathrm{swapdimens}\quad\backslash\begin{smallmatrix}1\\ \dots\end{smallmatrix}\quad\backslash\begin{smallmatrix}2\\ \dots\end{smallmatrix}$ 1 CSNAME 2 CSNAME

<code>\swapface</code>
<code>\swapmacros \.¹ \.²</code> 1 CSNAME 2 CSNAME
<code>\swaptypeface</code>
<code>\switchstyleonly [...]</code> * rm ss tt hw cg roman serif regular sans sansserif suport type teletype mono scrismmanual caligrafic
<code>\switchstyleonly \.</code> * CSNAME
<code>\switchtocolour [...]</code> * COLOR
<code>\switchtointerlinespace [...,¹...] [...,²...,...]</code> 1 NAME OPT 2 inherits: \seteazaspasiuinterliniar
<code>\switchtointerlinespace [...*,...]</code> * on dezactivat reset auto mic mediu OPT are NUMMER DIMENSION
<code>\switchtointerlinespace [...]</code> * NAME
<code>\symbolreference [...]</code> * REFERENCE
<code>\sync {.¹} .²</code> 1 NAME 2 NUMMER
<code>\syncanchor {.¹} {.²} {.³}</code> 1 NAME 2 NUMMER 3 NUMMER
<code>\synchronizealignpass</code>
<code>\synchronizeblank</code>
<code>\synchronizeindenting</code>
<code>\synchronizelocalanchors .*</code> * CSNAME NUMMER
<code>\synchronizemarking [...¹] [...²] [...³]</code> 1 BESCHRIFTUNG OPT 2 NUMMER 3 mentine
<code>\synchronizeoutputstreams [...*,...]</code> * NAME
<code>\synchronizestrut {.*}</code> * da nu auto cap ajustat linie implicit CHARACTER

<code>\synchronizewhitespace</code>
<code>\synctexblockfilename {...}</code> <code>* FILE</code>
<code>\synctexresetfilename</code>
<code>\synctexsetfilename {...}</code> <code>* FILE</code>
<code>\synonymfirstuserpage [.¹.] [.².]</code> <code>1 NAME</code> <code>2 NAME</code>
<code>\synonymmeaning [.¹.] [.².]</code> <code>1 NAME</code> <code>2 NAME</code>
<code>\synonymname [.¹.] [.².]</code> <code>1 NAME</code> <code>2 NAME</code>
<code>\synonympages [.¹.] [.².]</code> <code>1 NAME</code> <code>2 NAME</code>
<code>\synonymuserpages [.¹.] [.².]</code> <code>1 NAME</code> <code>2 NAME</code>
<code>\SYNONYM [.¹.] [.².] {...} {...}</code> <code>1 NAME OPT OPT</code> <code>2 TEXT</code> <code>3 TEXT</code> <code>4 CONTENT</code> <code>instances: abbreviation</code>
<code>\abbreviation [.¹.] [.².] {...} {...}</code> <code>1 NAME OPT OPT</code> <code>2 TEXT</code> <code>3 TEXT</code> <code>4 CONTENT</code>
<code>\systemlog {...} {...} {...}</code> <code>1 FILE</code> <code>2 TEXT</code> <code>3 TEXT</code>
<code>\systemlogfirst {...} {...} {...}</code> <code>1 FILE</code> <code>2 TEXT</code> <code>3 TEXT</code>
<code>\systemloglast {...} {...} {...}</code> <code>1 FILE</code> <code>2 TEXT</code> <code>3 TEXT</code>
<code>\systemsetups {...}</code> <code>* NAME</code>
<code>\TABLE</code>

<code>\TaBlE</code>
<code>\TeX</code>
<code>\TeX</code>
<code>\TheNormalizedFontSize</code>
<code>\TransparencyHack</code>
<code>\tabulateautoline</code>
<code>\tabulateautorule</code>
<code>\tabulateline</code>
<code>\tabulaterule</code>
<code>\taggedctxcommand {...}</code> * BEFEHL
<code>\taggedlabeltexts {...} {...} {...}</code> 1 NAME 2 NAME 3 CONTENT
<code>\tamilnumerals {...}</code> * NUMMER
<code>\tbox {...}</code> * CONTENT
<code>\tcontainer ¹... ²...</code> 1 TEXT OPT 2 CONTENT
<code>\telugunumerals {...}</code> * NUMMER
<code>\testandsplitstring ¹... \at ²... \to \³... \and \⁴...</code> 1 TEXT 2 TEXT 3 CSNAME 4 CSNAME
<code>\testcolumn [¹...] [²...]</code> 1 NUMMER OPT 2 DIMENSION
<code>\testfeature {...} {...}</code> 1 NUMMER 2 CONTENT
<code>\testfeatureonce ¹... ²...</code> 1 NUMMER 2 CONTENT

<pre> \testpage [...]¹ [...]² 1 NUMBER OPT 2 DIMENSION </pre>
<pre> \testpageonly [...]¹ [...]² 1 NUMBER OPT 2 DIMENSION </pre>
<pre> \testpagesync [...]¹ [...]² 1 NUMBER OPT 2 DIMENSION </pre>
<pre> \testtokens [...] * NAME </pre>
<pre> \tex {...} * CONTENT </pre>
<pre> \texbuffer [...][*] * BUFFER OPT </pre>
<pre> \texbuffer {...} * BUFFER </pre>
<pre> \texdefinition {...} * NAME </pre>
<pre> \texsetup {...} * NAME </pre>
<pre> \textajutator [...]¹ {...}² {...}³ 1 REFERENCE OPT 2 TEXT 3 TEXT </pre>
<pre> \TEXTBACKGROUND {...} * CONTENT </pre>
<pre> \textcitation [...]¹ [...]² 1 referinta = REFERENCE^{OPT} alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 REFERENCE </pre>
<pre> \textcitation [...]¹ [...]² 1 implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear 2 REFERENCE </pre>
<pre> \textcitation [...]¹ [...]² 1 referinta = REFERENCE alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 KEY = VALUE </pre>

<pre> \textcite [...] [¹...] [...] [²] 1 referinta = REFERENCE alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 REFERENCE </pre>
<pre> \textcite [...] [¹] [...] [²] 1 implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear 2 REFERENCE </pre>
<pre> \textcite [...] [¹...] [...] [²...] 1 referinta = REFERENCE alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 KEY = VALUE </pre>
<pre> \textcontrolspace </pre>
<pre> \LABELtext {...} * KEY instances: head label mathlabel taglabel unit operator prefix suffix btxlabel </pre>
<pre> \btxlabeltext {...} * KEY </pre>
<pre> \headtext {...} * KEY </pre>
<pre> \labeltext {...} * KEY </pre>
<pre> \mathlabeltext {...} * KEY </pre>
<pre> \operatortext {...} * KEY </pre>
<pre> \prefixtext {...} * KEY </pre>
<pre> \suffixtext {...} * KEY </pre>
<pre> \taglabeltext {...} * KEY </pre>
<pre> \unittext {...} * KEY </pre>
<pre> \textflowcollector {...} * NAME </pre>

$\backslash\text{texthere}$ [¹ ...] { ² ...} 1 stanga dreapta ^{OPT} inainte dupa intre 2 CONTENT
$\backslash\text{FRAMEDTEXT}$ [..., ¹ ...,...] { ² ...} 1 inherits: $\backslash\text{setupframedtext}$ ^{OPT} 2 CONTENT instances: framedtext
$\backslash\text{framedtext}$ [..., ¹ ...,...] { ² ...} 1 inherits: $\backslash\text{setupframedtext}$ ^{OPT} 2 CONTENT
$\backslash\text{textrmath}$ { [*] ...} * CONTENT
$\backslash\text{textminus}$
$\backslash\text{textnote}$ [..., ¹ ...,...] { ² ...} 1 inherits: $\backslash\text{setuptextnote}$ ^{OPT} 2 TEXT
$\backslash\text{textormathchar}$ { [*] ...} * NUMMER
$\backslash\text{textormathchars}$ { [*] ...} * CHARACTER
$\backslash\text{textplus}$
$\backslash\text{textstacker}$ [¹ ...] { ² ...} { ³ ...} { ⁴ ...} 1 reverse matematica ^{OPT} text chemistry 2 NUMMER 3 TEXT 4 TEXT
$\backslash\text{textumplere}$ [..., ¹ ...,...] { ² ...} { ³ ...} 1 inherits: $\backslash\text{seteazarigledumplere}$ ^{OPT} 2 TEXT 3 TEXT
$\backslash\text{textvisiblespace}$
$\backslash\text{thainumerals}$ { [*] ...} * NUMMER
$\backslash\text{thedatavalue}$ { [*] ...} * NAME
$\backslash\text{thefirstcharacter}$ { [*] ...} * TEXT
$\backslash\text{thenormalizedbodyfontsize}$ { [*] ...} * DIMENSION
$\backslash\text{theorientation}$ { [*] ...} * normal up down stanga dreapta sus subsol NAME

\theremainingcharacters {...} * TEXT
\thickspace
\thinspace
\thirddoffivearguments {... ¹ } {... ² } {... ³ } {... ⁴ } {... ⁵ } 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT
\thirddoffourarguments {... ¹ } {... ² } {... ³ } {... ⁴ } 1 TEXT 2 TEXT 3 TEXT 4 TEXT
\thirddofsixarguments {... ¹ } {... ² } {... ³ } {... ⁴ } {... ⁵ } {... ⁶ } 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT
\thirddofthreearguments {... ¹ } {... ² } {... ³ } 1 TEXT 2 TEXT 3 TEXT
\thirddofthreeunexpanded {... ¹ } {... ² } {... ³ } 1 TEXT 2 TEXT 3 TEXT
\threedigitrounding {...} * NUMMER
\tibetannumerals {...} * NUMMER
\tightfitboundary
\tightfitcompensation
\tightlayer [...] * NAME
\time [...,... ^{OPT} ...,...] * metoda = sta ^{OPT} tt aici curent h = NUMMER m = NUMMER s = NUMMER
\tinyfont
\tinyinfofont

<code>\tinyinfofontbold</code>
<code>\tlap {...}</code> <code>* CONTENT</code>
<code>\tochar {...}</code> <code>* e:NAME x:NUMBER d:NUMBER s:NUMBER i:NUMBER n:NAME c:NAME u:NAME a:NAME</code>
<code>\tolinenote [...]</code> <code>* REFERENCE</code>
<code>\TOOLTIP [...¹...²...³]{...}{...}</code> <code>1 inherits: \setuptooltip</code> <code>2 TEXT</code> <code>3 TEXT</code> <code>instances: tooltip</code>
<code>\TOOLTIP [...¹]{...²}{...³}</code> <code>1 stanga centrul de greutate</code> <code>2 TEXT</code> <code>3 TEXT</code> <code>instances: tooltip</code>
<code>\tooltip [...¹]{...²}{...³}</code> <code>1 stanga centrul de greutate</code> <code>2 TEXT</code> <code>3 TEXT</code>
<code>\tooltip [...¹...²...³]{...}{...}</code> <code>1 inherits: \setuptooltip</code> <code>2 TEXT</code> <code>3 TEXT</code>
<code>\topbox {...}</code> <code>* CONTENT</code>
<code>\topleftbox {...}</code> <code>* CONTENT</code>
<code>\toplinebox {...}</code> <code>* CONTENT</code>
<code>\toprightbox {...}</code> <code>* CONTENT</code>
<code>\topskippedbox {...}</code> <code>* CONTENT</code>
<code>\tracecatcodetables</code>
<code>\tracedfontname {...}</code> <code>* FONT</code>
<code>\tracedpagestate</code>
<code>\traceoutputroutines</code>
<code>\tracepositions</code>

<code>\tracingall</code>
<code>\tracingnone</code>
<code>\tracingprocess</code>
<code>\tracingtypesetting</code>
<code>\traduce [...]*...]</code> <code>* SPRACHE = TEXT OPT</code>
<code>\transliterate [...] {...}</code> 1 NAME 2 TEXT
<code>\transliteratebuffer [...] {...}</code> 1 NAME 2 BUFFER
<code>\transliterated [...] {...}</code> 1 NAME 2 TEXT
<code>\transliteratedbuffer [...] {...}</code> 1 NAME 2 BUFFER
<code>\transliteration [...] {...}</code> 1 NAME 2 TEXT
<code>\transliterationexception [...] {...} {...}</code> 1 NAME 2 TEXT 3 TEXT
<code>\transliteration {...} {...}</code> 1 NAME 2 TEXT
<code>\transparencycomponents {...}</code> * COLOR
<code>\transparent [...] {...}</code> 1 COLOR 2 CONTENT
<code>\traverseblock {...} {...}</code> 1 digitsarabicindic digitsbold digitsdoublestruck digitsextendedarabicindic digitslatin digitsmonospace digitsnormal digitssansserifbold digitssansserifnormal geometricshapes letterlikesymbols lowercasebold lowercaseboldfraktur lowercasebolditalic lowercaseboldscript lowercasedoublestruck lowercasefraktur lowercasegreekbold lowercasegreekbolditalic lowercasegreekitalic lowercasegreeknormal lowercasegreeksansserifbold lowercasegreeksansserifbolditalic lowercaseitalic lowercasemonospace lowercasenormal lowercasesansserifbold lowercasesansserifbolditalic lowercasesansserifitalic lowercasesansserifnormal lowercasescript mathematicalalphanumericsymbols mathematicaloperators miscellaneousmathematicalsymbolsa miscellaneousmathematicalsymbolsb miscellaneoussymbols andarrows miscellaneoustechnical supplementalarrowsa supplementalarrowsb supplementalarrowsc supplementalmathematicaloperators uppercasebold uppercaseboldfraktur uppercasebolditalic uppercaseboldscript uppercasedoublestruck uppercasefraktur uppercasegreekbold uppercasegreekbolditalic uppercasegreekitalic uppercasegreeknormal uppercasegreeksansserifbold uppercasegreeksansserifbolditalic uppercaseitalic uppercasemonospace uppercasenormal uppercasesansserifbold uppercasesansserifbolditalic uppercasesansserifitalic uppercasesansserifnormal uppercasescript lowercasecalligraphic uppercasecalligraphic lowercaseboldcalligraphic uppercaseboldcalligraphic lowercasesansgreek uppercasesansgreek lowercaseitalicsansgreek uppercaseitalicsansgreek lowercaseblackboarditalic uppercaseblackboarditalic 2 BEFEHL

```
\traversemath {...} {...} {...} {...}
1 regular sansserif monospaced fraktur script caligrafic blackboard
2 normal aldin aldinitalic italic
3 ucletters lcletters digits ucgreek lcgreek symbols
4 BEFEHL
```

```
\trecilafonttext    [...,*,...]  
* inherits: \seteazafonttext
```

<pre>\triggergroupedcommand {...} * BEFEHL</pre>

```
\triggergroupedcommandcs \*...
* CSNAME
```

<code>\triplebond</code>

```
\truefilename    {...}
*   FILE
```

```
\truefontname    {...}
*   FONT
```

$\text{\tt\raggedright}$

\TWEAKEDFONT

```
\twodigitrounding  {...}
*  NUMMER
```

$\backslash tx$

<code>\ttx</code>

```
\typ    [...,\stackrel{1}{...}]    {\stackrel{2}{...}}
1    inherits: \setfeazatype
2    CONTENT
```

```
\type      [...1...]{...2}
1 inherits: \set@azatype
2 CONTENT
```

```
\typedefinedbuffer    [..1.]    [.....2...]
```

```
1  BUFFER
```

```
2  inherits: \seteazatyping
```

<code>\typeface</code>

```
\typefile      [1.]      [...,2...,...]  {3...}
1  NAME
   OPT
2  inherits: \seteazatyping
3  FILE
```

```
\typeinlinebuffer      [...,1...]      [...,2...,...]
1  BUFFER              OPT              OPT
2  inherits: \seteazatype
```

<code>\typescriptone</code>

* NAME

\typescripttwo

1	* BUFFER	OPT	OPT
2	3	4	5
6	7	8	9
10	11	12	13
14	15	16	17
18	19	20	21
22	23	24	25
26	27	28	29
30	31	32	33
34	35	36	37
38	39	40	41
42	43	44	45
46	47	48	49
50	51	52	53
54	55	56	57
58	59	60	61
62	63	64	65
66	67	68	69
70	71	72	73
74	75	76	77
78	79	80	81
82	83	84	85
86	87	88	89
90	91	92	93
94	95	96	97
98	99	100	101
102	103	104	105
106	107	108	109
110	111	112	113
114	115	116	117
118	119	120	121
122	123	124	125
126	127	128	129
130	131	132	133
134	135	136	137
138	139	140	141
142	143	144	145
146	147	148	149
150	151	152	153
154	155	156	157
158	159	160	161
162	163	164	165
166	167	168	169
170	171	172	173
174	175	176	177
178	179	180	181
182	183	184	185
186	187	188	189
190	191	192	193
194	195	196	197
198	199	200	201
202	203	204	205
206	207	208	209
210	211	212	213
214	215	216	217
218	219	220	221
222	223	224	225
226	227	228	229
230	231	232	233
234	235	236	237
238	239	240	241
242	243	244	245
246	247	248	249
250	251	252	253
254	255	256	257
258	259	260	261
262	263	264	265
266	267	268	269
270	271	272	273
274	275	276	277
278	279	280	281
282	283	284	285
286	287	288	289
290	291	292	293
294	295	296	297
298	299	300	301
302	303	304	305
306	307	308	309
310	311	312	313
314	315	316	317
318	319	320	321
322	323	324	325
326	327	328	329
330	331	332	333
334	335	336	337
338	339	340	341
342	343	344	345
346	347	348	349
350	351	352	353
354	355	356	357
358	359	360	361
362	363	364	365
366	367	368	369
370	371	372	373
374	375	376	377
378	379	380	381
382	383	384	385
386	387		

```
1 * BUFFER
```

```
2 inherits: \setupexternalfigure
```

```
*      * BUFFER                                OPT
```

1	NAME FILE	OPT	OPT
---	-----------	-----	-----

1 NAME FILE

```

1  NAME  FEE
2  FILE  TEXT

```

```
3 inherits: \setupexternalfigure
```

1	BUFFER	OPT	OPT
---	--------	-----	-----

1 BUFFER

```

1  DOTTEN
2  inherits: \seteazatyping

```

```
instances: typing LUA MP PARSEDXML TEX XML
```

1	BUFFER	OPT	OPT
---	--------	-----	-----

1 BUFFER

```
1  EOLLEN
2  inherits: \seteazatyping
```

1	BUFFER	OPT	OPT
---	--------	-----	-----

1 BUFFER.

```
1  DOTTED
2  inherits: \seteazatyping
```

1	BUFFER	OPT	OPT
---	--------	-----	-----

1 BUFFER

```
2 inherits: \seteazatyping
```

1	BUFFER	OPT	OPT
---	--------	-----	-----

1 BUFFER

```
1  EOL EN
2  inherits: \seteazatyping
```

1	BUFFER	OPT	OPT
---	--------	-----	-----

1 BUFFER

```
1  DOTTED
2  inherits: \seteazatyping
```

1	BUFFER	OPT	OPT
---	--------	-----	-----

1 BUFFER

```
1  DOTTED
2  inherits: \seteazatyping
```

```
1 inherit: \getoptsyntax OPT
```

```
1 inherits: \seteazatyping
```

2 FILE

```
instances: typing LUA MP PARSEDXML TEX XML
```

```
1 inherit: \getoptatypingOPT
```

```
1 inherits: \seteazatvpinoOPT
```

1 INFO.
2 FILE

1 inherits: \setcopyright

```
1 inherits: \seteazatypingOPT
```

1 TIME
2 FILE

<code>\typePARSEDXMLfile</code> [...,.. ¹ ...,..] {... ² .} 1 inherits: \seteazatyping ^{OPT} 2 FILE
<code>\typeTEXfile</code> [...,.. ¹ ...,..] {... ² .} 1 inherits: \seteazatyping ^{OPT} 2 FILE
<code>\typetypingfile</code> [...,.. ¹ ...,..] {... ² .} 1 inherits: \seteazatyping ^{OPT} 2 FILE
<code>\typeXMLfile</code> [...,.. ¹ ...,..] {... ² .} 1 inherits: \seteazatyping ^{OPT} 2 FILE
<code>\type</code> [...,.. ¹ ...,..] <<... ² >> 1 inherits: \seteazatype ^{OPT} 2 ANGLES
<code>\TYPE</code> [...,.. ¹ ...,..] {... ² .} 1 inherits: \seteazatype ^{OPT} 2 CONTENT
<code>\TYPE</code> [...,.. ¹ ...,..] <<... ² >> 1 inherits: \seteazatype ^{OPT} 2 ANGLES
<code>\typ</code> [...,.. ¹ ...,..] <<... ² >> 1 inherits: \seteazatype ^{OPT} 2 ANGLES
<code>\uchexnumber</code> {...} * NUMMER
<code>\uchexnumbers</code> {...} * NUMMER
<code>\uconvertnumber</code> {... ¹ .} {... ² .} 1 inherits: \converttestenumar 2 NUMMER
<code>\uedcatcodecommand</code> \... ¹ ... ² {... ³ .} 1 CSNAME 2 CHARACTER NUMBER 3 BEFEHL
<code>\ultimasubpagina</code>
<code>\undefinevalue</code> {...} * NAME
<code>\undepthed</code> {...} * CONTENT
<code>\underset</code> {... ¹ .} {... ² .} 1 TEXT 2 TEXT

<code>\undeva {...} {...} [...]</code> 1 TEXT 2 TEXT 3 REFERENCE
<code>\undoassign [...] [...²...]</code> 1 TEXT 2 KEY = VALUE
<code>\unexpandeddocumentvariable {...}</code> * KEY
<code>\unhhbox .¹ \with {...}</code> 1 CSNAME NUMBER 2 BEFEHL
<code>\unicodechar {...}</code> * TEXT
<code>\unicodehexnumber {...}</code> * NUMMER
<code>\unicodenummer {...}</code> * NUMMER
<code>\unihex {...}</code> * NUMMER
<code>\uniqueMPgraphic {...} {...,²...,...}</code> 1 NAME 2 KEY = VALUE
<code>\uniqueMPgraphic [...,¹...,...] {...}</code> 1 instance = metafun # ¹ inifun extrafun lessfun scaledfun doublefun binaryfun decimalfun positfun mprun metapost nofun scaledpost doublepost binarypost decimalpost simplefun descriptiontext = TEXT alternativetext = TEXT KEY = VALUE 2 NAME
<code>\uniqueMPpagegraphic {...} {...,²...,...}</code> 1 NAME 2 KEY = VALUE
<code>\UNIT {...}</code> * CONTENT instances: unit
<code>\unit {...}</code> * CONTENT
<code>\unknownchar</code>
<code>\unprotect ... \protect</code>
<code>\unprotected ... \par</code> * CONTENT

\useCOMANDastyleparameter {...} * KEY
\usecomponent [...] * FILE
\usedadaptivealternative
\usedadaptivebox
\usedadaptivecolor
\usedadaptivedepth
\usedadaptiveheight
\usedadaptivehsize
\usedadaptiveline
\usedadaptivetotal
\usedadaptivewidth
\usedummycolorparameter {...} * KEY
\usedummystyleandcolor {...} {...} 1 KEY 2 KEY
\usedummystyleparameter {...} * KEY
\useenvironment [...] * FILE
\useexternalrendering [...] ¹ [...] ² [...] ³ [...] ⁴ 1 NAME 2 NAME 3 FILE 4 auto embed
\usefigurebase [...] * reset FILE
\usefile [...] ¹ [...] ² [...] ³ 1 NAME 2 FILE 3 TEXT OPT
\usefontpath [...]*,...] * PATH
\usegridparameter *... * CSNAME

\usehyphensparameter *..
* CSNAME
\useindentingparameter *..
* CSNAME
\useindentnextparameter *..
* CSNAME
\useinterlinespaceparameter *..
* CSNAME
\uselanguageparameter *..
* CSNAME
\uselist [. ¹ .] [... ² .] [... ³ .]
1 NAME 2 FILE 3 TEXT
\uselua module [...]
* FILE
\useluatable *..
* CSNAME
\useMPenvironmentbuffer [...]
* NAME
\useMPgraphic {...} {..., ² ...,...}
1 NAME 2 KEY = VALUE
\useMPgraphic [..., ¹ ...,...] {... ² .}
1 instance = metafun minifun extrafun lessfun scaledfun doublefun binaryfun decimalfun positfun mprun descriptiontext = TEXT alternativetext = TEXT 2 NAME
\useMPLibrary [...]
* FILE
\useMPrun {...} {... ² .}
1 NAME 2 NUMBER
\useMPvariables [... ¹ .] [... ² ,...]
1 NAME 2 KEY
\usemathstyleparameter *..
* CSNAME
\useproduct [...]
* FILE
\useprofileparameter *..
* CSNAME

<code>\useproject</code> [...] * FILE
<code>\userreferenceparameter</code> *.. * CSNAME
<code>\userregister</code> [¹ ...] [² ...] [³ ...] [⁴ ...] 1 NAME OPT 2 FILE 3 NAME 4 TEXT
<code>\userpagenumber</code>
<code>\usesetupspareparameter</code> *.. * CSNAME
<code>\usestaticMPfigure</code> [..., ¹ ...,...] [² ...] 1 inherits: \setupscale OPT 2 NAME
<code>\usesubpath</code> [...,*,...] * PATH
<code>\usetexmodule</code> [¹ ...] [..., ² ...,] [..., ³ ...,...] 1 m p s x t OPT OPT 2 FILE 3 KEY = VALUE
<code>\setransliteration</code> [...,*,...] * FILE
<code>\usetypescript</code> [¹ ...] [² ...] [³ ...] 1 serif sans mono math ^{OPT} handwriting calligraphy ^{OPT} casual tot 2 NAME fallback implicit dtp simple 3 dimensiune nume
<code>\usetypescriptfile</code> [...] * reset FILE
<code>\usezipfile</code> [¹ ...] [² ...] 1 FILE OPT 2 FILE
<code>\utfchar</code> {...} * NUMMER
<code>\utflower</code> {...} * TEXT
<code>\utfupper</code> {...} * TEXT
<code>\utilityregisterlength</code>
<code>\VerboseNumber</code> {...} * NUMMER

<code>\validassignment {...}</code> * TEXT
<code>\valoareculoare {...}</code> * COLOR
<code>\vboxreference [...¹,...] {...²}</code> 1 REFERENCE 2 CONTENT
<code>\vbreak</code>
<code>\vcontainer ...¹ {...²}</code> 1 TEXT OPT 2 CONTENT
<code>\verbatim {...}</code> * CONTENT
<code>\verbatimstring {...}</code> * CONTENT
<code>\verbosenumber {...}</code> * NUMMER
<code>\versiune [...]</code> * concept fisier temporar final NAME
<code>\verticalbox [...¹] [...²,...³,...] {...³}</code> 1 NAME OPT 2 inherits: \setupverticalbox OPT 3 CONTENT
<code>\verticalgrowingbar [...[*],...[*],...]</code> * inherits: \setuppositionbar
<code>\verticalpositionbar [...[*],...[*],...]</code> * inherits: \setuppositionbar
<code>\veryraggedcenter</code>
<code>\veryraggedleft</code>
<code>\veryraggedright</code>
<code>\vglue ...</code> * DIMENSION
<code>\widestacking [...[*],...]</code> * NUMMER
<code>\viewerlayer [...¹] {...²}</code> 1 NAME 2 CONTENT
<code>\vl [...]</code> * NUMMER ^{OPT}

<code>\vpackbox</code>
<code>\vpackedbox</code>
<code>\vphantom {...}</code> <code>* CONTENT</code>
<code>\vpos {...} {...}</code> <code>1 NAME</code> <code>2 CONTENT</code>
<code>\vreflected {...}</code> <code>* CONTENT</code>
<code>\vsmash {...}</code> <code>* CONTENT</code>
<code>\vsmashbox ...</code> <code>* CSNAME NUMBER</code>
<code>\vsmashed {...}</code> <code>* CONTENT</code>
<code>\vspace [...]¹ [...]²</code> <code>1 NAME OPT OPT</code> <code>2 NAME</code>
<code>\vspacing [...,*,...]</code> <code>* preferinta aceeași pagina max fortat enable dezactivat faraalb impachetat inapot overlay totdeauna mentine weak strong implicit inainte intre dupa fixat flexibil niciunul mic mediu mare linie jumatatelinie halflinebefore halflineafter quarterline formula alb inaltime adancime standard NUMBER*mic NUMBER*mediu NUMBER*mare NUMBER*linie NUMBER*jumatatelinie NUMBER*quarterline NUMBER*formula NUMBER*alb NUMBER*inaltime NUMBER*adancime category:NUMBER order:NUMBER penalty:NUMBER DIMENSION NAME</code>
<code>\WidthSpanningText {...}¹ {...}² {...}³</code> <code>1 TEXT</code> <code>2 DIMENSION</code> <code>3 FONT</code>
<code>\wdofstring {...}</code> <code>* TEXT</code>
<code>\widthofstring {...}</code> <code>* TEXT</code>
<code>\widthspanningtext {...}¹ {...}² {...}³</code> <code>1 TEXT</code> <code>2 DIMENSION</code> <code>3 FONT</code>
<code>\wipedtokens {...}¹ {...}²</code> <code>1 TEXT</code> <code>2 TEXT</code>
<code>\wipetokens {...}¹ {...}²</code> <code>1 TEXT</code> <code>2 TEXT</code>
<code>\withoutpt {...}</code> <code>* DIMENSION</code>

<code>\words {...}</code> <code>* TEXT</code>
<code>\wordtonumber {...} {...}</code> <code>1 unu doi trei patru cinci</code> <code>2 TEXT</code>
<code>\wrapupparinsert</code>
<code>\writedatatolist [...]¹ [...,...²...,...]^{OPT} [...,...³...,...]</code> <code>1 LISTE</code> <code>2 inherits: \seteazalista</code> <code>3 KEY = VALUE</code>
<code>\writestatus {...} {...}</code> <code>1 TEXT</code> <code>2 TEXT</code>
<code>\XETEX</code>
<code>\XeTeX</code>
<code>\xdefconvertedargument \... {...}</code> <code>1 CSNAME</code> <code>2 TEXT</code>
<code>\xmladdindex {...}</code> <code>* NODE</code>
<code>\xmlafterdocumentsetup {...} {...} {...}</code> <code>1 NAME</code> <code>2 SETUP</code> <code>3 SETUP</code>
<code>\xmlaftersetup {...} {...}</code> <code>1 SETUP</code> <code>2 SETUP</code>
<code>\xmlall {...} {...}</code> <code>1 NODE</code> <code>2 LPATH</code>
<code>\xmlappenddocumentsetup {...} {...}</code> <code>1 NAME</code> <code>2 SETUP</code>
<code>\xmlappendsetup {...}</code> <code>* SETUP</code>
<code>\xmlapplyselectors {...}</code> <code>* NODE</code>
<code>\xmlatt {...} {...}</code> <code>1 NODE</code> <code>2 NAME</code>
<code>\xmlattdef {...} {...} {...}</code> <code>1 NODE</code> <code>2 NAME</code> <code>3 TEXT</code>

\XmlAttribute { ¹ ..} { ² ..} { ³ ..} 1 NODE 2 LPATH 3 NAME
\XmlAttributeDef { ¹ ..} { ² ..} { ³ ..} { ⁴ ..} 1 NODE 2 LPATH 3 NAME 4 TEXT
\XmlBadInclusions { [*] ..} * NODE
\XmlBeforeDocumentSetup { ¹ ..} { ² ..} { ³ ..} 1 NAME 2 SETUP 3 SETUP
\XmlBeforeSetup { ¹ ..} { ² ..} 1 SETUP 2 SETUP
\XmlChainAtt { ¹ ..} { ² ..} 1 NODE 2 NAME
\XmlChainAttDef { ¹ ..} { ² ..} { ³ ..} 1 NODE 2 NAME 3 TEXT
\XmlCheckNamespace { ¹ ..} { ² ..} { ³ ..} 1 NODE 2 NAME 3 NAME
\XmlCommand { ¹ ..} { ² ..} { ³ ..} 1 NODE 2 LPATH 3 XMLSETUP
\XmlConcat { ¹ ..} { ² ..} { ³ ..} 1 NODE 2 LPATH 3 TEXT
\XmlConcatRange { ¹ ..} { ² ..} { ³ ..} { ⁴ ..} { ⁵ ..} 1 NODE 2 LPATH 3 TEXT 4 FIRST 5 LAST
\XmlContext { ¹ ..} { ² ..} 1 NODE 2 LPATH
\XmlCount { ¹ ..} { ² ..} 1 NODE 2 LPATH
\XmlData { [*] ..} * TEXT

\xmldefaulttotext {...} * NODE
\xmldelete {...} {...} 1 NODE 2 LPATH
\xmldepth {...} * NODE
\xmldirect {...} * NODE
\xmldirectives {...} * NODE
\xmldirectivesafter {...} * NODE
\xmldirectivesbefore {...} * NODE
\xmldisplayverbatim {...} * NODE
\xmldocument
\xmldoif {...} {...} {...} 1 NODE 2 LPATH 3 TRUE
\xmldoifatt {...} {...} {...} {...} 1 NODE 2 TEXT 3 TEXT 4 TRUE
\xmldoifelse {...} {...} {...} {...} 1 NODE 2 LPATH 3 TRUE 4 FALSE
\xmldoifelseatt {...} {...} {...} {...} {...} 1 NODE 2 TEXT 3 TEXT 4 TRUE 5 FALSE
\xmldoifelseempty {...} {...} {...} {...} 1 NODE 2 LPATH 3 TRUE 4 FALSE
\xmldoifelseselfempty {...} {...} {...} 1 NODE 2 TRUE 3 FALSE

```
\xmldoifelse text    {..}    {..}    {..}    {..}
1  NODE
2  LPATH
3  TRUE
4  FALSE
```

```
\xmldoifelse value   {..}    {..}    {..}    {..}
1  CATEGORY
2  NAME
3  TRUE
4  FALSE
```

```
\xmldoifempty    {..}    {..}    {..}
1  NODE
2  LPATH
3  TRUE
```

```
\xmldoifemptyelse   {..}    {..}    {..}    {..}
1  NODE
2  LPATH
3  TRUE
4  FALSE
```

```
\xmldoifnot    {..}    {..}    {..}
1  NODE
2  LPATH
3  TRUE
```

```
\xmldoifnotatt    {..}    {..}    {..}    {..}
1  NODE
2  TEXT
3  TEXT
4  TRUE
```

```
\xmldoifnotempty   {..}    {..}    {..}
1  NODE
2  LPATH
3  TRUE
```

```
\xmldoifnotselfempty {..}    {..}
1  NODE
2  TRUE
```

```
\xmldoifnottext    {..}    {..}    {..}
1  NODE
2  LPATH
3  TRUE
```

```
\xmldoifselfempty   {..}    {..}
1  NODE
2  TRUE
```

```
\xmldoifselfemptyelse {..}    {..}    {..}
1  NODE
2  TRUE
3  FALSE
```

```
\xmldoiftext    {..}    {..}    {..}
1  NODE
2  LPATH
3  TRUE
```

\xmldoiftextelse {...} {...} {...} {...} 1 NODE 2 LPATH 3 TRUE 4 FALSE
\xmldoifvalueelse {...} {...} {...} {...} 1 CATEGORY 2 NAME 3 TRUE 4 FALSE
\xmlelement {...} {...} 1 NODE 2 NUMMER
\xmlfileline {...} * NODE
\xmlfilename {...} * NODE
\xmlfilter {...} {...} 1 NODE 2 LPATH
\xmlfirst {...} {...} 1 NODE 2 LPATH
\xmlflush {...} * NODE
\xmlflushcontext {...} * NODE
\xmlflushdocumentsetups {...} {...} 1 NAME 2 SETUP
\xmlflushlinewise {...} * NODE
\xmlflushpure {...} * NODE
\xmlflushsetups {...} * NAME
\xmlflushspacewise {...} * NODE
\xmlflushtext {...} * NODE
\xmlfunction {...} {...} 1 NODE 2 NAME

\xmlinclude {...} {...} {...} 1 NODE 2 LPATH 3 NAME
\xmlincludeoptions {...} {...} {...} {..., ⁴ ...} 1 NODE 2 LPATH 3 NAME 4 recurse prepare rootpath resolve basename
\xmlinclusion {...} * NODE
\xmlinclusionbase {...} * NODE
\xmlinclusions {...} * NODE
\xmlindex {...} {...} {...} 1 NODE 2 LPATH 3 NUMMER
\xmlinfo {...} * NODE
\xmlinjector {...} * NAME
\xmlinlineprettyprint {...} {...} 1 NODE 2 mp lua xml parsed-xml nested tex context niciunul NAME
\xmlinlineprettyprinttext {...} {...} 1 NODE 2 mp lua xml parsed-xml nested tex context niciunul NAME
\xmlinlineverbatim {...} * NODE
\xmlinstalldirective {...} {...} 1 NAME 2 CSNAME
\xmllast {...} {...} 1 NODE 2 LPATH
\xmllastatt
\xmllastmatch
\xmllastpar
\xmlload {...} {...} 1 NAME 2 FILE

\xmlloadbuffer {...} {...} 1 BUFFER 2 NAME
\xmlloadaddata {...} {...} 1 NAME 2 TEXT
\xmlloadaddirectives {...} * FILE
\xmlloadfile {...} {...} 1 NAME 2 FILE
\xmlloadonly {...} {...} {...} 1 NAME 2 FILE 3 XMLSETUP
\xmlmain {...} * NODE
\xmlmapval {...} {...} {...} 1 CATEGORY 2 NAME 3 TEXT
\xmlmapvalue {...} {...} {...} 1 CATEGORY 2 NAME 3 TEXT
\xmlmatch {...} * NODE
\xmlname {...} * NODE
\xmlnamespace {...} * NODE
\xmlnonspace {...} {...} 1 NODE 2 LPATH
\xmlpar {...} {...} 1 NODE 2 NAME
\xmlparam {...} {...} {...} 1 NODE 2 LPATH 3 NAME
\xmlpath {...} * NODE
\xmlpos {...} * NODE

<code>\xmlposition {...} {...} {...}</code> 1 NODE 2 LPATH 3 NUMMER
<code>\xmlprependdocumentsetup {...} {...}</code> 1 NAME 2 SETUP
<code>\xmlprependsetup {...}</code> * SETUP
<code>\xmlprettyprint {...} {...}</code> 1 NODE 2 mp lua xml parsed-xml nested tex context niciunul NAME
<code>\xmlprettyprinttext {...} {...}</code> 1 NODE 2 mp lua xml parsed-xml nested tex context niciunul NAME
<code>\xmlprocess {...} {...} {...}</code> 1 NAME 2 FILE 3 XMLSETUP
<code>\xmlprocessbuffer {...} {...} {...}</code> 1 BUFFER 2 NAME 3 XMLSETUP
<code>\xmlprocessdata {...} {...} {...}</code> 1 NAME 2 TEXT 3 XMLSETUP
<code>\xmlprocessfile {...} {...} {...}</code> 1 NAME 2 FILE 3 XMLSETUP
<code>\xmlpure {...} {...}</code> 1 NODE 2 LPATH
<code>\xmlpushmatch ... \xmlpopmatch</code>
<code>\xmlraw {...}</code> * NODE
<code>\xmlrefatt {...} {...}</code> 1 NODE 2 NAME
<code>\xmlregisterdocumentsetup {...} {...}</code> 1 NAME 2 SETUP
<code>\xmlregistereddokumentsetups {...} {...}</code> 1 NAME 2 SETUP
<code>\xmlregisteredsetups</code>

\xmlregisterns { ¹ ..} { ² ..} 1 NAME 2 URL
\xmlregistersetup { [*] ..} * SETUP
\xmlremapname { ¹ ..} { ² ..} { ³ ..} { ⁴ ..} 1 NODE 2 LPATH 3 NAME 4 NAME
\xmlremapnamespace { ¹ ..} { ² ..} { ³ ..} 1 NODE 2 NAME 3 NAME
\xmlremovedocumentsetup { ¹ ..} { ² ..} 1 NAME 2 SETUP
\xmlremovesetup { [*] ..} * SETUP
\xmlresetdocumentsetups { [*] ..} * NAME
\xmlresetinjectors
\xmlresetsetups
\xmls { ¹ ..} { ² ..} 1 NODE 2 SETUP
\xmlsave { ¹ ..} { ² ..} 1 NODE 2 FILE
\xmlsetatt { ¹ ..} { ² ..} { ³ ..} 1 NODE 2 NAME 3 TEXT
\xmlsetAttribute { ¹ ..} { ² ..} { ³ ..} { ⁴ ..} 1 NODE 2 LPATH 3 NAME 4 TEXT
\xmlsetentity { ¹ ..} { ² ..} 1 NAME 2 TEXT
\xmlsetfunction { ¹ ..} { ² ..} { ³ ..} 1 NODE 2 LPATH 3 LUAFUNCTION
\xmlsetinjectors [... [*] ...]

\xmlsetpar { ¹ ...} { ² ...} { ³ ...} 1 NODE 2 NAME 3 TEXT
\xmlsetparam { ¹ ...} { ² ...} { ³ ...} { ⁴ ...} 1 NODE 2 LPATH 3 NAME 4 TEXT
\xmlsetsetup { ¹ ...} { ² ...} { ³ ...} 1 NAME 2 LPATH 3 SETUP
\xmlsetup { ¹ ...} { ² ...} 1 NODE 2 SETUP
\xmlshow { [*] ...} * NODE
\xmlsnippet { ¹ ...} { ² ...} 1 NODE 2 NUMMER
\xmlstartdraw ... \xmlstopdraw
\xmlstarttiming ... \xmlstoptiming
\xmlstrip { ¹ ...} { ² ...} 1 NODE 2 LPATH
\xmlstripanywhere { ¹ ...} { ² ...} 1 NODE 2 LPATH
\xmlstripeverything { ¹ ...} { ² ...} 1 NODE 2 LPATH
\xmlstripnolines { ¹ ...} { ² ...} 1 NODE 2 LPATH
\xmlstripped { ¹ ...} { ² ...} 1 NODE 2 LPATH
\xmlstrippednolines { ¹ ...} { ² ...} 1 NODE 2 LPATH
\xmltag { [*] ...} * NODE
\xmltexatt { ¹ ...} { ² ...} 1 NODE 2 NAME


\xmltexentity {...} {...} 1 NAME 2 TEXT
\xmltext {...} {...} 1 NODE 2 LPATH
\xmltobuffer {...} {...} {...} 1 NODE 2 LPATH 3 BUFFER
\xmltobuffertextonly {...} {...} {...} 1 NODE 2 LPATH 3 BUFFER
\xmltobufferverbose {...} {...} {...} 1 NODE 2 LPATH 3 BUFFER
\xmltofile {...} {...} {...} 1 NODE 2 LPATH 3 FILE
\xmltoparameters {...} * NODE
\xmlval {...} {...} {...} 1 CATEGORY 2 NAME 3 TEXT
\xmlvalue {...} {...} {...} 1 CATEGORY 2 NAME 3 TEXT
\xmlverbatim {...} * NODE
\xmlw {...} {...} 1 SETUP 2 NODE
\xsplitstring \... {...} 1 CSNAME 2 TEXT
\xypos {...} * NAME
\yddishnumerals {...} * NUMMER
\ZIDINSAPTAMANA {...} * NUMMER

\zeronumberconversion {...}

* NUMMER

\zidinsaptamana {...}

* NUMMER

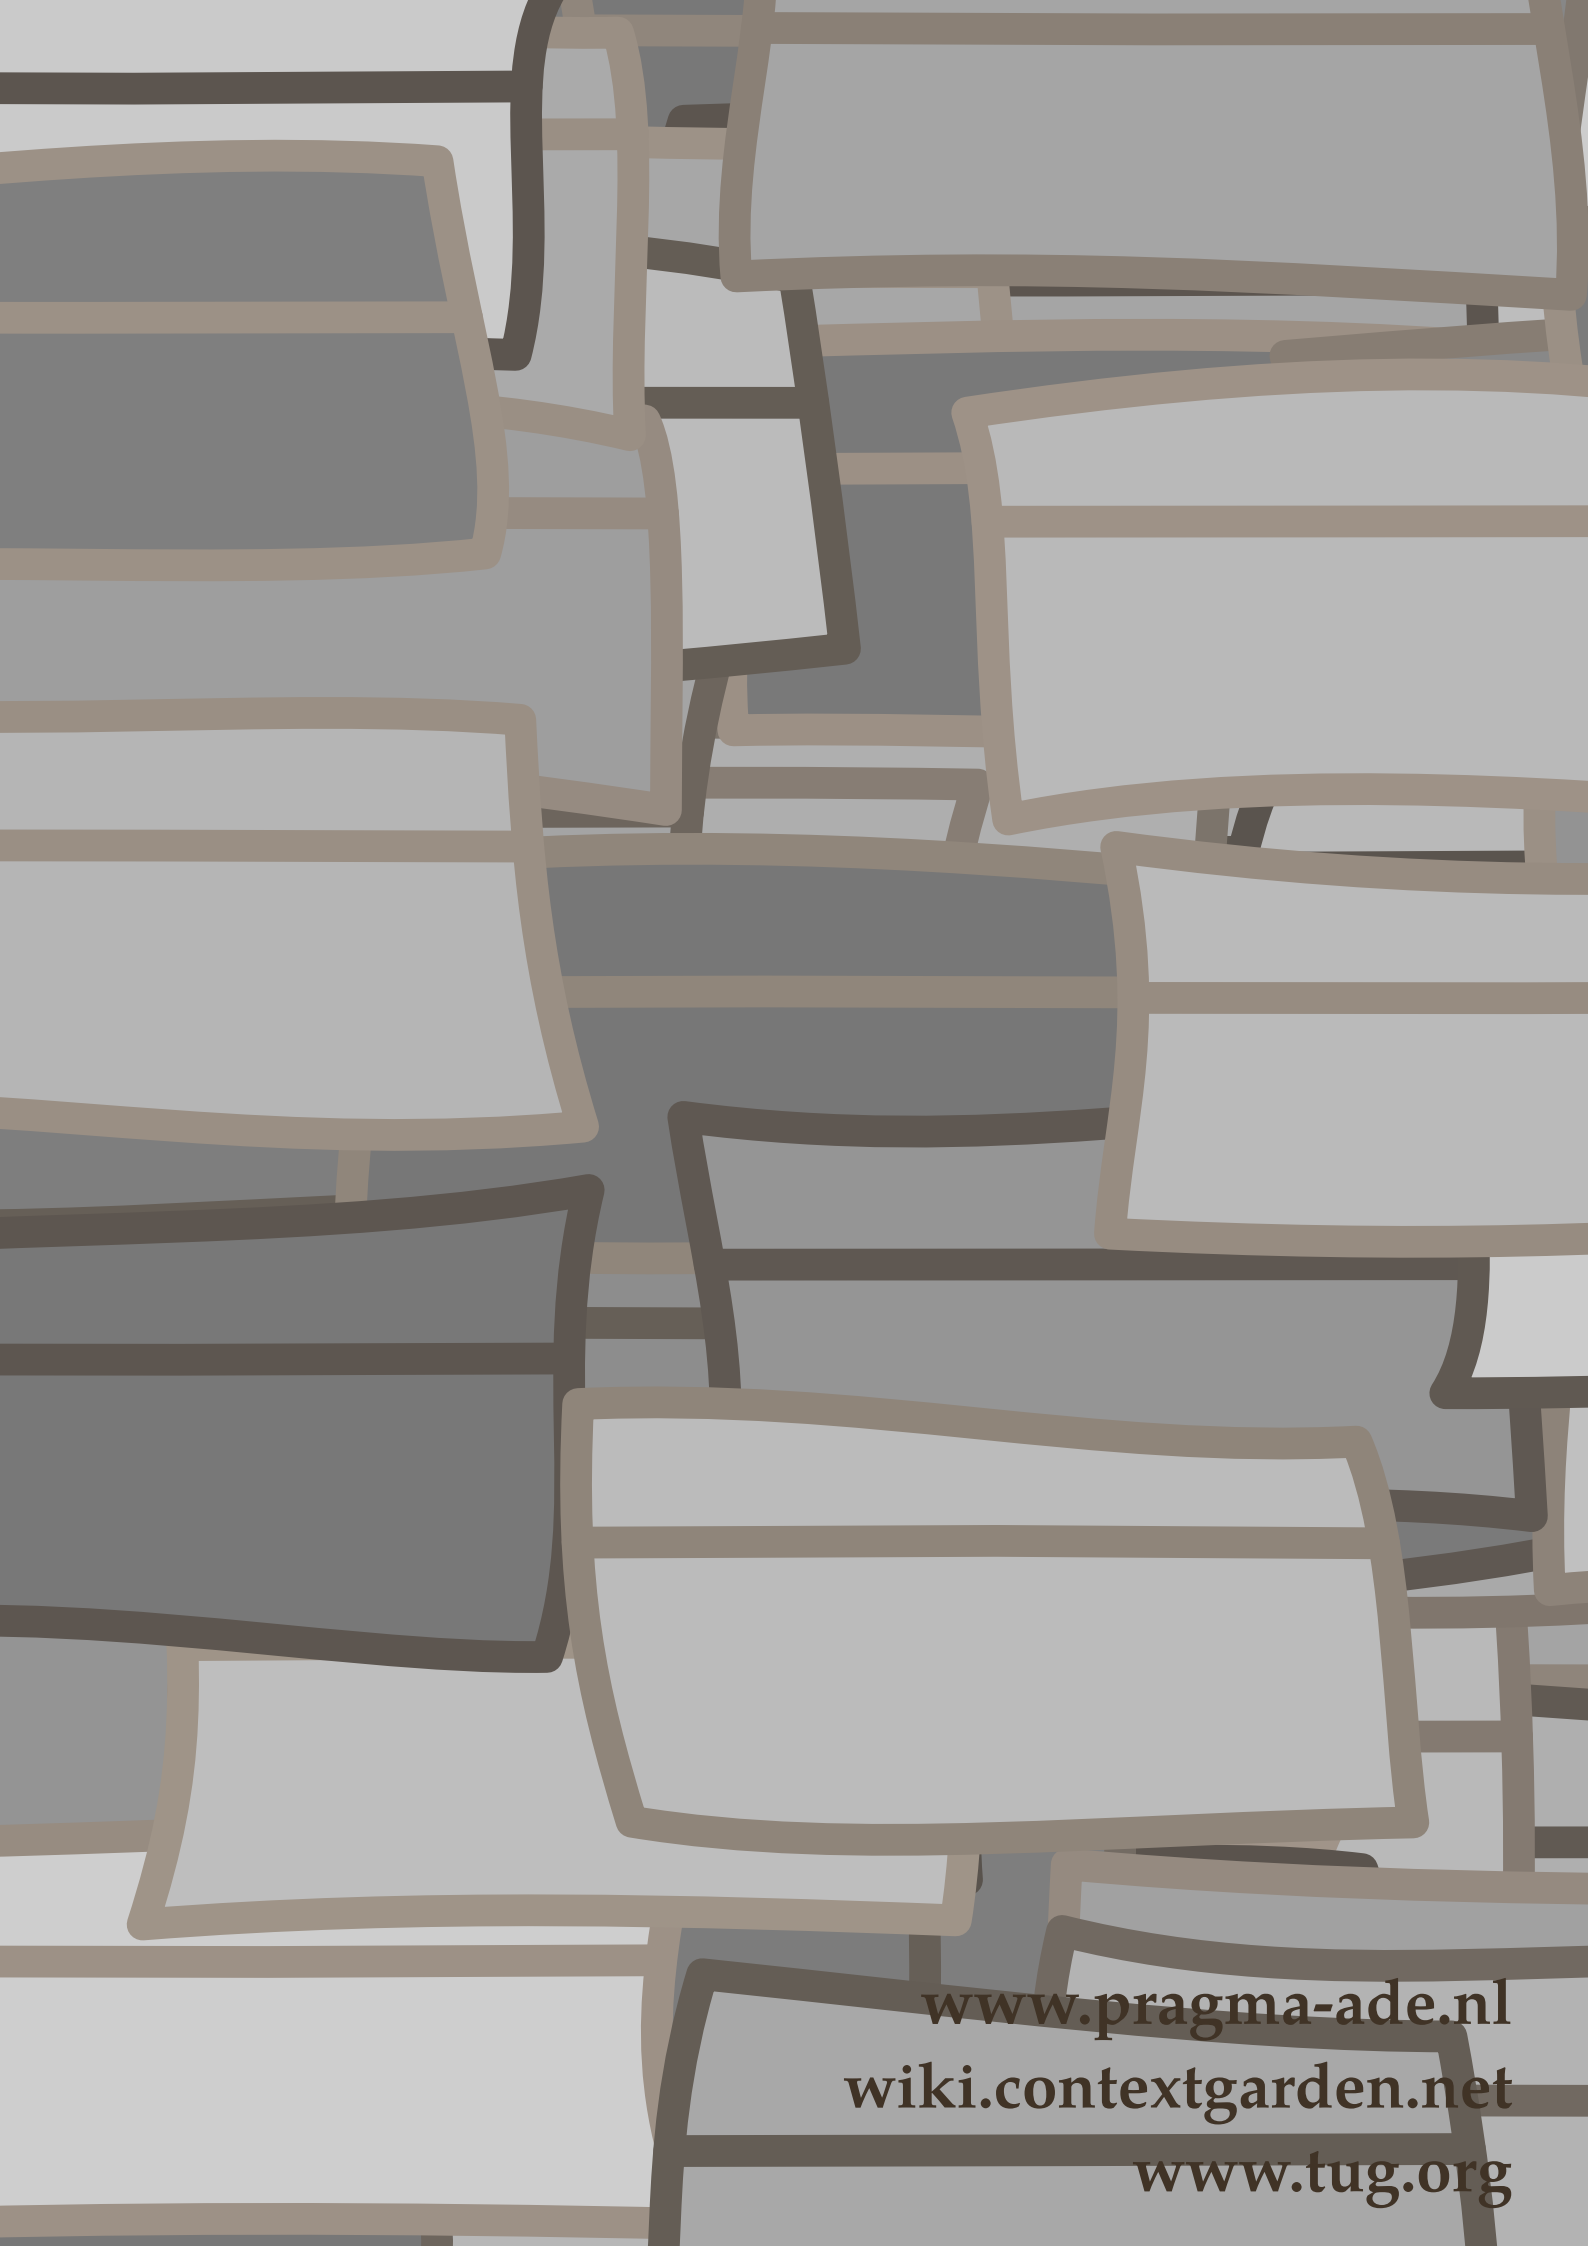

www.pragma-ade.nl
wiki.contextgarden.net
www.tug.org